




Customer data:

Company..... VAST Date..... 20/04/2021
 Address..... 18 Hoang Quoc Viet Phone no. +84916661078
 Ha Noi, Vietnam Fax no.
 Family name, first name Duong Thanh Nam
 E-mail address namduongthanh@gmail.com
 Function/Dept.
 Project

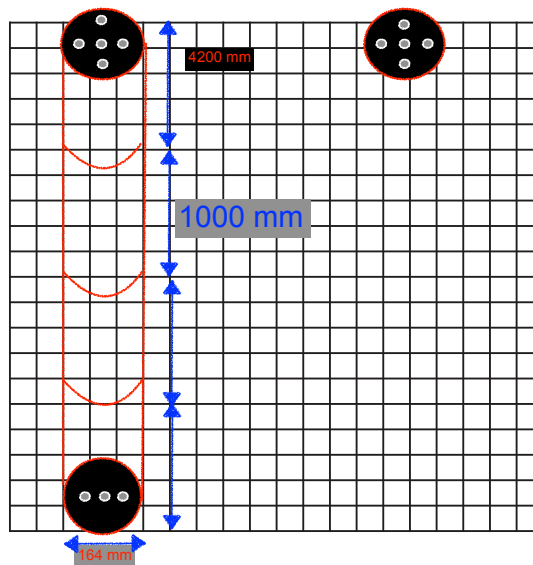

87

Description of requirements

Operating conditions

- ☒ Vacuum
 - p=.....1013.....mbar (rough, high, ultra-high vacuum)
- ☐ Pressure:
 - pmax=..... degC
- ☒ Operating temperature:
 - T min:20 degC
 - T max:40 degC
- ☒ Radiation (ionising)
 - ☐ none
 - ☒ weak
 - ☐ medium
 - ☐ high
- ☐ Medium:
 - ☒ gaseous
 - ☐
 - ☐ inert
 - ☐ reactive, corrosive
 - ☐ liquid
 - ☐
 - ☐ reactive, corrosive
 - ☐ paste
 - ☐ granular(solid)
 - ☐ foodstuff
 - ☐ CIP (Clean in Place)
 - ☐ SIP (Steam in Place)
 - ☐ can be sterilised

Environment:

- ☐ Industry
- ☒ Chemical industry [] reactive, corrosive
- ☐ Sterile
- ☐ Inert gas
- ☐ Subject to detergents, cleaning agents
- ☐ Subject to weather
- ☐ Clean room

Tubes:

Outer diameter: od=..... mm
 Inner diameter: id=.....164..... mm
 Length l=.....4200..... mm

- Material
- ☐ steel
 - ☒ stainless steel
 - ☐ aluminium
 - ☐ nickel-plated aluminium
 - ☐ glass o Duran®
 - ☐ quartz
 - ☐ plastic

☒ for cryogenic, high vacuum, tapered and special applications

Seals:

- Material
- ☐ elastomer
 - ☐ PTFE (Teflon®)
 - ☐ FEP
 - ☒ Kalrez®
 - ☐
 - ☐ metal
 - ☐ aluminium
 - ☐ copper
 - ☐ silver-plated copper
 - ☐ nickel
 - ☐
- ☐ seal diameter: Dmax=mm
 Dmin.=mm
- ☐ seal width: Bmax=mm
 Bmin.=mm

Flanges:

- ☒ standard flange system
 - ☒ ISO-KF (small flange)
 - ☐ ISO-K (clamping flanges)
 - ☐ CF (Conflat®)
 - ☐ tri-clamp
 - ☐
- ☒ special flange system
 - ☒ EVAC ISO Tapered™
 - ☐ EVAC ISO combi
 - ☐ EVAC CeFiX®
 - ☐

Clamping device:

- ☐ screws
- ☐ clamping screws
- ☐ wall clamps
- ☐ chain clamps
- ☒ tightening
 - ☐ by hand
 - ☐ with tool
- ☒ material links
 - ☐ GRP
 - ☐ aluminium
 - ☐ coated aluminium
 - ☒ coated steel
 - ☐ stainless steel
- ☒ material of straps
 - ☐ coated steel
 - ☒ stainless steel




Welded bellows design inquiry

Acceptance no.

To EVAC AG Sender Sign.....
Customer Dept.....(.....) Issue date.....
Name of machine Model #(.....)

Material ☐ SUS316L ☐ AM350 ☐ HC-22 ☐ None specified ☐ Other(.....)
Displacement <Bellows size> <Spec.>
☐ Bellows onlymm ID Ø..... Temp.~.....degC
☐ Including flange Operating range Baking(.....degC)
.....~..... OD Ø..... Life cyclesTimes

88

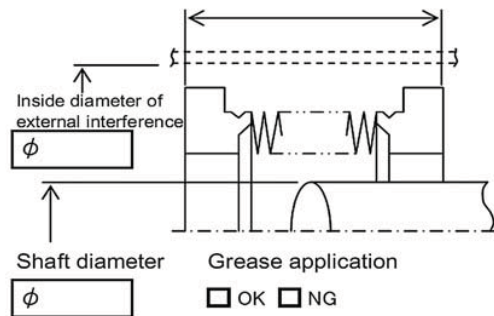

<Pressure>

Inside	☐ Vacuum	☐ Atmospheric pressure	☐ Vacuum to Atmospheric pressure
	(MPa)		
Outside	☐ Gauge pressure	☐ Absolute pressure	
	(MPa)		

☐ Inside and outside are atmosphere operation.
(Only at the time of installation and maintenance)

Helium leak rate ☐ standard (5×10^{-8} mbar l/s) ☐ Customer spec.mbar l/s)
Lateral displacement Xmm Y.....mm ☐ XY complex displacement ☐ XY independent displacement
Angular displacementdegC (Center point of angular displacement)
Displacement speed ☐ max. 100mm/s or less ☐ Max.....mm/s
Mounting posture ☐ horizontal ☐ perpendicular ☐ the horizontal todegC inclination
no. of lot EA/Lot Forecasting.....(EA/...../month,/year)

Product usage and other reports

Customer's drawing DWG: no.: Installing device name
Drawing ☐ application drawing ☐ outline drawing (☐ CAD ☐ sketch) ☐ not wanted Date presentation
Cost ☐ Want ☐ not wanted
Order schedule ☐ Unofficial announcement ☐ Delivery ☐ Design products
Order received

Customer information (opinion and demands for us) Check ✓

	5	3	1
Delivery	☐	☐	☐
Performance	☐	☐	☐
Price	☐	☐	☐

☐ Failure to receive an order Good ← → B