



FIGURE L-12. 10-MICRON NOZZLE ENTRY SECTION

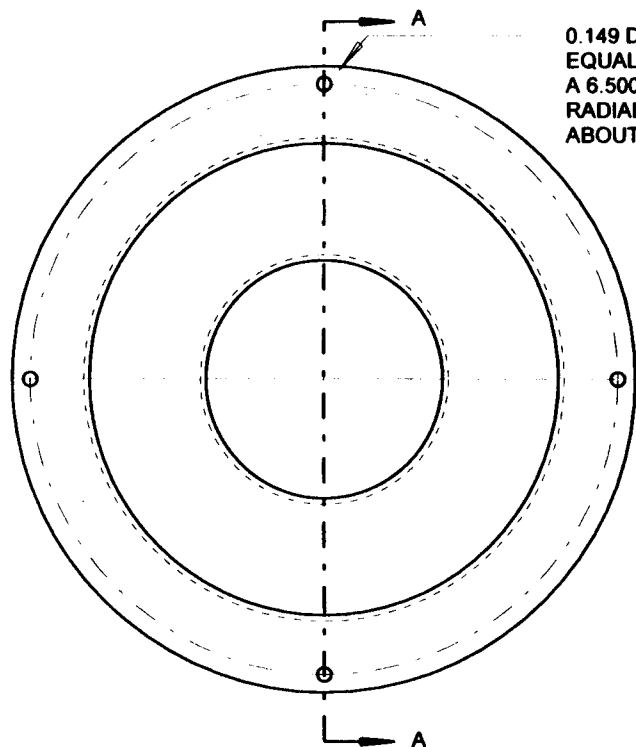

0.149 DIA. 4 PLCS.
EQUALLY SPACED ON
A 6.500 DIA. B.C.
RADIALLY SYMMETRICAL
ABOUT C/L

2.627 $\begin{smallmatrix} +0.002 \\ -0.002 \end{smallmatrix}$
0.80

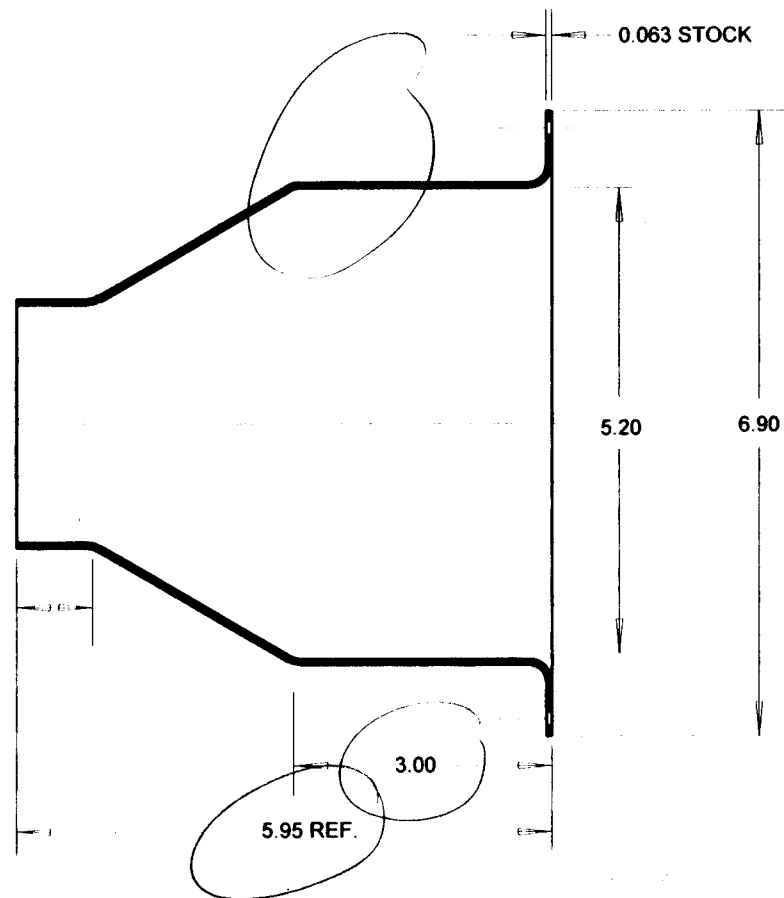

NOTES:

- (1) BEND RADII TO BE MINIMUM PER
COMMERCIAL SPINNING STANDARDS
- (2) BREAK ALL SHARP EDGES
- (3) MATERIAL IS SPUN ALUMINUM 6061-T0,
POST-HEAT TREATED TO -T4
- (4) CLEAR ANODIZE

TOLERANCES			
2 PLCS	3 PLCS	FRAC	ANGLE
± 0.010	± 0.005	$\pm 1/64$	$\pm 1'$

ALL DIMENSIONS ARE INCHES