

Sulfur Dioxide Analyzer



MEZUS 110

| SO₂ Analyzer

MEZUS 110 SO₂ Analyzer is the analyzer that measures minimum amount of SO₂ in air correctly using the UV fluorescence method. The UV lamp with less change of sensitivity used for MEZUS 110 was applied and the self manufactured kicker to remove the obstacle components such as HC is installed.

To prevent the adhesion of specimen, the response chamber and specimen tube of special coating material was used to improve minimum detection and precision.


All gas analyzers of MEZUS series were equipped with screen interface design using TFT-LCD & Touch screen so that user can operate the analyzer and maximize the visual image, and MCU applied to the analyzer is ARM11 32bit processor and operates based on Linux Kernel 2.6 which maximizes the system stability due to multiprocessing.

In addition, the analyzer is equipped with automatic zero correction system (Auto Zero) for smooth measurement and various interfaces (Ethernet, RS232, RS485, USB, DIO, Analog out) so that user can use it more conveniently and usefully.

| Features

- Ranges 0-0.1 / 0.5 / 1 ppm, user selectable.
- 7inch TFT LCD & touch screen interface.
- Ethernet, RS-232, RS-485 & USB ports.
- USB interface utilizes for System Program Update.
- Temperature & pressure compensation
- Internal zero(optional)
- Stored data can be retrieved RS-232, USB Interface and TCP/IP network
- In built Data Logger Utilizes NAND-Flash to Store up to 5min/1year averaged data

Nitrogen Oxides Analyzer

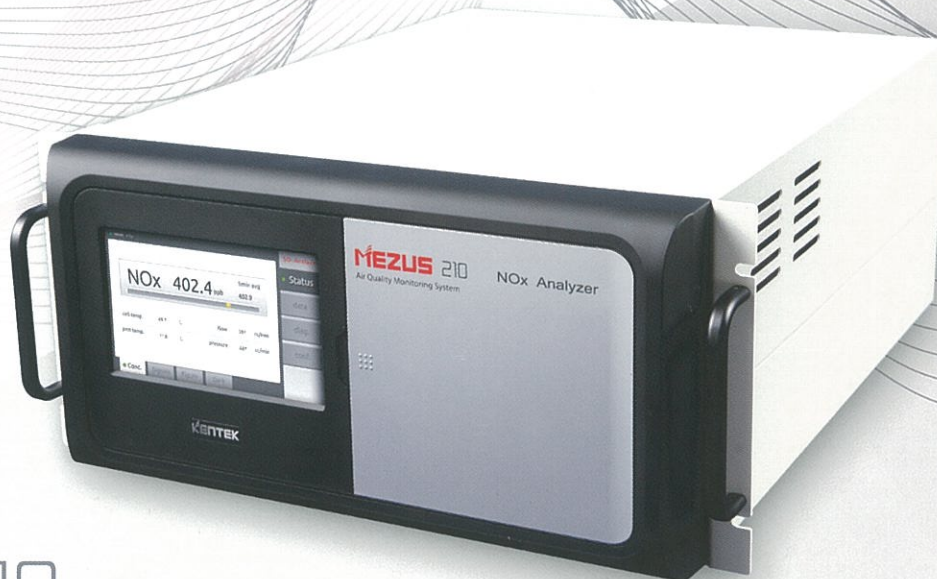

MEZUS 210

| NOx Analyzer

MEZUS 210 NOx Analyzer is the analyzer that measures minimum amount of NOx(NO,NO₂) in air at the same time using the Chemiluminescence.

O₃ Generator used for MEZUS 210 is designed for strong durability with no failure for a long time and NO₂ →NO Converter for measurement of NO₂ is equipped with high efficient cartridge material which improves the change rate near 100%. All temperature adjustment system such as response cell, Converter, PMT, TEMP etc are designed to be entered in the self software which is easy to use.

All gas analyzers of MEZUS series were equipped with screen interface design using TFT-LCD & Touch screen so that user can operate the analyzer and maximize the visual image, and MCU applied to the analyzer is ARM11 32bit processor and operates based on Linux Kernel 2.6 which maximizes the system stability due to multiprocessing.

In addition, the analyzer is equipped with automatic zero correction system (Auto Zero) for smooth measurement and various interfaces (Ethernet, RS232, RS485, USB, DIO, Analog out) so that user can use it more conveniently and usefully.

| Features

- Ranges 0-0.1 / 0.5 / 1 ppm, user selectable.
- 7inch TFT LCD & touch screen interface.
- Ethernet, RS-232, RS-485 & USB ports.
- USB interface utilizes for System Program Update.
- Temperature & pressure compensation
- Internal zero(optional)
- Stored data can be retrieved RS-232, USB Interface and TCP/IP network
- In built Data Logger Utilizes NAND-Flash to Store up to 5min/1year averaged data

Carbon Monoxide Analyzer



MEZUS 310

| CO Analyzer

MEZUS 310 CO Analyzer is the analyzer that measures minimum amount of CO in air correctly through the optical curved mirror which has long light path and durability, using the Non-dispersive Infrared Analysis Method (NDIR GFC). MEZUS 310 is equipped with the specially designed GFC wheel with no leak for a long time and the stable infrared lamp (IR Source).

All gas analyzers of MEZUS series were equipped with screen interface design using TFT-LCD & Touch screen so that user can operate the analyzer and maximize the visual image, and MCU applied to the analyzer is ARM11 32bit processor and operates based on Linux Kernel 2.6 which maximizes the system stability due to multiprocessing.

In addition, the analyzer is equipped with automatic zero correction system (Auto Zero) for smooth measurement and various interfaces (Ethernet, RS232, RS485, USB, DIO, Analog out) so that user can use it more conveniently and usefully.

| Features

- Ranges 0-50 / 100 ppm, user selectable.
- 7inch TFT LCD & touch screen interface.
- Ethernet, RS-232, RS-485 & USB ports.
- USB interface utilizes for System Program Update.
- Temperature & pressure compensation
- Internal zero(optional)
- Stored data can be retrieved RS-232, USB Interface and TCP/IP network
- In built Data Logger Utilizes NAND-Flash to Store up to 5min/1year averaged data

Carbon Dioxide Analyzer



MEZUS 320

| CO₂ Analyzer

MEZUS 320 CO₂ Analyzer is the analyzer that measures minimum amount of CO₂ in air correctly through the optical curved mirror which has long light path and durability, using the Non-dispersive Infrared Analysis Method (NDIR GFC). MEZUS 320 is equipped with the specially designed GFC wheel with no leak for a long time and the stable infrared lamp (IR Source).

All gas analyzers of MEZUS series were equipped with screen interface design using TFT-LCD & Touch screen so that user can operate the analyzer and maximize the visual image, and MCU applied to the analyzer is ARM11 32bit processor and operates based on Linux Kernel 2.6 which maximizes the system stability due to multiprocessing.

In addition, the analyzer is equipped with automatic zero correction system (Auto Zero) for smooth measurement and various interfaces (Ethernet, RS232, RS485, USB, DIO, Analog out) so that user can use it more conveniently and usefully.

| Features

- Ranges 0-500 / 1,000 / 2,000 ppm, user selectable.
- 7inch TFT LCD & touch screen interface.
- Ethernet, RS-232, RS-485 & USB ports.
- USB interface utilizes for System Program Update.
- Temperature & pressure compensation
- Internal zero(optional)
- Stored data can be retrieved RS-232, USB Interface and TCP/IP network
- In built Data Logger Utilizes NAND-Flash to Store up to 5min/1year averaged data

Ozone Analyzer



MEZUS 410

| O₃ Analyzer

MEZUS 410 O₃ Analyzer is the analyzer that measures minimum amount of O₃ in air correctly using the UV absorption method. The analyzer is equipped with high performance and high efficiency O₃ Scrubber and used the specimen tube of special coating and materials to remove the obstacle components and prevent the adhesion of specimen for the measurement of minimum amount of ozone.

All gas analyzers of MEZUS series were equipped with screen interface design using TFT-LCD & Touch screen so that user can operate the analyzer and maximize the visual image, and MCU applied to the analyzer is ARM11 32bit processor and operates based on Linux Kernel 2.6 which maximizes the system stability due to multiprocessing.

In addition, the analyzer is equipped with automatic zero correction system (Auto Zero) for smooth measurement and various interfaces (Ethernet, RS232, RS485, USB, DIO, Analog out) so that user can use it more conveniently and usefully.

| Features

- Ranges 0-0.1 / 0.5 / 1 ppm, user selectable.
- 7inch TFT LCD & touch screen interface.
- Ethernet, RS-232, RS-485 & USB ports.
- USB interface utilizes for System Program Update.
- Temperature & pressure compensation
- Internal zero(optional)
- Stored data can be retrieved RS-232, USB Interface and TCP/IP network
- In built Data Logger Utilizes NAND-Flash to Store up to 5min/1year averaged data