


con::lyte

- low-cost terminal for control applications
- power efficient LCD display and ergonomic UI
- sensor and station management of up to 2 (eco) or 6 (pro) parameters
- control of automatic cleaning, data logging, sample & calibration, sensor function check and easy data transfer via USB-stick
- process interface to SCADA or con::cube via Modbus RTU, Profibus DP, analog 4-20 mA and relay outputs (state/PWM/Pulse)
- integration of third-party sensors via analog and digital I/Os
- outstanding control features: easy threshold and alarm limits with hysteresis, 3 opt. PID or 2-point controllers
- certifications: CE, UL, CSA and RCM

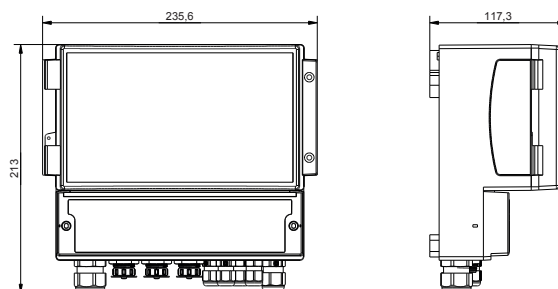

technical specification

display	LCD
function indicator	2 x LED
operation via	keypad
onboard memory	512 MB
interface to SCADA	Modbus RTU (optional), Profibus DP (optional), analog outputs
data transfer	USB stick
power supply	100-240 VAC (50-60 Hz)
power consumption (max.)	25 W
analog inputs	1 x 0/4-20 mA
outputs for automatic cleaning	1 (2nd cleaning device via relay output)
digital inputs	2
digital input flow detector	1
relay outputs	2 x 6A (600 VAC)
system error relay	1 x 6A (600 VAC)
dimensions (width x height x depth)	235.6 x 213 x 117.3 mm
housing material	PC
weight (min.)	1300 g
operating humidity	5 ... 90 %
storage temperature	-20 ... 50 °C
storage humidity	5 ... 90 %
ingress protection class	IP65
conformity - EMC	EN 61326-1
conformity - safety	EN 61010-1
conformity - RoHS 2	EN 50581

con::lyte eco (2 parameters)

integration of	1 x i::scan, s::can sensor or s::can ISE probe
interface to s::can sensors	1 x sys plug, RS485
analog outputs	2 x 4-20 mA
operating temperature (eco)	-20 ... 45 °C
part number 230V	D-320-eco-230

con::lyte pro (6 parameters)


integration of	pro1: i::scan, s::can sensors/ISE probes; pro2: s::can G::series, i::scan, s::can sensors/ISE probes
interface to s::can spectrometric probes	D320-pro2: 1 x MIL, RS485
interface to s::can sensors	D-320-pro1: 3 x sys plug, RS485 D-320-pro2: 2 x sys plug, RS485
analog outputs (optional license)	3 x 4-20 mA
analog outputs (optional module)	2 x 4-20 mA / 4 x 4-20 mA
operating temperature (pro1)	-20 ... 45 °C
operating temperature (pro2)	-20 ... 50 °C
part number 230V	D-320-pro1-230, D-320-pro2-230

recommended accessories

part number	article name
C-31-eu	Optional 2 m power cable
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
D-319-logger	Datalogger option for con::lyte
D-319-out-profibus	Profibus (output module for con::lyte)
D-320-PID	3 x PID control output for con::lyte D-320
D-320-out-mA	License for 3 analog outputs (4-20 mA) for con::lyte pro

con::nect V3

- s::can connection device for one spectrometer V3 probe and one cleaning device
- expand con::cube/con::lyte sensors networks (longer distances and higher number of sensors)
- operation of one s::can spectrometer V3 probe
- RJ45 connector for wired network access

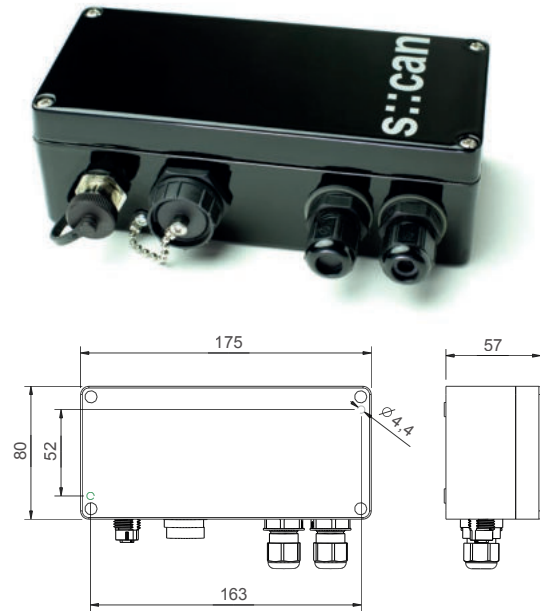

technical specification

integration of	1 x s::can spectrometer V3 probe with one cleaning device
operation via	via PC / notebook / any third party device
interface to s::can spectrometric probes	M12 RSTS 8Y (IP67), RS485, Ethernet
interface to PC	Ethernet (RJ45)
interface to SCADA	REST API / RS485
data transfer	via PC (visu::tool)
power supply	12 VDC

power consumption (max.)	passive device
outputs for automatic cleaning	1
dimensions (width x height x depth)	80 x 175 x 57 mm (w/o cable bushing)
housing material	AlSi12, powder coated
weight (min.)	600 g
operating temperature	-20 ... 50 °C
storage temperature	-20 ... 50 °C
ingress protection class	IP65
part number	B-33-012

recommended accessories

part number	article name
S-31-visu (visu::tool lyte)	visu::tool lyte/pro - Data Visualisation and Analysis Tool
S-34-visu (visu::tool pro)	
C-31-eu	Optional 2 m power cable
C-31-us	Optional 2 m power cable