


ammo::lyser™

- s::can plug & measure
- measuring principle: ISE (ionselective electrodes)
- multiparameter probe
- ammo::lyser™ II eco: monitors $\text{NH}_4\text{-N}$ and temperature
- ammo::lyser™ IV pH + Cl⁻: monitors $\text{NH}_4\text{-N}$, temperature and Chloride
- ammo::lyser™ IV pro + pH monitors $\text{NH}_4\text{-N}$, temperature, pH (with potassium compensation)
- long term stable, factory precalibrated
- automatic cleaning with compressed air
- easy & quick mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- ISE refurbishment - the easy way to minimise maintenance
- unique, non-porous / non-leaking reference electrode for technically unrivalled and consistent performance
- operation via s::can terminals & s::can software
- automatical temperature and potassium, pH compensation possible
- ideal for surface water, ground water, drinking water and waste water
- minimal maintenance
- life time of ISE: typically 6 month
(for applications <1mg/l $\text{NH}_4\text{-N}$, Cl⁻), resp. 1 to 2 years
(for applications >1mg/l $\text{NH}_4\text{-N}$, Cl⁻)

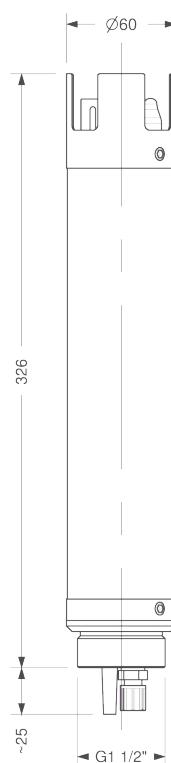

recommended accessories

part number	article name
F-11-ammo	carrier ammo::lyser™
F-44-ammo	flow cell for ammo::lyser™
F-50-2-eco	system panel for s::can ISE probes or s::can sensors
F-50-2-pro	
C-210-sensor	10 m extension cable for s::can sensors and s::can ISE probes
B-44	cleaning valve

technical specification			
measuring principle	ISE	interface connection to s::can terminals	sys plug, IP 68, RS485, 12 VDC
measuring principle detail	NH ₄ -N: ionophore membrane K: ionophore membrane pH: non-porous reference electrode Cl ⁻ : ionophore membrane	cable length	10 m
measuring range application	0 ... 1000 mg/l NH ₄ -N and Cl ⁻ (factory precalibrated: 0.1 ... 100 mg/l NH ₄ -N)	cable type	PU jacket 2x2x0.25
resolution	NH ₄ -N: 0.02 ... 19.99 mg/l NH ₄ -N: 20.0 ... 99.9 mg/l NH ₄ -N: 100 ... 1000 mg/l pH: 0.01 pH T: 0.1 °C	housing material	stainless steel 1.4571, POM-C, glas electrodes
accuracy	+/-3% of measuring range or +/-0.5 mg/l NH ₄ -N (and Cl ⁻) whichever is higher	weight (min.)	2.7 kg
automatic compensation cross sensitivities	type E-532-eco: temperature type E-532-pro-pH: temperature, pH, K type E-532-pH-Cl ⁻ : temperature, pH	dimensions (diameter x length)	60 x 326 mm
precalibrated ex-works	all parameters	operating temperature	0 ... 60 °C
response time	60 sec.	storage temperature	0 ... 60 °C
integration via	con::lyte 1 con::lyte 2 con::lyte 4 con::stat con::cube	operating pressure	0 ... 400 mbar
power supply	10 ... 30 VDC	installation / mounting	submersed or in a flow cell
power consumption (typical)	0.72 W	process connection	G 1 1/2" outside
		flowrate	0.01 m/s (min.) 3 m/s (max.)
		protection class	IP 68
		automatic cleaning	media: compressed air permissible pressure: 3 ... 6 bar air volume: 3 ... 9 liters per cleaning cleaning duration: 4 ... 12 seconds per cleaning cleaning interval: 30 ... 120 minutes, depending on application delay: 10 ... 30 seconds
		conformity - EMC	EN 50081-1:1992 EN 50082-1:1992 EN 60555-2:1987 EN 60555-3:1987
		conformity - safety	EN 61010-1:2001

surface water							
		typical concentration ranges for this application					
		NH ₄ -N [mg/l]	Cl ⁻ [mg/l]	K [mg/l]	pH [pH]	temperature [°C]	part number
ammo::lyser™ III eco (NH ₄ -N, temp)	min.	0		0		0	E-532-eco
	max.	1000		1000		60	
ammo::lyser™ IV ph + Cl ⁻ (NH ₄ -N, pH, Cl ⁻ , temp)	min.	0	0		0	0	E-532-pH + Cl ⁻
	max.	1000	1000		14	60	
ammo::lyser™ IV pro+pH (NH ₄ -N, pH, K, temp)	min.	0		0	0	0	E-532-pro+pH
	max.	1000		1000	14	60	