


# con::lyte

- s::can low-cost terminal designed for control applications
- power efficient LCD display and ergonomic user interface
- sensor and station management of up to 2 (eco) or 6 (pro) parameters
- control of automatic cleaning, data logging, sample & calibration, sensor function check and easy data transfer via USB-stick
- process interface to SCADA or con::cube via Modbus RTU, Profibus DP, analog 4-20 mA and relay outputs (state/PWM/Pulse)
- integration of third-party sensors via analog 0/4-20 mA input and digital (solid state/count) inputs
- outstanding control features: easy threshold and alarm limits with hysteresis, 3 optional PID or 2-point controllers
- certifications: CE, UL, CSA and RCM

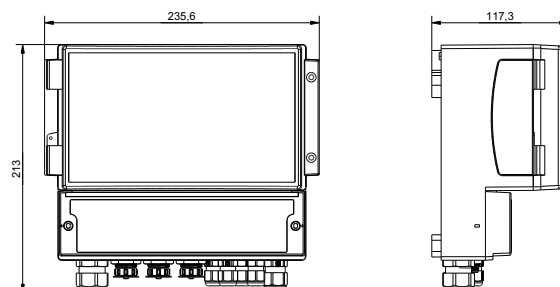

## technical specification

|                                     |                                                               |
|-------------------------------------|---------------------------------------------------------------|
| display                             | LCD                                                           |
| function indicator                  | 2 x LED                                                       |
| operation via                       | keypad                                                        |
| onboard memory                      | 512 MB                                                        |
| interface to SCADA                  | Modbus RTU (optional), Profibus DP (optional), analog outputs |
| data transfer                       | USB stick                                                     |
| power supply                        | 100-240 VAC (50-60 Hz)                                        |
| power consumption (max.)            | 25 W                                                          |
| analog inputs                       | 1 x 0/4-20 mA                                                 |
| outputs for automatic cleaning      | 1 (2nd cleaning device via relay output)                      |
| digital inputs                      | 2                                                             |
| digital input flow detector         | 1                                                             |
| relay outputs                       | 2 x 6A (600 VAC)                                              |
| system error relay                  | 1 x 6A (600 VAC)                                              |
| dimensions (width x height x depth) | 235.6 x 213 x 117.3 mm                                        |
| housing material                    | PC                                                            |
| weight (min.)                       | 1300 g                                                        |
| operating humidity                  | 5 ... 90 %                                                    |
| storage temperature                 | -20 ... 50 °C                                                 |
| storage humidity                    | 5 ... 90 %                                                    |
| ingress protection class            | IP65                                                          |
| conformity - EMC                    | EN 61326-1                                                    |
| conformity - safety                 | EN 61010-1                                                    |
| conformity - RoHS 2                 | EN 50581                                                      |

## con::lyte eco (2 parameters)

|                             |                                                |
|-----------------------------|------------------------------------------------|
| integration of              | 1 x i::scan, s::can sensor or s::can ISE probe |
| interface to s::can sensors | 1 x sys plug, RS485                            |
| analog outputs              | 2 x 4-20 mA                                    |
| operating temperature (eco) | -20 ... 45 °C                                  |
| part number 230V            | D-320-eco-230                                  |

## con::lyte pro (6 parameters)

|                                          |                                                                                                                                    |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| integration of                           | D-320-pro1: i::scan, s::can sensors, s::can ISE probes<br>D-320-pro2: s::can G::series, i::scan, s::can sensors, s::can ISE probes |
| interface to s::can spectrometric probes | D320-pro2: 1 x MIL, RS485                                                                                                          |
| interface to s::can sensors              | D-320-pro1: 3 x sys plug, RS485<br>D-320-pro2: 2 x sys plug, RS485                                                                 |
| analog outputs (optional license)        | 3 x 4-20 mA                                                                                                                        |
| analog outputs (optional module)         | 2 x 4-20 mA / 4 x 4-20 mA                                                                                                          |
| operating temperature (pro1)             | -20 ... 45 °C                                                                                                                      |
| operating temperature (pro2)             | -20 ... 50 °C                                                                                                                      |
| part number 230V                         | D-320-pro1-230<br>D-320-pro2-230                                                                                                   |

## recommended accessories

| part number        | article name                                             |
|--------------------|----------------------------------------------------------|
| C-31-eu            | Optional 2 m power cable                                 |
| D-319-logger       | Datalogger option for con::lyte                          |
| D-319-out-profibus | Profibus (output module for con::lyte)                   |
| D-319-out-mA       | 2 x 4 - 20 mA (output module for con::lyte)              |
| D-319-out-modbus   | Modbus/RTU (output module for con::lyte)                 |
| D-320-PID          | 3 x PID control output for con::lyte D-320               |
| D-320-out-mA       | license for 3 analog outputs (4-20 mA) for con::lyte pro |