

# ammo::lyser™ eco

ammo::lyser™ II eco: monitors  $\text{NH}_4\text{-N}$  and temperature

ammo::lyser™ III eco+pH additionally monitors pH

ammo::lyser™ III eco+ $\text{NO}_3\text{-N}$  additionally monitors  $\text{NO}_3\text{-N}$

ammo::lyser™ III eco+Cl<sup>-</sup> additionally monitors chloride


ammo::lyser™ IV eco+pH+ $\text{NO}_3\text{-N}$  additionally monitors pH and  $\text{NO}_3\text{-N}$

ammo::lyser™ VI eco+pH+Cl<sup>-</sup> additionally monitors pH and chloride

- s::can plug & measure
- measuring principle: ISE (ionselective electrodes) - without potassium compensation
- multiparameter probe
- long term stable, factory precalibrated
- minimal maintenance, automatic cleaning with compressed air
- unique, non-porous / non-leaking reference electrode for technically unrivalled and consistent performance
- ISE refurbishment - the easy way to minimise maintenance
- easy & quick mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- automatic temperature compensation and pH compensation possible
- ideal for surface water, ground water, drinking water and waste water
- life time of ISE: typically 6 month (for applications <1mg/l  $\text{NH}_4\text{-N}$ ), resp. 1 to 2 years (for applications >1mg/l  $\text{NH}_4\text{-N}$ )
- plug connection or fixed cable

## recommended accessories

| part number   | article name                                                          |
|---------------|-----------------------------------------------------------------------|
| B-44          | cleaning valve                                                        |
| B-44-2        |                                                                       |
| C-210-sensor  | 10 m extension cable for s::can physical probes and s::can ISE probes |
| F-11-oxi-ammo | carrier oxi::lyser / soli::lyser / s::can ISE probes                  |
| F-48-ammo     | ammo::lyser flow-cell (by-pass setup), PVC                            |
| D-330-xxx     | con::cube V3                                                          |
| D-320-xxx     | con::lyte                                                             |

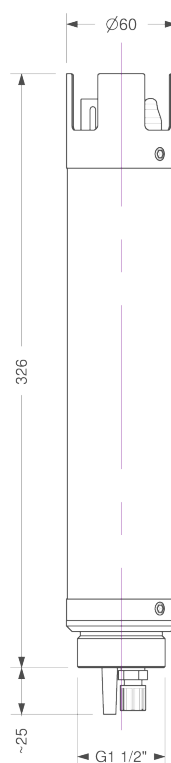

## technical specification

|                                            |                                                                                                                                                                               |                                 |                                                            |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|------------------------------------------------------------|
| measuring principle                        | ISE                                                                                                                                                                           | power consumption (typical)     | 0.72 W                                                     |
| measuring principle detail                 | NH4-N: ionophore membrane<br>pH: non-porous reference electrode<br>NO3-N: ionophore membrane<br>Cl-: ionophore membrane                                                       | interface to s::can terminals   | sys plug (IP67), RS485                                     |
| resolution                                 | NH4-N, K, NO3-N, Cl, F:<br>0.01 at 0.02 ... 19.99 mg/l<br>0.1 at 20.0 ... 99.9 mg/l<br>1 at 100 ... 1000 mg/l<br>T: 0.1 °C                                                    | cable length                    | 7.5 m fixed cable (-075) or<br>plug connection (-000)      |
| accuracy (standard solution)               | NH4-N: +/- 3% or +/- 0.5mg/l*<br>(*whichever is greater)                                                                                                                      | cable type                      | PU jacket                                                  |
| automatic compensation cross sensitivities | E-532-eco-xxx: temp<br>E-532-eco-pH-xxx: temp, pH<br>E-532-eco-NO3-N-xxx: temp<br>E-532-eco-NO3-N-pH-xxx: temp, pH<br>E-532-eco-CL-xxx: temp<br>E-532-eco-CL-pH-xxx: temp, pH | housing material                | stainless steel 1.4571, POM-C                              |
| precalibrated ex-works                     | all parameters                                                                                                                                                                | weight (min.)                   | 2.7 kg                                                     |
| response time (T90)                        | 0 ... 60 sec.                                                                                                                                                                 | dimensions (Ø x l)              | 60 x 326 mm                                                |
| integration via                            | con::cube<br>con::lyte<br>con::nect                                                                                                                                           | operating temperature           | 0 ... 60 °C                                                |
| power supply                               | 10 ... 30 VDC                                                                                                                                                                 | operating pressure              | 0 ... 1 bar                                                |
|                                            |                                                                                                                                                                               | installation / mounting         | submersed or in a flow cell                                |
|                                            |                                                                                                                                                                               | process connection              | bayonet                                                    |
|                                            |                                                                                                                                                                               | flow velocity                   | 0.01 m/s (min.), 3 m/s (max.)                              |
|                                            |                                                                                                                                                                               | automatic cleaning              | media: compressed air<br>permissible pressure: 2 ... 4 bar |
|                                            |                                                                                                                                                                               | storage temperature (electrode) | 2 ... 40 °C                                                |
|                                            |                                                                                                                                                                               | storage temperature (sensor)    | 2 ... 40 °C                                                |
|                                            |                                                                                                                                                                               | conformity - EMC                | EN 50081-1, EN 50082-1, EN 60555-2, EN 60555-3             |
|                                            |                                                                                                                                                                               | conformity - safety             | EN 61010-1                                                 |
|                                            |                                                                                                                                                                               | protection class (-000)         | IP67                                                       |
|                                            |                                                                                                                                                                               | protection class (-075)         | IP68                                                       |

## measuring range

|                                                                                                 |      | parameter                    |                              |            |                     |                                            |
|-------------------------------------------------------------------------------------------------|------|------------------------------|------------------------------|------------|---------------------|--------------------------------------------|
|                                                                                                 |      | NH <sub>4</sub> -N<br>[mg/l] | NO <sub>3</sub> -N<br>[mg/l] | pH<br>[pH] | temperature<br>[°C] | part number                                |
| ammo::lyser™ II eco<br>(NH <sub>4</sub> -N, temp)                                               | min. | 0.1                          |                              |            | 0                   | E-532-eco-000 / -075                       |
|                                                                                                 | max. | 1000                         |                              |            | 60                  |                                            |
| ammo::lyser™ III eco+NO <sub>3</sub> -N<br>(NH <sub>4</sub> -N, temp, NO <sub>3</sub> -N)       | min. | 0.1                          | 0.3                          |            | 0                   | E-532-eco-NO <sub>3</sub> -N-000 / -075    |
|                                                                                                 | max. | 1000                         | 1000                         |            | 60                  |                                            |
| ammo_lyser_III_eco_pH<br>(NH <sub>4</sub> -N, Temp, pH)                                         | min. | 0.1                          |                              | 2          | 0                   | E-532-eco-pH-000 / -075                    |
|                                                                                                 | max. | 1000                         |                              | 12         | 60                  |                                            |
| ammo::lyser™ IV eco+NO <sub>3</sub> -N+pH<br>(NH <sub>4</sub> -N, temp, NO <sub>3</sub> -N, pH) | min. | 0.1                          | 0.3                          | 2          | 0                   | E-532-eco-NO <sub>3</sub> -N-pH-000 / -075 |
|                                                                                                 | max. | 1000                         | 1000                         | 12         | 60                  |                                            |