

ELH SERIES

Calibration Chambers with Precise Controls and Chilled Mirror Accuracy

The ELH Series is a series of Bench Mount, 304 Stainless Steel, NIST Traceable, Relative Humidity ($\pm 0.5\%$ typical), Temperature ($\pm 0.1^\circ\text{C}$) and Dew Point ($\pm 0.2^\circ\text{C}$) Calibration Chambers.

Complete with integral mounted DewMaster Chilled Mirror Hygrometer, Model DM-DS2-RC, a programmable controller for Temperature and Dew Point or Humidity control.

Measurements in $^\circ\text{C}/^\circ\text{F}$ or % RH, voltage and current outputs, RS232, with a 2 inch access port, a demineralization cartridge system, instruction manual and one year warranty. All chambers use an environmentally safe non-depleting refrigerant.


BENEFITS

- Reduces Uncertainty
- Easy to Provide NIST Recertification
- Proven Methodology
- Reliable Data
- Extremely Stable and Uniform Environment
- Worry-free Operation



FEATURES

- Precise Chamber Controls
- Hygrometer Utilizes Primary Measurement Techniques
- Historically Proven and Unsurpassed Humidity Control System
- Highly Accurate NIST Traceable Sensors
- Sensing System Discriminates Between Dew and Contaminants
- Programmable Controller for Automatic Ramping, Soaking and Alarming.
- Stainless Steel Interior
- Fully Adjustable Shelf
- Demineralizer Cartridge System
- 2" Access Port
- Drain: Hard Piped

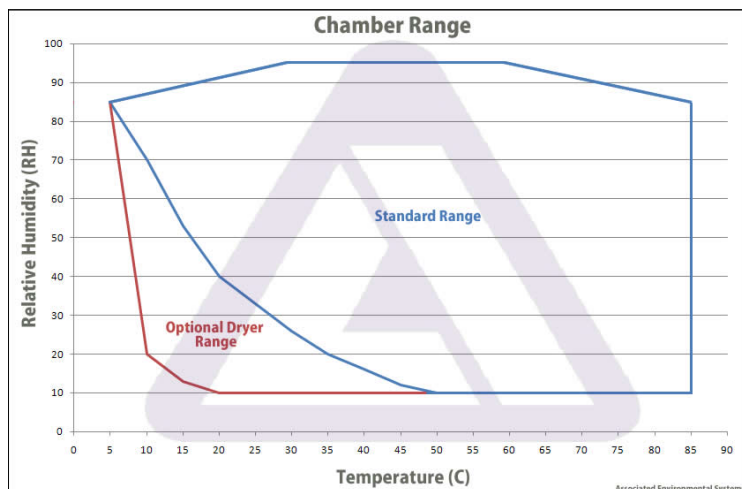

SPECIFICATIONS

TEMPERATURE RANGE: 7 to 85° C
TEMPERATURE UNIFORMITY: $\pm 0.3^{\circ}$ C
TEMPERATURE CONTROL: $\pm 0.3^{\circ}$ C

RH RANGE: 10-95% at temperature range from 50°C to 85°C; 20%RH at 35° C
RH UNIFORMITY: $\pm 0.5\%$ For lower RH consult factory
RH CONTROL: $\pm 0.4\%$

ELH-1.5 Bench mount 1.5cu.ft. Calibration Chamber
Internal dimensions: 13" x 14" x 13" (33cm x 35.5cm x 33cm)
External dimensions: 33" x 27" x 26" (85cm x 69cm x 66cm)
Power requirements: 110Vac/60Hz or 220Vac/50Hz 20A single phase
Weight: 192lbs (87kg)

ELH-6 Bench mount 5.8cu.ft. Calibration Chamber
Internal dimensions: 24" x 20" x 18" (61cm x 51cm x 46cm)
External dimensions: 46" x 33" x 31" (117cm x 84cm x 79cm)
Power requirements: 110Vac/60Hz or 220Vac/50Hz 20A single phase
Weight: 280lbs (127kg)

ELH-10 Bench mount 10cu.ft. Calibration Chamber
Internal dimensions: 30" x 24" x 24" (76cm x 61cm x 61cm)
External dimensions: 52" x 36" x 37" (132cm x 91cm x 94cm)
Power requirements: 110Vac/60Hz or 220Vac/50Hz 20A single phase
Weight: 310lbs (140kg)

OPTIONS

- ▶ Additional Stainless Steel Shelf
- ▶ 8" x 8" (203cm x 203cm) Window
- ▶ Internal Light with External Switch
- ▶ Demineralizer Replacement Cartridges
- ▶ Extended Temperature Range to -20°C
- ▶ 2 pen / 10" Chart Recorder
- ▶ Self-contained Re-circulating Humidity System with 6 Gallon Reservoir

