

Instruction Manual

Central Zero Gas Supply

ZNV-7



CONTENS

Page

1	Functional principal	3
2	Technical data:	4
3	Front view	5
4	Rear view	6
5	Internal view	7
6	Flow schematic	8
7	Electrical drawing	9
8	Spare parts	10

Central zero gas supply, designed as 19" module for application in

- **Immission Measuring Stations, mobile and stationary**
- **Testing Laboratories**
- **Analyzing Laboratories**

General view**Top view**

1 Functional principal

An oil-free compressor sucks in ambient air through a filter and compresses the air to a pressure of 7 bar. The air flows through a cooling coil and the condensate is disposed by a coalescence filter. The membrane dryer installed downstream brings the dew point down by 35 °K. An installed pressure vessels stores 7 l of air.

The output pressure of the zero air is adjustable by a pressure regulator between 1 and 4 bar.

Gaseous harmful substances are filtered by downstream fleece and Purafill- filters.

Maintenance cycle for the fleece depends on the environmental conditions on-site but lasts at least 4 month.

At the front panel two gauges show the pressure of the vessel and the output pressure.

2 Technical data:

Pressure unit:

- Oil-free, piston compressor
- Automatic dehumidifier
- Automatic Condensate Drain
- Output pressure 0 – 4 bar
- 7 l Container (for reducing operating hours)
- 19" Plug-in unit, 6 HU
- Power 230 V / 50 Hz
- Power consumption max. 435 W

Zero gas supply, max.: 20 l/min

Rel. Humidity at outlet: <5 %


Efficiency for SO₂: <1 ppb

Efficiency for NO/NO₂: <1 ppb


Efficiency for O₃: <1 ppb

Efficiency for CO: <10 ppb


3 Front view

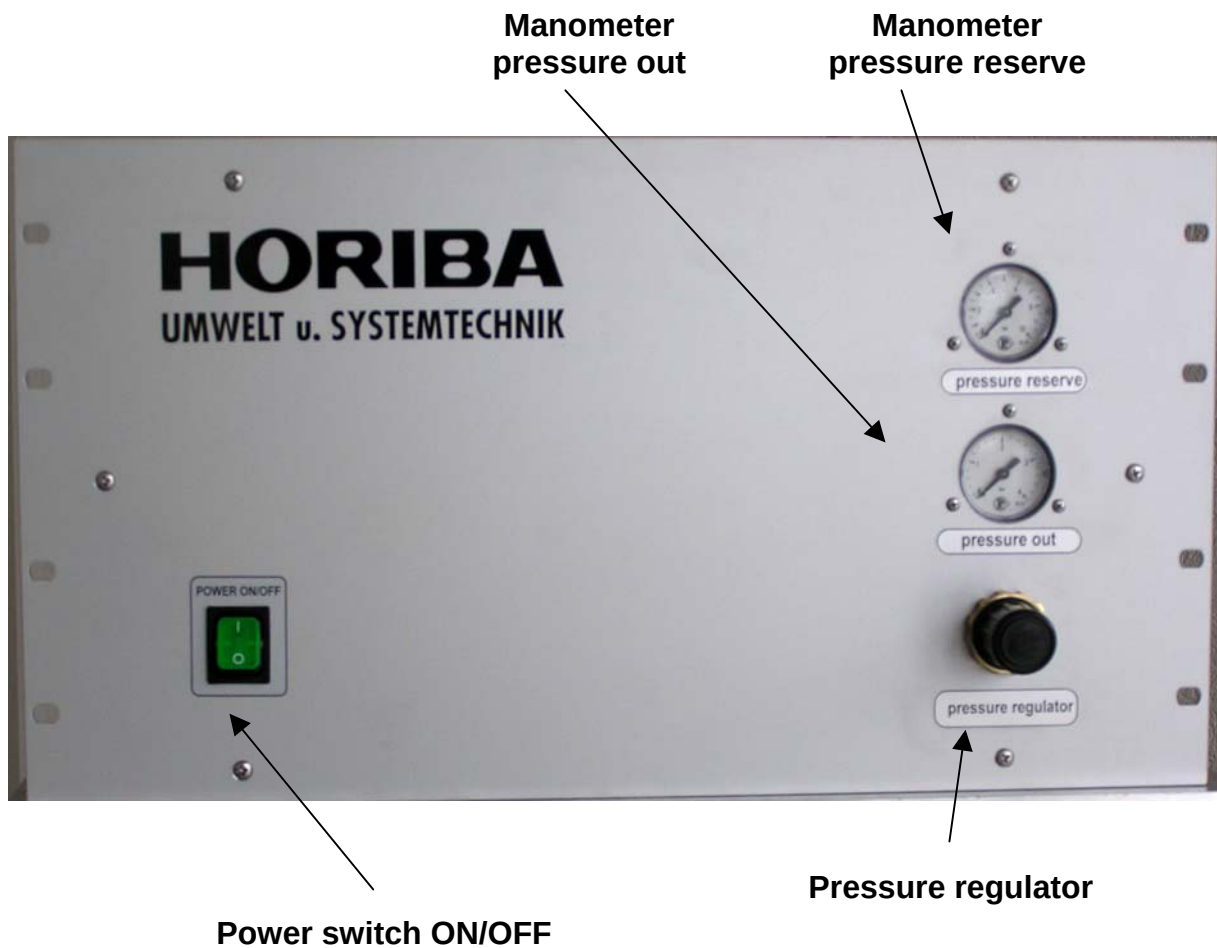


4 Rear view

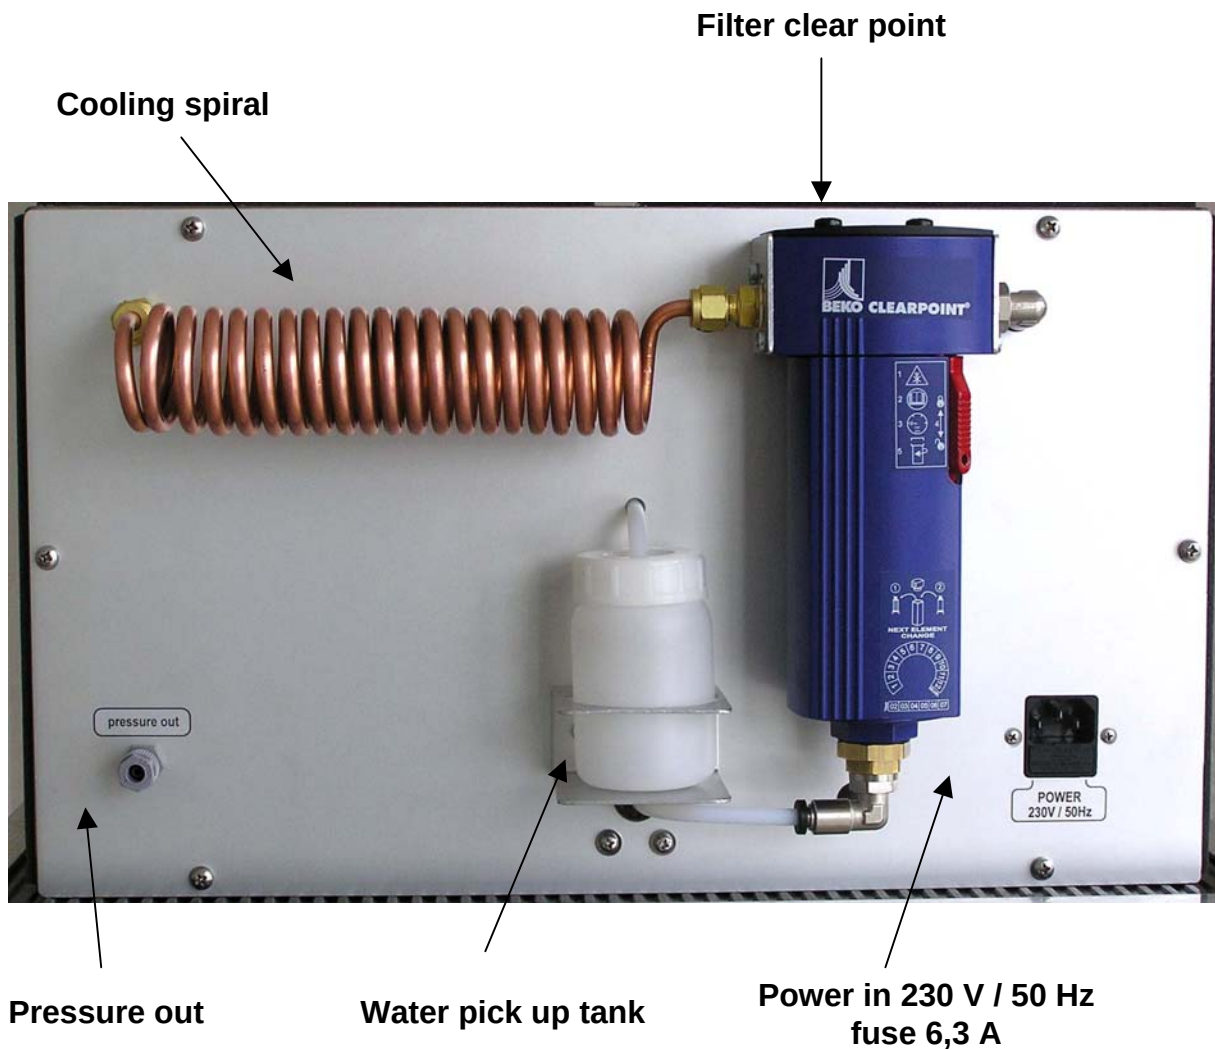

5 Internal view

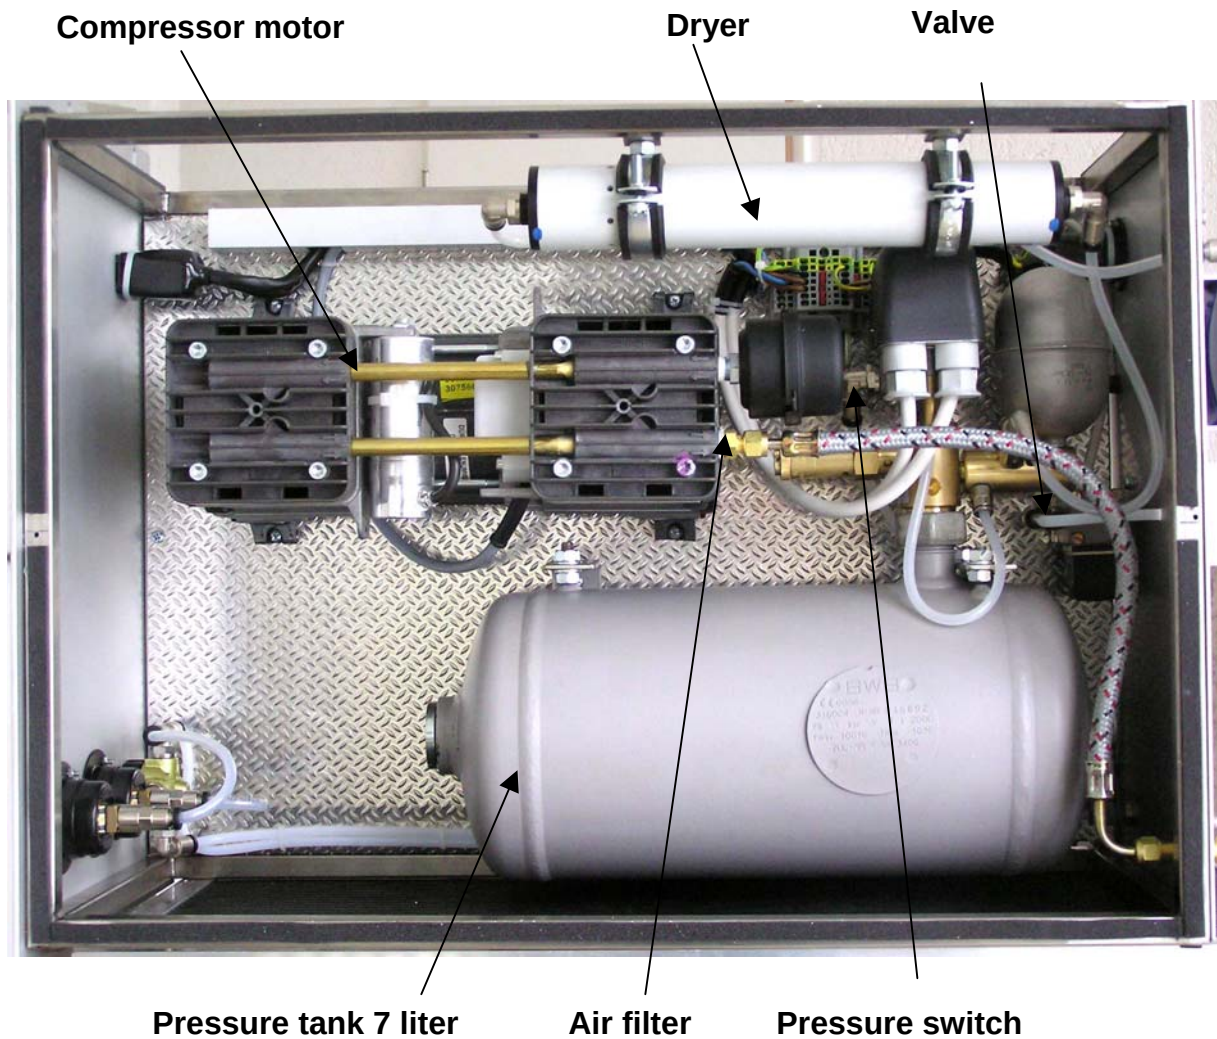


6 Flow schematic

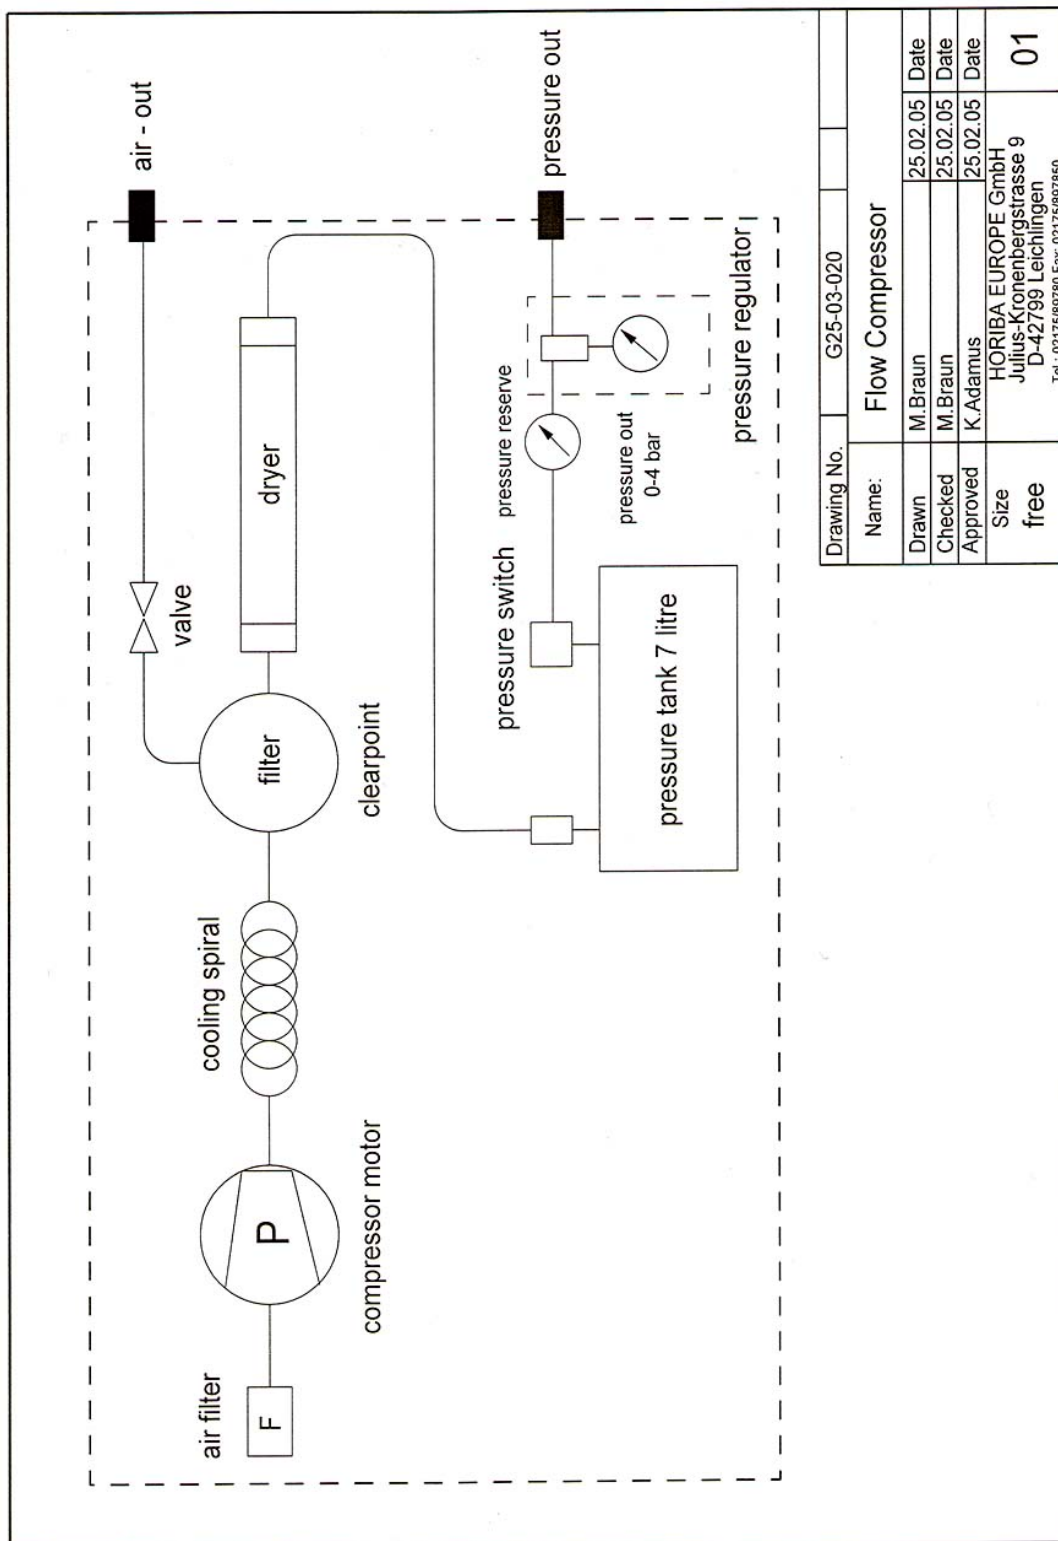

Date: 12/2006
Page: 9

7 Electrical drawing

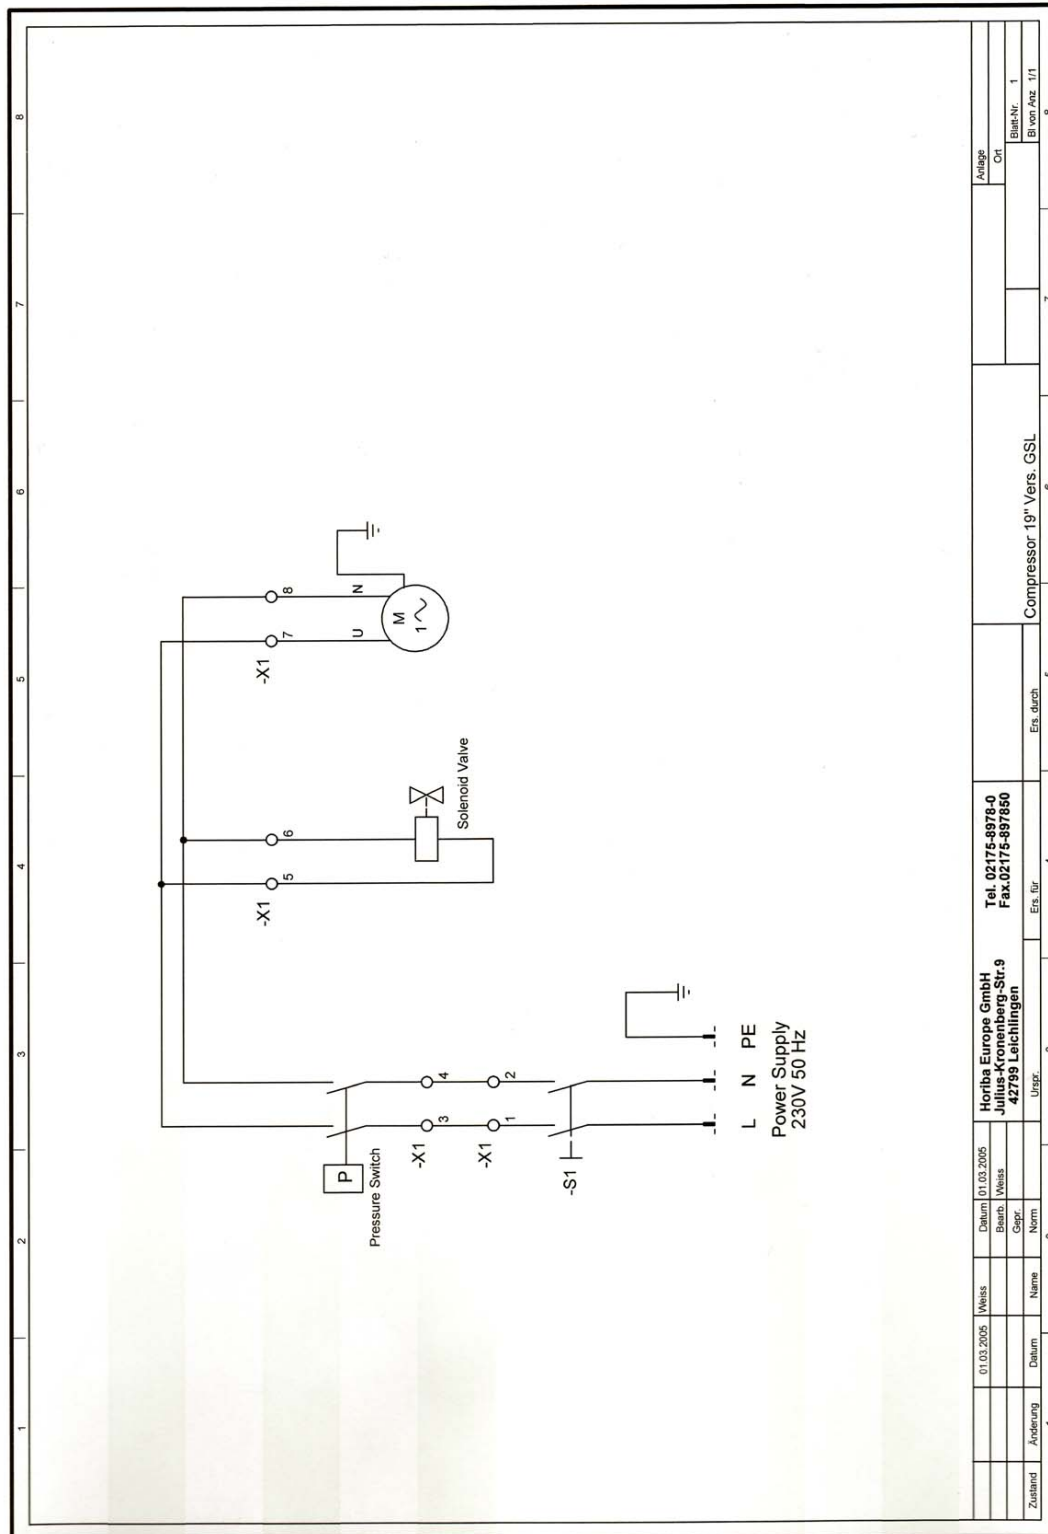

Date: 12/2006
Page: 10

8 Spare parts

No.	Name	Supplier	Part No.	pc.
1.	Pressure regulator G1/8 0,5-10 bar	HORIBA Europe	482.10 C	1
2.	Manometer pressure reserve 0 – 10 bar	HORIBA Europe		1
3.	Manometer pressure out 0 – 4 bar	HORIBA Europe		1
4.	Filter clear point	HORIBA Europe	S040SWC	1
5.	Dryer	HORIBA Europe	DM08G29RB	1
6.	Compressor motor rubber metal	HORIBA Europe	A-062/0834-23A 0832-008-00	1 1 set
7.	Air filter	HORIBA Europe	9000-416-30	1
8.	Pressure tank 7 liter	HORIBA Europe	0832-420-50	1
9.	Valve 230 V type 0211	HORIBA Europe	069017	1