


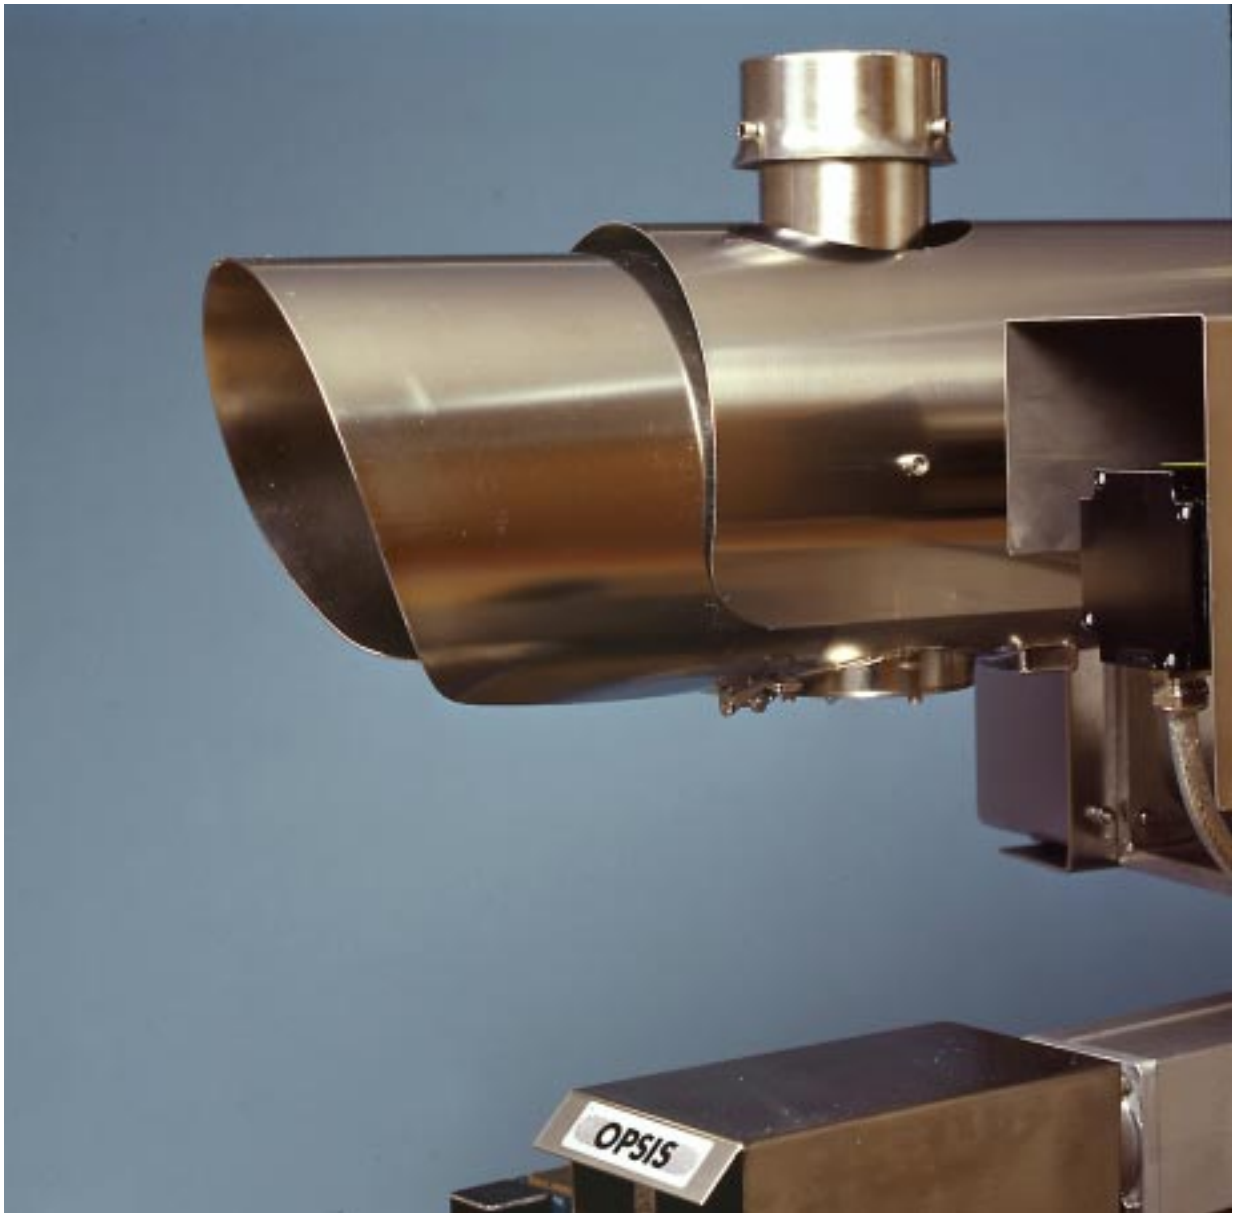

ER 130

Transceiver Unit for Air Quality Monitoring

The ER 130 combines the Opsis light emitter and receiver in a single, central unit, and creates an open lightpath with a remote retro-reflector (RR 090) which returns the light to the built-in receiver.

The ER 130 rotates and elevates under the control of system-controlled servo motors, allowing it to be programmed to operate with several reflectors, creating separate lightpaths. The retro-reflectors may be mounted on virtually any firm support. This allows great flex-

ibility in planning a monitoring system. The unit automatically optimizes light reception before taking each reading.

Optionally, the ER 130 can be installed to operate with remote Opsis light emitters (EM 110 or EM 150). In these applications it offers the economies of only requiring a single light receiver for several paths, and avoids the use of a multiplexer. Here, the ER 130 light emitter is used as a receiver only.

ER 130. Technical Specifications


Material • stainless steel
 Length • 1350 mm
 Height • 640 mm
 Weight (approx.) • 120 kg
 Window diameter • 150 mm
 Window material • quartz glass
 Angular rotation • $\pm 185^\circ$ (horizontal), $\pm 15^\circ$ (vertical)
 Max. delay time between two paths • 20 seconds
 Ambient temperature • -30°C to $+50^\circ\text{C}$ (-20°F to $+120^\circ\text{F}$)
 Degree of protection • IP 54
 Recommended monitoring path length • 75 to 250 metres (single path)

Retro-reflector RR 090 (separately ordered)

Material, housing • stainless steel
 Prisms • Suprasil quartz glass
 Number of prisms • 12
 Length, excl. attachment • 350 mm
 Diameter • 130 mm
 Weight (approx.) • 5.5 kg

Control unit

Dimensions (H×W×D) • 135×485×310 mm
 Weight (approx.) • 10 kg
 Ambient temperature • $+5^\circ\text{C}$ to $+30^\circ\text{C}$ ($+40^\circ\text{F}$ to $+85^\circ\text{F}$)

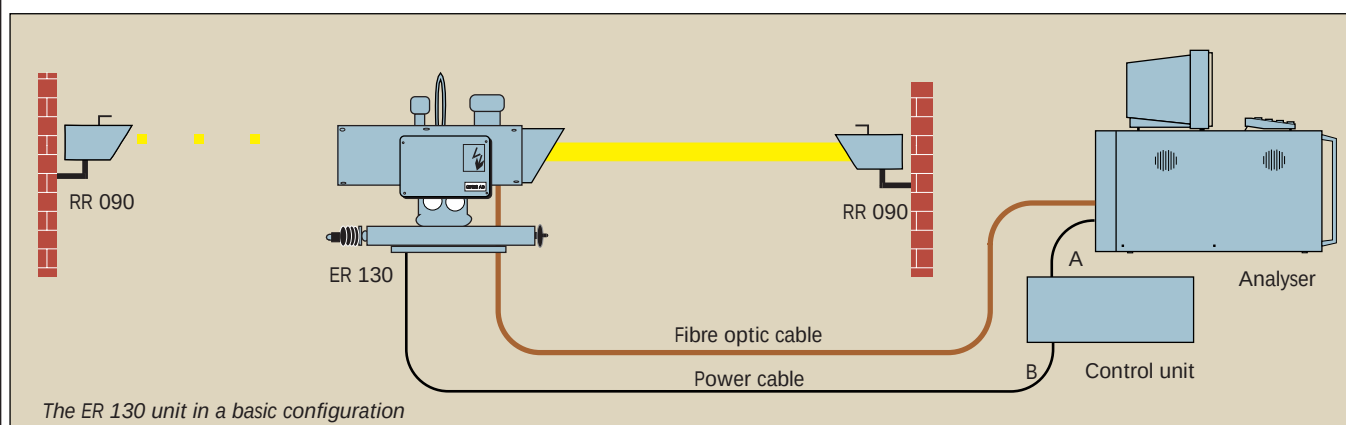

An ER 130 Unit includes

Transceiver
 Control unit (230 V~ (+6%, -10%)/115 V~ ($\pm 10\%$) 50/60 Hz)
 Xenon lamp 150 W, Type B
 Ignition unit
 Cable A length 2 metres
 Cable B length 5 metres

Standard equipment – separately ordered

Power supply unit PS 150
 Fibre optic cable OF 060
 Retro-reflector RR 090 with 12 prisms

Options

Xenon lamp 150 W, Type A
 Cable A length 10 metres (max.)
 Cable B length 25 metres (max.)
 Retro-reflector RR 090 with 7 prisms
 Receiver RE 130 (ER 130 without xenon lamp and lamp mirror). Requires separate lightsources

Accessories

Mirror heater HM 150
 Heated front cone HF 150
 Ventilation fan VF 020
 UV filters 220 series
 Calibration equipment

Specifications subject to change without notice

1994 06

Opsis AB

Box 244
 SE-244 02 Furulund, Sweden
 Telephone Int +46 46 72 25 00
 Telefax Int +46 46 72 25 01
 E-mail info@opsis.se
 URL <http://www.opsis.se>