= GP0 at the native-USB end: 2.54 mm pitch, 17.78 mm row spacing.

1) -> CH343P RXD (pin 5); CH343P TXD (pin 4) -> GP1 (RX, pin 2).


P13 (pin 17) = D-, 22 ohm series: HOST port (CC 56k Rp, VBUS from NATIVE USB).


SB: RP2350 USB_DP/USB_DM, 27 ohm series, USBLC6 ESD.


e-ORed to VSYS; AP2112K-3.3 makes 3V3. PIO VBUS is an output from NATIVE VBUS.


--1k--> button --> GND. RUN: RUN --1k--> button --> GND.







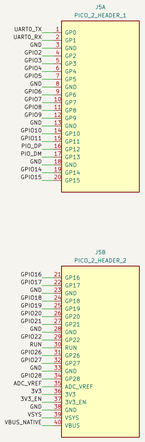






















BOOT and RUN buttons, 3.3 V LDO, RP2350 internal 1.1 V regulator
Native USB + CH343P UART0 + PIO USB on GP12/GP13
57.6 x 31.4 mm, Pico-compatible 2x20 header, 3x USB Type-C

Sheet: /
File: pico2-compat.kicad_sch

Title: Pico 2 compatible RP2350A board

Size: A1	Date:	**Rev: A**
KiCad E.D.A. 10.0.8		Id: 1/1