

ORION 4 +

RECESSED LED SPOT



ORION 4 +

RECESSED LED SPOT



CHARACTERISTICS

The ORION 4 PLUS has the same specifications as the ORION 4 but is even more versatile thanks to its support ring, which allows for the addition of filters and accessories. Incorporating the latest high-performance LED technologies, this completely recyclable spotlight uses low-voltage power, consumes very little energy, and produces no UV rays and very little heat. It has a 360° rotation system and a 30° pivoting angle and can be used with a large number of accessories, filters, lenses, or a second optional optic, making it perfectly adaptable to every lighting need.

APPLICATIONS



ELECTRICAL

INPUT

15V: 5.5W.

REMOTE POWER SUPPLY

15V: Eclipse PSB-15-60.

DIMMING POWER SUPPLY

15V: Eclipse LM-15-60.

WIRING

18" length - 20 AWG wire lead with WAGO quick connector.

THERMAL CONTROL

Through constant thermal monitoring and current control, Eclipse intelligent board technology (IBT) maintains optimal light levels and operating temperature preventing harmful overheating by self adjusting to its environment.

PHYSICAL

LIGHT ENGINE

High precision machined aluminum construction including an integrated heatsink.

ADJUSTMENT

Omnidirectional (360°) and 30° pivoting angle.

FINISH

Brushed aluminum. *

SOURCE AND OPTICS

LIGHT SOURCE

4 1.2W LEDs.

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K. *


OPTICS

10°, 23°, 46°.

ORION 4 +

RECESSED LED SPOT


DIMENSIONS

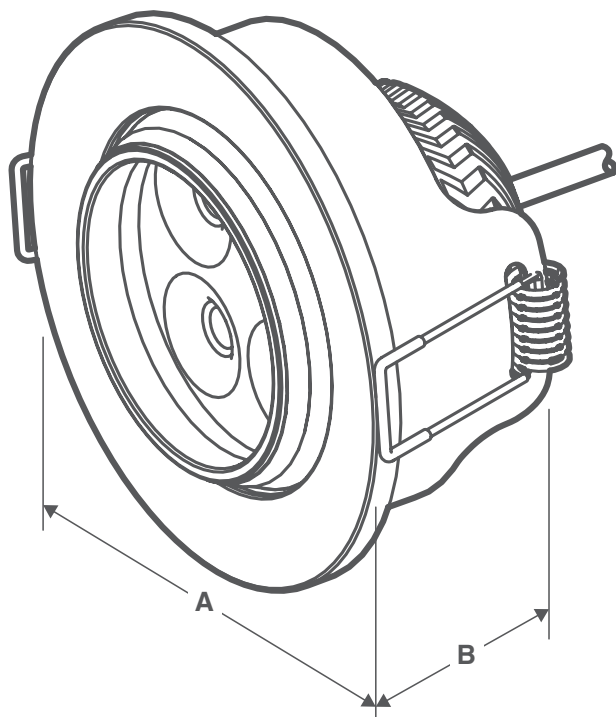

A = D 3.25 in (82.55 mm)
B = 2 in (50.80 mm)


EASY INSTALLATION

The ORION 4 PLUS is equipped with retaining spring clips holding it into position once inserted into the installation hole.




ADJUSTMENT

The ORION 4 PLUS has two adjustments that can be combined: a full 360° rotation and a 30° pivot angle.



ACCESSORIES

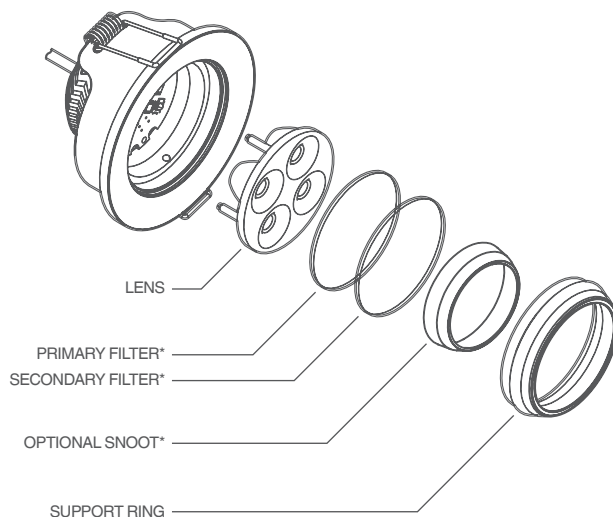

* Accessories are sold separately and field changeable.

ORION 4 +

RECESSED LED SPOT

ORDERING CODE MODEL

ANATOMY OF AN EKLIPSE ORDERING CODE:							
MODEL	VOLTAGE	WATTAGE	OPTICS	FILTER	ACCESSORIES	COLOR	FINISH
O4+	15V	5.5W	46	2F	SN	35K	BA
O4+ = ORION 4 +	15V = 15 volts	5.5W = 5.5 watts	10 = 10° 23 = 23° 46 = 46°	1F = Single filter 2F = Double filter NR = Not required	SN = Snoot NR = Not required	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K CUS = Custom	BA = Brushed aluminium CUS = Custom
Final Eclipse ordering code: O4+ - 15V - 5.5W - 46 - 2F - SN - 35K - BA							

INSTALLATION NOTES



WARRANTY

Five (5) years on parts.

APPROVAL

Approved CSA/UL and CE.



EKLIPSE
ARCHITECTURAL LIGHTING

2090 rue Moreau, Suite 100
Montréal, Qc, H1W 2M3
t. 514.590.0099 | f. 514.590.0098
e. sales@eklipseighting.com
w. www.EclipseLighting.com

SPECIFICATIONS MAY VARY, WITHOUT ALTERING OR REDUCING PRODUCT PERFORMANCE. ALL INFORMATION ON THIS DOCUMENT ARE THE SOLE PROPERTY OF EKLIPSE. REPRODUCTION OF THIS DOCUMENT, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION IS ILLEGAL.