
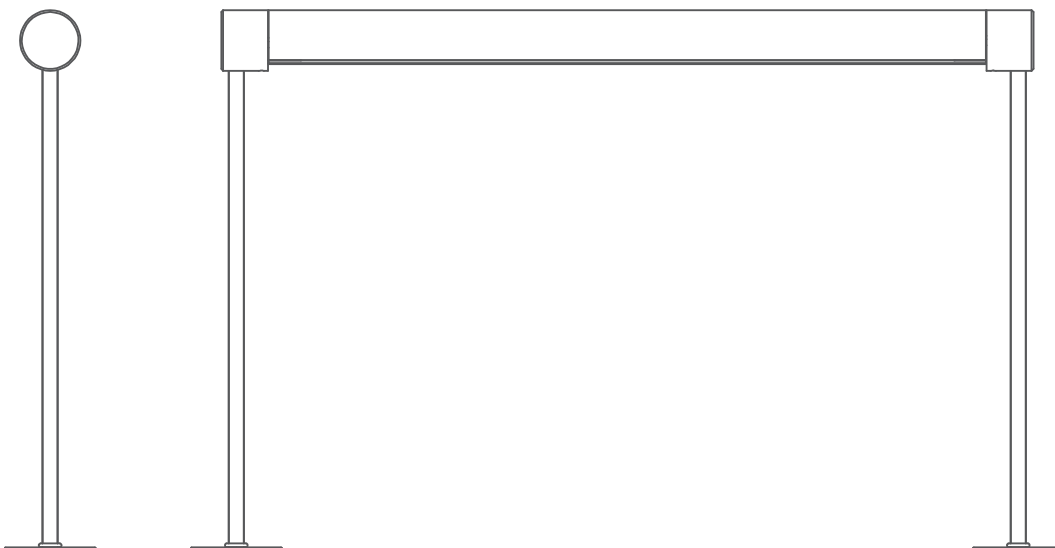


STREAMLINE™

LINEAR LED

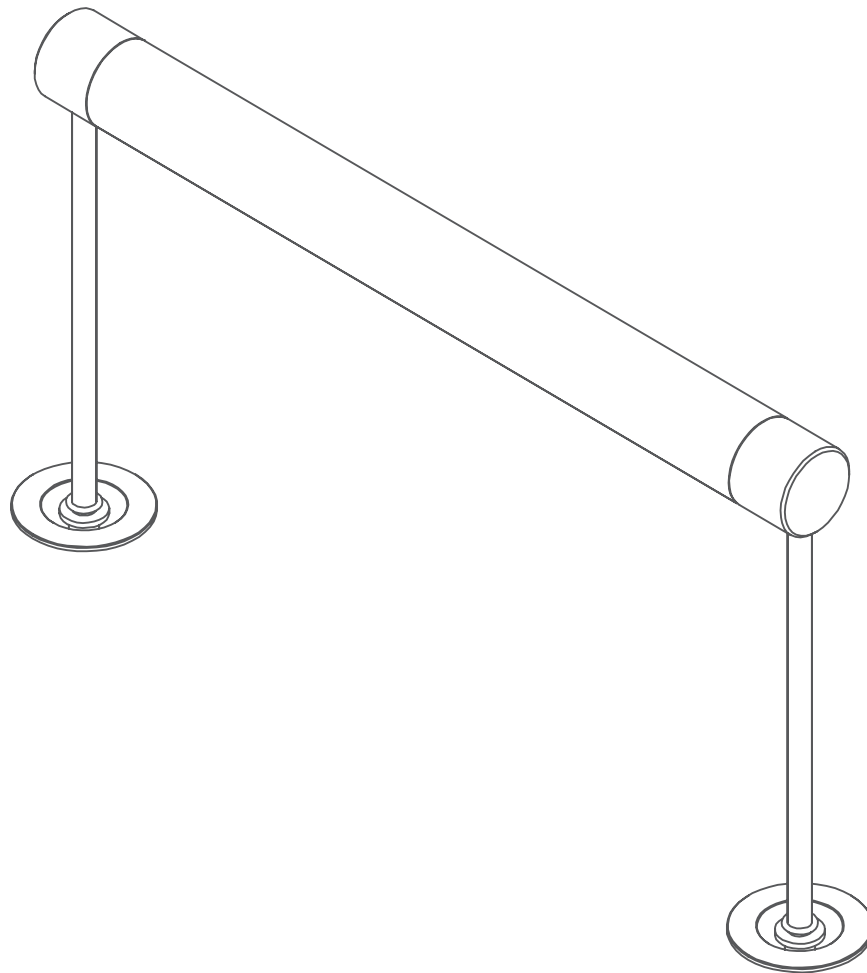

EKLIPSE
ARCHITECTURAL LIGHTING

2090 rue Moreau, Suite 100
Montréal, Qc, H1W 2M3
t. 514.590.0099 | f. 514.590.0098
e. sales@eklipseighting.com
w. www.EklipseLighting.com

SPECIFICATIONS MAY VARY, WITHOUT ALTERING OR REDUCING PRODUCT PERFORMANCE. ALL INFORMATION ON THIS DOCUMENT ARE THE SOLE PROPERTY OF EKLIPSE. REPRODUCTION OF THIS DOCUMENT, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION IS ILLEGAL.// LES SPÉCIFICATIONS PEUVENT DIFFÉRER SANS PRÉAVIS SANS RÉDUIRE LA PERFORMANCE DU PRODUIT. LES INFORMATIONS CONTENUES DANS CE DOCUMENT SONT LA PROPRIÉTÉ DE EKLIPSE. TOUTE REPRODUCTION PARTIELLE OU TOTALE SANS L'AUTORISATION ÉCRITE EST INTERDITE.


STREAMLINE™

LINEAR LED

INCLUDED IN THE BOX



SYSTEM & RODS
Quantity: 1




1/16" ALLEN KEY
Quantity: 1

EXAMPLES OF HOLE POSITION AND REMOTE DRIVER SETUP


6 FEET STREAM LINE



16 FEET STREAM LINE

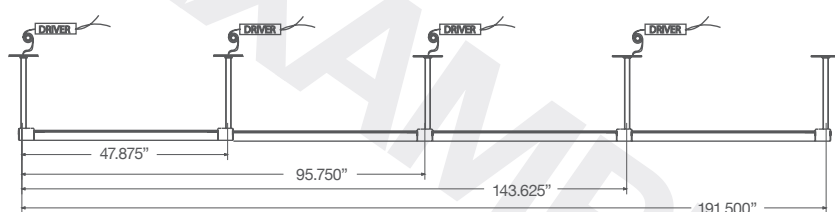


19 FEET, STREAM LINE

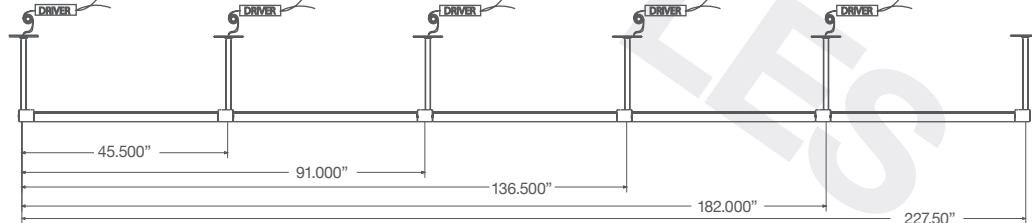

STREAMLINE™


LINEAR LED

PREPARATION

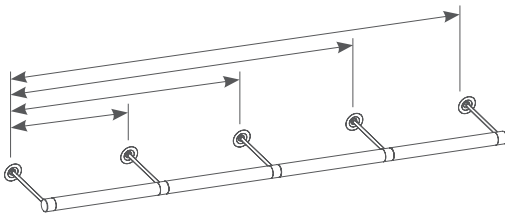

SOURCE POINT DIMENSIONING

Always start from a source point when taking dimensions for drilling the installation holes.

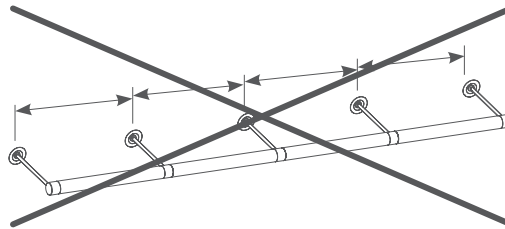

NEVER ACCUMULATE DIMENSIONS

Accumulating dimensions multiplies the slightest measuring mistakes.


HOLE DIAMETER



Using a power tool & hole saw, drill a D1.375" (35mm) hole for the wall anchor, according to the left-end side dimensions.

**USE ONLY A HOLE SAW
FOR DRILLING HOLE
D1.375" (D1 3/8")**


INSTALLATION



End cap

STEP 1


Insert the end caps with rods at the end of the fixture.



Join cap


STEP 2

If applicable (middle section), insert the joining caps with rods to the end of the fixture.




STEP 3

Position the light beam & lock the assembly by screwing the end cap / joining cap to the fixture's rod with Allen Key.




STEP 4

With the power off, wire the fixture to the wall wires using the included connectors.



STEP 5

Insert the anchor in the pre-drilled hole. Tighten the assembly with the anchor screws.



STEP 6

To adjust the fixture, slightly unscrew the end cap / join cap with the Allen Key and pivot the extrusion.