


Specifications sheet

MILI[®]

Micro linear luminaire



EKLIPSE[™]
ARCHITECTURAL LIGHTING

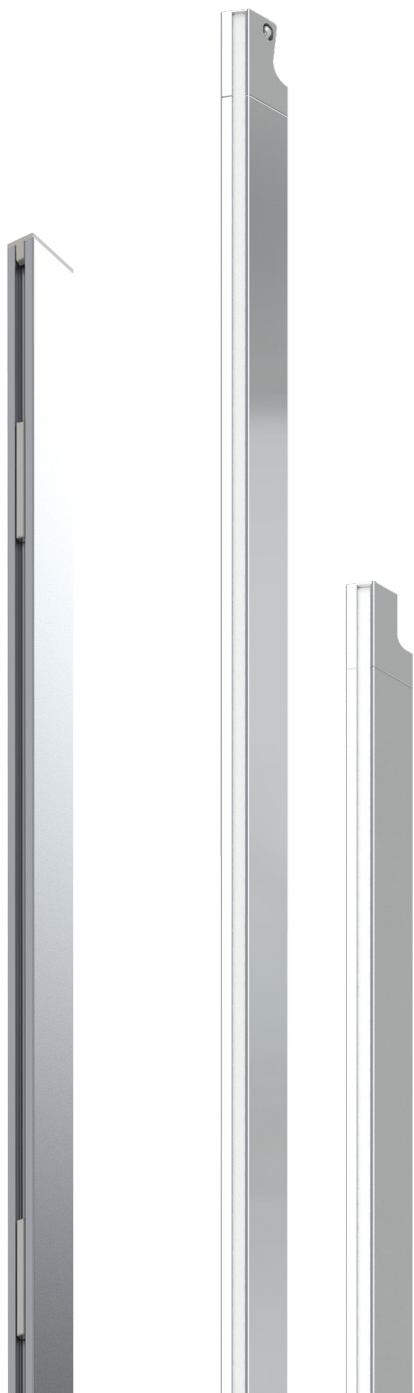

With its design process we proudly removed all the unnecessary physic material to leave only light.

MILI® can be perfectly embedded in the retail furniture, such as display shelves, to be basically invisible to the observer. With its miniaturized dimensions and perfect light distribution, MILI® revolutionizes shelf illumination.

MILI® is held in place with magnets, even in its version for the LIFELINE® tracklight. In this case, all fixtures can be easily repositionned in the system when required.

Electrical

Input

4W/ft, 6W/ft.

Remote Power Supply

24V: Eklipse™ PSB-24-100.

Dimming Power Supply

24V: Eklipse™ LM-24-100.

Wiring

48" length (1.2 m) - 20 AWG wire lead with WAGO quick connector. *

Thermal control

Through constant thermal monitoring and current control, Eklipse™ intelligent board technology (IBT) maintains optimal light levels and operating temperature preventing harmful overheating by self adjusting to its environment.

Operating temperature

The temperature should be measured at 3 inches from the light source.



0° ~ 40°

Physical

Construction

High precision thin walled aluminium extrusion.

Adjustment

Magnetic insert allows a quick and easy installation.

Finish

Anodized clear.
Anodized black. *

Light

Light source

10°, 25° and 35° tilted light source.

Light temperature

2700K, 3000K, 3500K, 4000K. *

CRI

85 (typical).

Film

Integrated frosted film.

Interior / Dry location only



Mates with LIFELINE®



CLASS 2
PRODUCT


24V - 100W MAX

* Available for tailor-made application. Please contact your Eklipse™ representative for further informations.

Dimensions

X 0.182" (5 mm)
Y 0.500" (13 mm)
W 0.750" (19 mm)

Z 8" (203 mm), 10" (254 mm)
 (custom length above 10" available in 1" increments, up to 60").

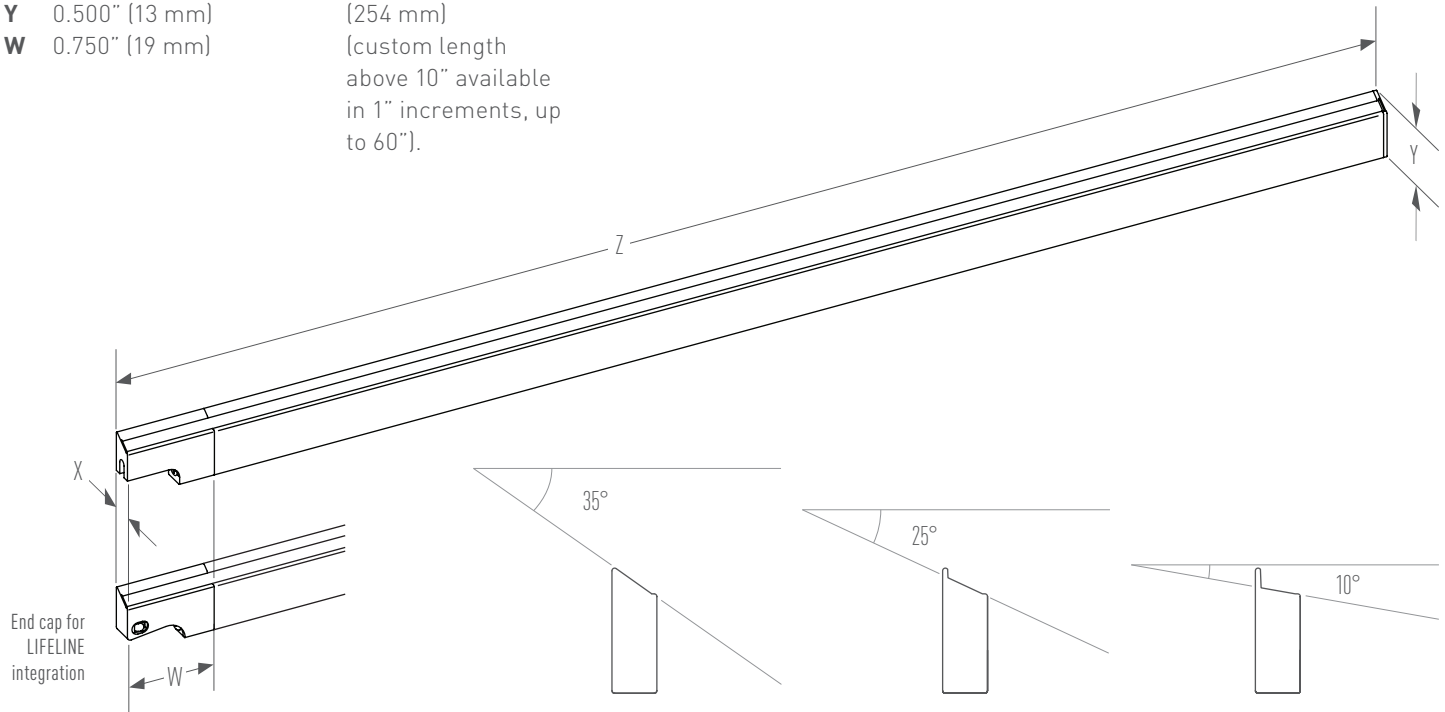



Light resolution

High density





Uniform light appearance.

Mounting options

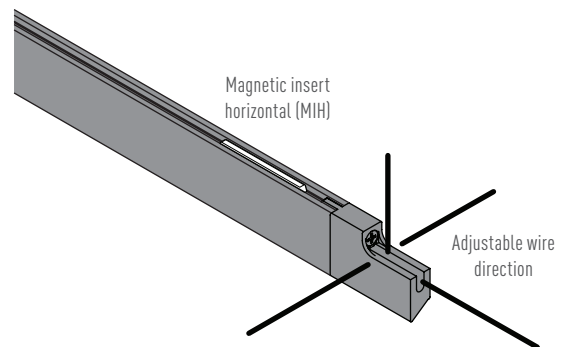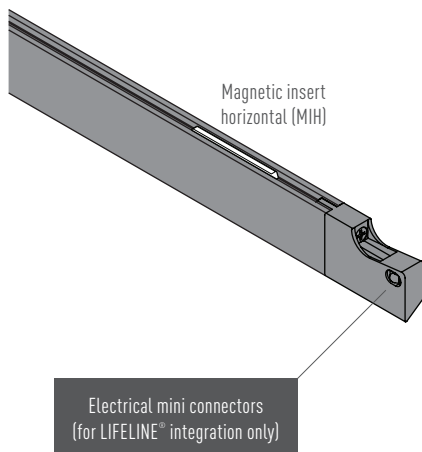

Design concept

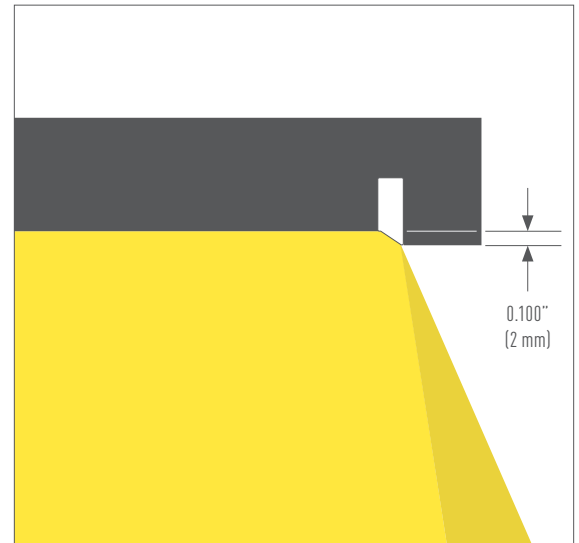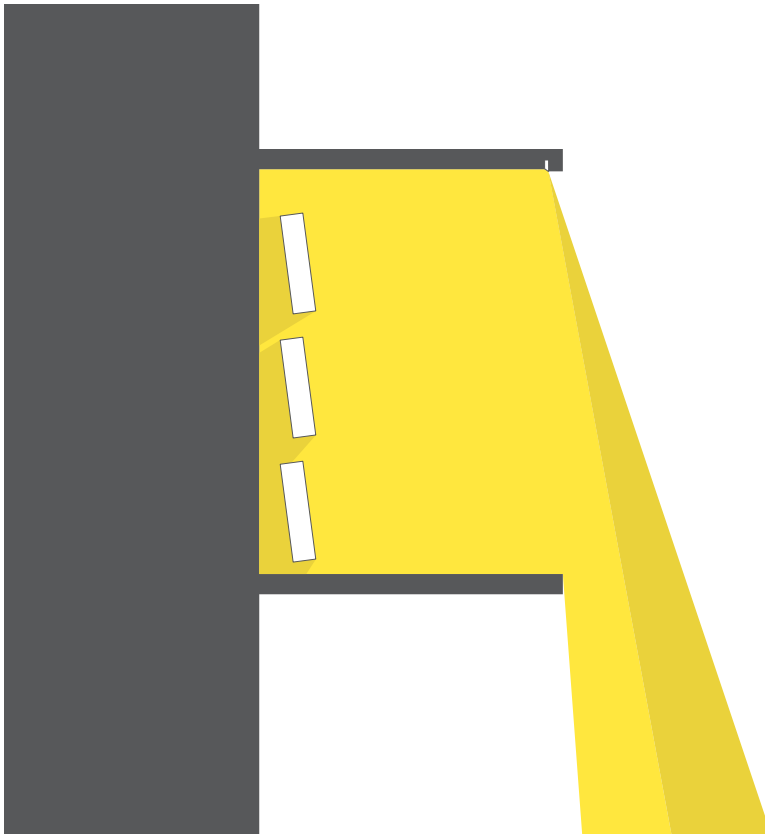

Optimized light distribution



MILI®, with its miniaturized dimensions is imperceptible once integrated in the shelf. It illuminates homogeneously the

display spaces to the very top, without projecting any shadow.

Integration

LIFELINE®


MILI® version for the LIFELINE® system holds in place with magnets.

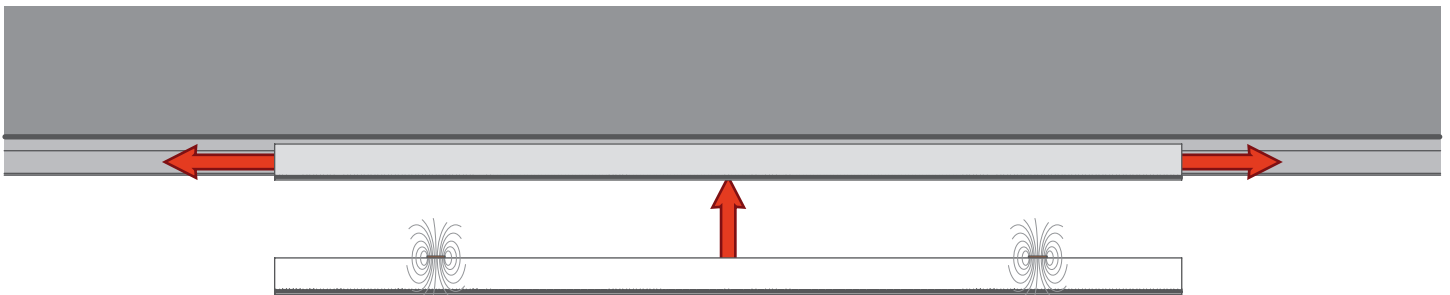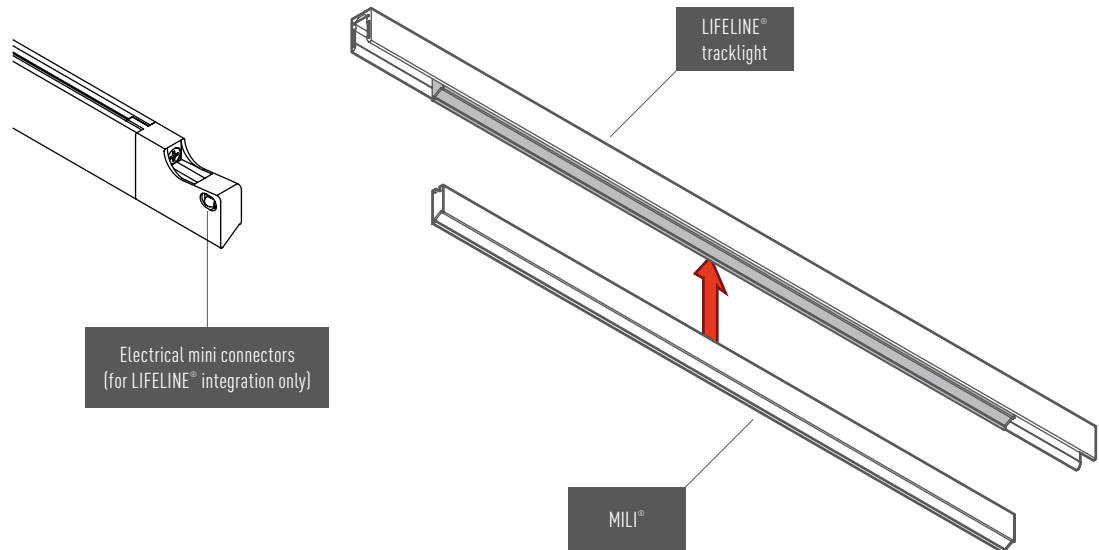

MILI® can be plugged and unplugged without turning off the electricity.

MILI® also slides freely along the LIFELINE® track.

Ordering code model

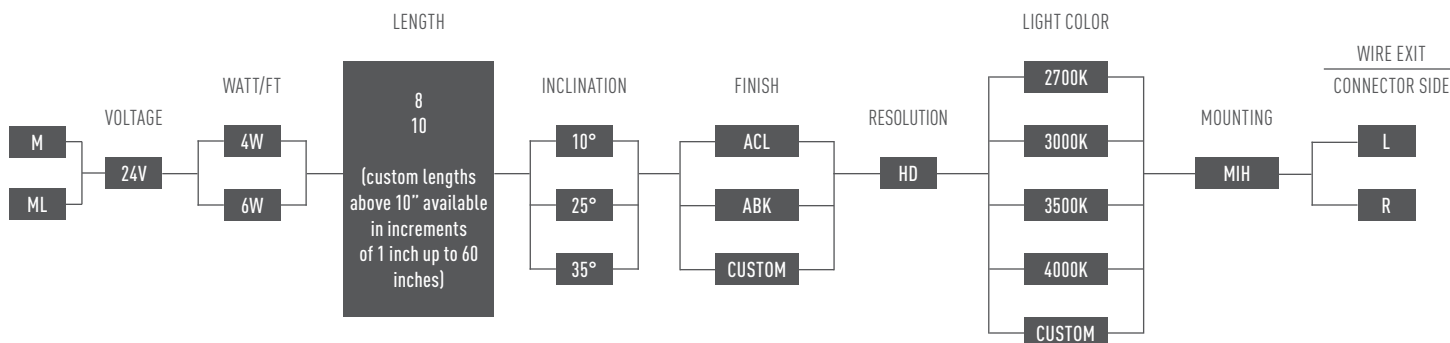

Installation Notes



Requires power tools and fastening hardware not included.



Risk of electric shock.

Warranty

Our products and relative parts are guaranteed for **five (5)** years.

See our terms and conditions on www.eklipselighting.com



EKLIPSE
ARCHITECTURAL LIGHTING™

2090 rue Moreau, Suite 100
H1W 2M3 Montréal QC
Canada

T +1 514 590 0099

F +1 514 590 0098

sales@eklipselighting.com

www.eklipselighting.com

EKLIPSETM

ARCHITECTURAL LIGHTING

2090 rue Moreau, Suite 100
H1W 2M3 Montréal QC - Canada
T +1 514 590 0099 / **F** +1 514 590 0098
sales@eklipselighting.com

www eklipselighting.com

Specifications may vary, without altering or reducing product performance. All information on this document are the sole property of EclipseTM Architectural Lighting

inc. Reproduction of this document, in whole or in part, without written permission is illegal.