

# Electrification of Residential Buildings

A professional engineering handbook on internal wiring design, residential electrical safety, wiring systems, wiring accessories, cable selection, illumination design, sub-circuit design, earthing, product certification, star labelling and estimation of residential electrification works.

## What this subject is

This course teaches how to design and estimate electrical installation for a residential building. It connects safety, wiring systems, MCB/RCCB/ELCB protection, cable selection, lighting calculations, sub-circuit planning, earthing, material schedule and cost estimation into one practical workflow.

**Malayalam:** Residential wiring design സ്വിച്ച്/സോക്കറ്റ് പ്ലേസ് സ്ലൈഡ് സ്വിച്ച് സ്ലൈഡ് സ്വിച്ച്. Load calculation, cable size, protection device, earthing, lighting level, material estimate, safety rules സ്ലൈഡ് സ്വിച്ച് സ്ലൈഡ് സ്വിച്ച് safe installation സ്ലൈഡ്.

## Official syllabus information

| Item          | Value                                                                    |
|---------------|--------------------------------------------------------------------------|
| Program       | Diploma in Electrical and Electronics Engineering                        |
| Course code   | 6032C                                                                    |
| Course title  | Electrification of Residential Buildings                                 |
| Semester      | 6                                                                        |
| Credits       | 4                                                                        |
| Category      | Program Elective                                                         |
| Periods       | 4 per week (L:3 T:1 P:0); 60 per semester                                |
| CO-PO Mapping | CO1 and CO2 moderately mapped to PO1; CO3 and CO4 strongly mapped to PO1 |

## Course objectives

- Design internal wiring of residential buildings.
- Draw wiring and schematic diagrams.
- Recognize the importance of safety and protection devices.

## Prerequisite

Power and Energy from Fundamentals of Electrical & Electronics Engineering, Semester 2.

## Course outcomes

- CO1: Outline specifications and uses of components for residential electrification.
- CO2: Choose lighting scheme and calculate lighting points.
- CO3: Identify estimate for suitable earthing as per IS standards.
- CO4: Prepare schedule of materials and estimate for residential electrification.

## Redesigned syllabus roadmap

The official module outcomes converted into a real residential wiring workflow.

Module 1 • CO1 • 14 Hours

### Safety, Wiring Systems and Residential Wiring Components

Electric shock precautions, wiring rules, conduit wiring, accessories, internal power distribution, protective devices and cable selection.

#### Electric shock and safety

Electric shock occurs when current passes through the human body. Severity depends on current magnitude, path through body, duration of contact, body resistance and supply condition.

Residential wiring design must reduce the chance of direct contact, indirect contact, leakage current and fire.

**Malayalam:** Shock ശരീരം വഴി കറന്റ് കയ്യടക്കം. RCCB/ELCB, proper earthing, insulation, correct fuse/MCB ഉപയോഗിച്ച് സുരക്ഷ-പ്രദമായ വയറിംഗ്.


**Accident rule:** Switch off supply first. Do not touch the victim directly while connected to live supply. Use insulated material, call medical help and apply first aid/CPR only if trained.

#### Wiring systems and conduit wiring

Wiring system is the method used to route conductors safely from the distribution board to points. Residential installations commonly use conduit wiring because it gives mechanical protection, neat appearance and safer routing. Conduit may be concealed or surface mounted depending on building stage and maintenance requirement.

- Purpose: distribute power safely to lighting, fan, socket and power points.
- Good practice: avoid loose joints, overloading, sharp bends and mixed unsafe routing.
- Maintenance point: keep circuit identification and labelling clear.

Residential distribution concept

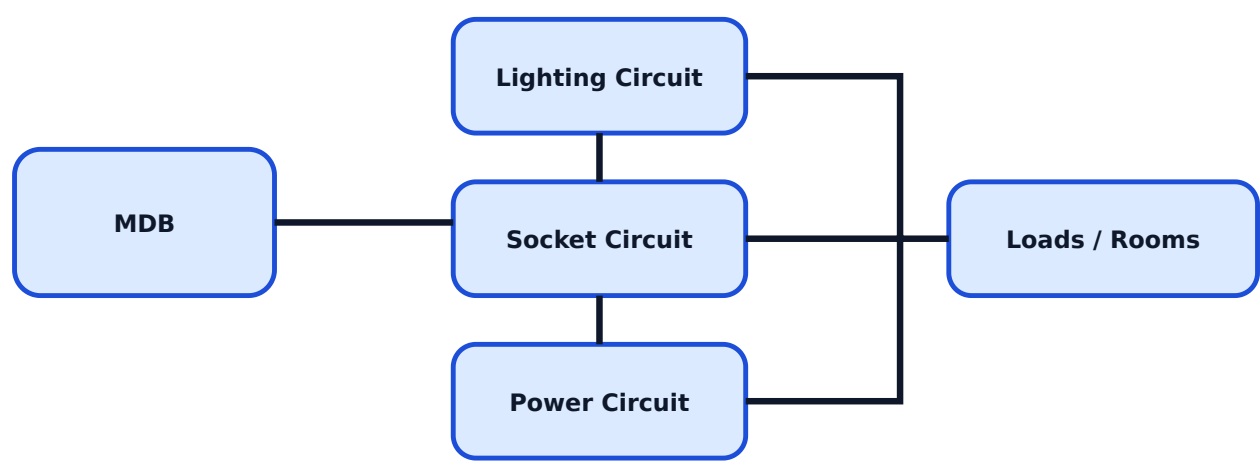

Wiring materials and accessories

Essential components include cables, switches, socket outlets, ceiling roses, lamp holders, fuses, switch fuse units, main switches, circuit breakers, junction boxes, conduits and main distribution board. Each item is selected by voltage, current rating, insulation, enclosure, mechanical strength, certification and installation location.

| Component     | Use                               | Selection point                               |
|---------------|-----------------------------------|-----------------------------------------------|
| MCB           | Overload/short-circuit protection | Current rating and breaking capacity          |
| RCCB/ELCB     | Earth leakage protection          | Sensitivity, poles and rating                 |
| Socket outlet | Portable appliance connection     | Ampere rating and earthing                    |
| MDB           | Main internal distribution point  | Number of circuits, protection and spare ways |

Cable selection criteria

For internal wiring, cable selection depends on connected load, current carrying capacity, voltage drop, installation method, ambient temperature, grouping, insulation type, mechanical protection,

earth continuity and protective device rating. Wrong cable selection causes overheating, nuisance tripping, voltage drop and fire risk.

### Expected questions

- 1. Explain electric shock, effects and safety precautions.
- 2. Explain conduit wiring with advantages and uses.
- 3. List specifications and uses of wiring accessories.
- 4. Explain MCB, MCCB, RCCB and ELCB.
- 5. Explain criteria for selecting cables for internal wiring.

Module 2 • CO2 • 15 Hours

## Residential Lighting Scheme and Lighting Point Calculation

Illumination terms, illumination levels, lamps, lighting systems and watts per square metre method.

### Important illumination terms

Illumination design ensures required light level for each room. Important terms are luminous flux, illumination, luminous efficiency, coefficient of utilization and maintenance factor. Laws of illumination explain how light intensity varies with distance and angle.

**Malayalam:** Lighting design- room area, required brightness, lamp wattage/lumen output, wall/ceiling reflection, maintenance dirt factor  $\frac{1}{2}$   $\frac{1}{3}$   $\frac{1}{4}$   $\frac{1}{5}$   $\frac{1}{6}$   $\frac{1}{7}$   $\frac{1}{8}$   $\frac{1}{9}$   $\frac{1}{10}$ . Guess  $\frac{1}{2}$   $\frac{1}{3}$   $\frac{1}{4}$   $\frac{1}{5}$   $\frac{1}{6}$   $\frac{1}{7}$   $\frac{1}{8}$   $\frac{1}{9}$   $\frac{1}{10}$ .


| Term                       | Meaning                                      |
|----------------------------|----------------------------------------------|
| Luminous flux              | Total visible light output of source         |
| Illumination               | Light falling on unit area                   |
| Luminous efficiency        | Light output per watt of electrical input    |
| Coefficient of utilization | Fraction of lamp flux reaching working plane |

### Electric lamps comparison

Residential lighting may use LED lamps, fluorescent tubes or incandescent lamps. LEDs are preferred because of higher efficiency, long life and lower heat. The syllabus expects comparison based on lumen per watt, life span and colour rendering index.

| Lamp             | Efficiency     | Life     | Comment                        |
|------------------|----------------|----------|--------------------------------|
| LED              | High           | Long     | Best modern residential choice |
| Fluorescent tube | Medium to high | Moderate | Used in older installations    |
| Incandescent     | Low            | Short    | High heat and inefficient      |

## Lighting schemes

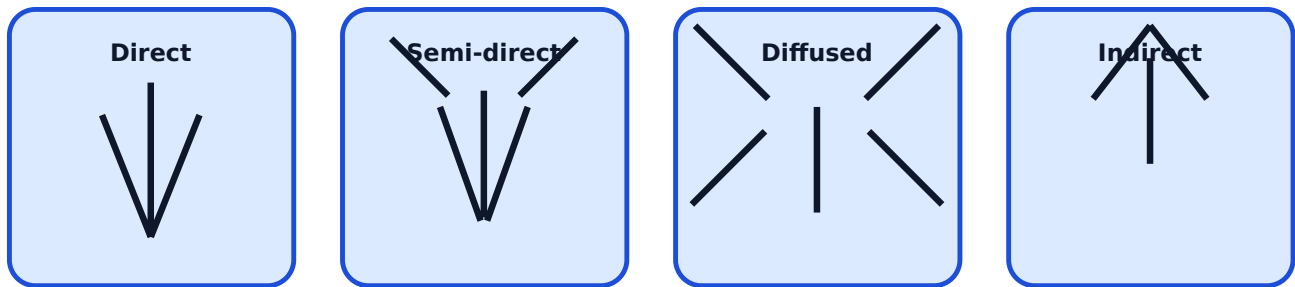

## Lighting point calculation

The syllabus specifies design of lighting schemes for residential buildings using the watts per square metre method. The method starts with room area and recommended lighting power density or chosen wattage, then calculates the number of lamps required and distributes them uniformly.

**Exam answer format:** Write room dimensions, area, selected lighting scheme, method, lamp wattage, calculated number of lamps and final practical layout.

## Direct and indirect lighting comparison

Direct lighting sends most light downward to the working plane and is efficient for task areas. Indirect lighting sends light to ceiling/walls first and gives soft glare-free illumination but requires more power and suitable reflective surfaces.

## Expected questions

1. Define luminous flux, illumination, luminous efficiency and coefficient of utilization.
2. Compare LED, fluorescent tube and incandescent lamps.
3. Classify lighting systems and draw diagrams.
4. Compare direct and indirect lighting.
5. Calculate number of lamps required for a residential room.

# Symbols, Sub-Circuits and Earthing Estimate

Indian standard wiring symbols, conductor colour scheme, labelling, sub-circuit design, cable size, protection device rating and pipe/plate earthing estimate.

## Standard symbols and labelling

Electrical drawings must use standard symbols for switches, lamps, fans, sockets, distribution boards, fuses and earthing. Consistent symbols make the layout understandable for electricians, inspectors and maintenance staff. Conductors should be colour identified and labelled clearly.


**Malayalam:** Drawing- symbol standard തിരഞ്ഞെടുക്കൽ site electrician- confusion തിരഞ്ഞെടുക്കൽ. Labeling തിരഞ്ഞെടുക്കൽ future maintenance- wrong circuit isolate തിരഞ്ഞെടുക്കൽ risk തിരഞ്ഞെടുക്കൽ.

## Sub-circuit design

A residential installation is divided into sub-circuits so that lighting, socket and power loads are protected and controlled properly. Sub-circuit design considers connected load, number of points, cable size and protective/control device rating.

| Step                     | Purpose                                                     |
|--------------------------|-------------------------------------------------------------|
| List loads               | Identify lights, fans, sockets and power appliances         |
| Calculate connected load | Estimate current and circuit grouping                       |
| Select cable             | Match load current, voltage drop and installation condition |
| Select protection        | Coordinate MCB/RCCB rating with cable and load              |

## Pipe earthing concept

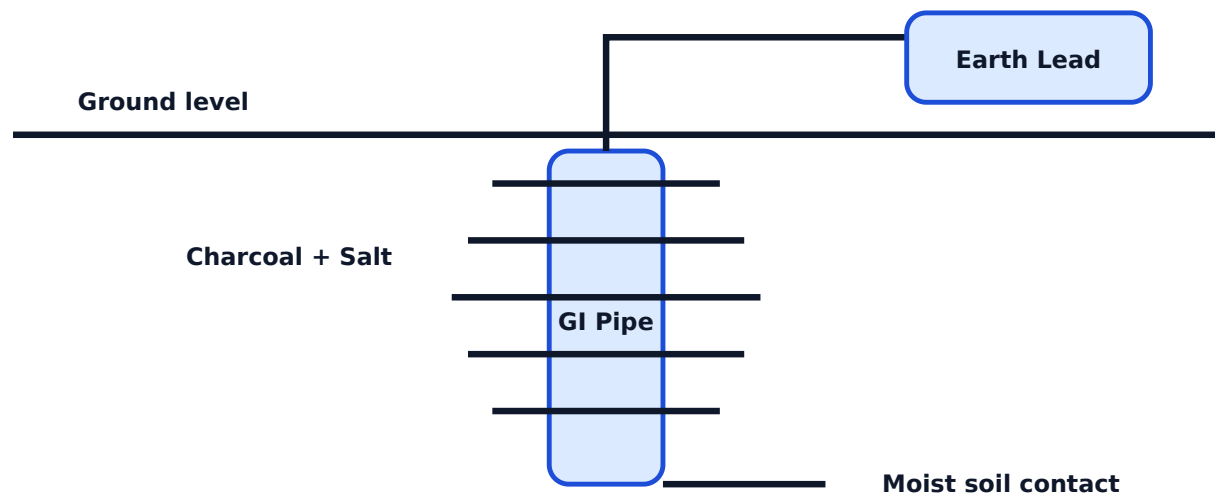

## Earthing purpose and types

Earthing provides a low resistance path for fault current and keeps exposed metal parts near earth potential. It improves shock protection and helps protective devices operate during faults. The syllabus includes classification of earthing, earth continuity conductor, electrode, earthing lead and installation procedure.

**Safety note:** Earthing is not decoration. Poor earthing can make metal appliances dangerous during insulation failure.

## Pipe and plate earthing estimate

For estimation, list electrode, earth lead, earth continuity conductor, chamber, cover, charcoal/salt or backfill material where used, watering arrangement, clamps, labour and testing. Use current IS/local authority requirements for sizes and installation details.

## Expected questions

1. Draw standard symbols for wiring accessories.
2. Explain colour scheme and labelling methodology.
3. Design sub-circuits for a residential building.
4. Explain purpose and installation of earthing.
5. Prepare estimate for standard pipe and plate earthing.

Module 4 • C04 • 14 Hours

# Schedule of Materials and Residential Electrification Estimate

Estimate format, cost factors, certifications, star labelling and preparation of layout, wiring diagram and estimate for residential buildings.

## Estimation basics

Electrical estimation is the process of preparing quantity and cost of all materials and labour required for an installation. The standard format should include item description, specification, unit, quantity, rate, amount, labour cost, tax, contingency and validity period.

**Malayalam:** Estimate-എന്നത് വസ്തുവിന്റെ പേര്, സ്പെസിഫിക്കേഷൻ, ക്വണ്ടിറ്റി, റേറ്റ്, ലാബർ, ടാക്സ്, കണ്ടിജൻസി, വാലിഡിറ്റി എന്നിവ ഉൾപ്പെടെയാണ്. വൈദ്യുത പ്രവർത്തനം നടത്തുന്നതിന് വേണ്ടിയുള്ള വൈദ്യുത പ്രവർത്തനത്തിന്റെ ചെലവ് കണക്കാക്കുക.

## Factors affecting estimate

- Building location and site condition.
- Cost of items and market availability.
- Tax rate and transportation.
- Labour cost and installation difficulty.
- Contingency expenses.
- Validity period of rates.


## Product certification and star labelling

Electrical products should follow recognized certification and safety standards. The syllabus includes national and international certifications such as BIS, IEC, CE and UL. Star labelling helps compare domestic appliance energy performance and supports efficient selection.

| Certification | Meaning in purchase decision                  |
|---------------|-----------------------------------------------|
| BIS           | Indian standard conformity                    |
| IEC           | International electrotechnical standard basis |
| CE            | European conformity marking                   |
| UL            | Safety certification used in many products    |

## Estimate workflow



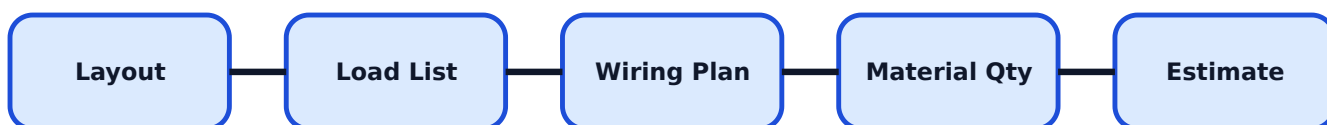

## Residential estimate contents

A complete estimate includes layout, wiring diagram, circuit schedule, cable length, conduit length, switches, sockets, DB, MCB/RCCB, earthing materials, accessories, labour and testing. Problems in this module should be answered in a neat tabular format with calculation notes.

## Expected questions

1. Explain standard estimate format and factors.
2. Interpret BIS, IEC, CE and UL certification.
3. Explain need and benefits of star labelling.
4. Prepare schedule of materials for a residential building.
5. Prepare estimate for electrification of a residential building.

## Formula / Rule Bank

Residential electrification formulas, estimate rules and safety design checks.

### Power

$P = V \times I \times \text{power factor}$  for single-phase AC load approximation.

### Current

$I = P / V$  for simple single-phase resistive load estimate.

### Energy

$\text{Energy (kWh)} = \text{Power (kW)} \times \text{Time (h)}$

### Illumination

$E = \text{luminous flux} / \text{area}$

### Number of lamps

Number of lamps = total required lighting watts / wattage of one lamp.

### Lighting power density

Lighting watts = floor area x watts per square metre value.

### Estimate amount

Amount = Quantity x Rate; Total = material + labour + tax + contingency.

### Protection rule

Protective device rating must protect the selected cable and suit the connected load.

## Solved Examples / Problem Lab

Step-by-step residential wiring, lighting and estimate calculations.

### Example 1 - Lighting point calculation

Given: Room area = 20 sq.m. Lighting design value = 8 W/sq.m. Lamp rating = 10 W LED.

Required lighting watts =  $20 \times 8 = 160$  W.

Number of lamps =  $160 / 10 = 16$  lamps.

**Provide 16 LED points or revise with higher wattage lamps and proper layout.**

### Example 2 - Connected load current

Given: Total lighting load = 1200 W, supply = 230 V.

Current =  $P/V = 1200/230$ .

**Current  $\approx 5.22$  A. Select cable and protection as per standards and installation condition.**

### Example 3 - Material amount

Cable quantity = 90 m. Rate = Rs.32/m.

Amount =  $90 \times 32$ .

**Cable amount = Rs.2880.**

### Example 4 - Energy cost

Load = 0.5 kW, use = 6 h/day, tariff = Rs.8/kWh.

Daily energy =  $0.5 \times 6 = 3$  kWh. Cost =  $3 \times 8$ .

**Daily cost = Rs.24.**

### Example 5 - Estimate total

Material = Rs.18000, labour = Rs.4500, contingency = Rs.1500.

Total before tax =  $18000 + 4500 + 1500$ .

**Total before tax = Rs.24000.**

## Practice Section and Expected Questions

Module-wise exam preparation for residential electrification.

### One-mark questions

1. What is RCCB?
2. Define illumination.
3. What is MDB?
4. Name two earthing types.
5. What is BIS certification?

### Short-answer questions

1. List electric shock precautions.
2. List wiring accessories used in residential buildings.
3. Compare LED and incandescent lamps.
4. List factors for cable selection.
5. List factors affecting estimate.

### Descriptive questions

1. Explain conduit wiring and general wiring practices in India.
2. Explain lighting schemes with diagrams.
3. Explain design of sub-circuits with connected load.
4. Explain pipe earthing and plate earthing estimate.
5. Prepare schedule of materials for residential electrification.

### MCQ practice

1. RCCB is mainly used for: A) Over-speed B) Earth leakage protection C) Illumination measurement D) Fan speed only
2. In series wiring of protective devices, the device must be selected according to: A) colour only B) load and cable rating C) room paint D) lamp brand
3. Star labelling helps compare: A) appliance energy performance B) wire colour C) conduit shape D) wall thickness

# Fresh Model Question Paper

Original model paper based on syllabus coverage; not copied from official question papers.

## Course 6032C - Electrification of Residential Buildings

**Time:** 3 Hours **Maximum Marks:** 100

### Part A - Short Answer

1. Define electric shock.
2. Name any two wiring accessories.
3. What is luminous flux?
4. What is earth continuity conductor?
5. Name any two product certifications.

### Part B - Medium Answer

1. Explain precautions against electric shock.
2. Explain conduit wiring with uses and specifications.
3. Compare LED, fluorescent tube and incandescent lamps.
4. Explain sub-circuit design in a residential building.
5. Explain star labelling and its benefits.

### Part C - Long Answer / Problems

1. Explain residential wiring components, MDB and protective devices.
2. Design lighting points for a 24 sq.m room using 8 W/sq.m method and 12 W LED lamps.
3. Explain pipe earthing and prepare an estimate format for standard pipe earthing.
4. Prepare schedule of materials for a small residential building wiring work.
5. Explain product certification, estimate factors and residential electrification estimate workflow.

## Complete Model Answers

Answer guide with formulas, diagram points and common mistakes.

### Electric shock answer

Electric shock is the physiological effect produced when electric current passes through the body. Severity depends on current, voltage, body resistance, path and time of contact.

### Lighting problem answer

Required lighting watts = area x watts per square metre =  $24 \times 8 = 192$  W. Number of 12 W lamps =  $192 / 12 = 16$ .

**Provide 16 LED lamps, then arrange points uniformly according to room layout.**

### Pipe earthing answer points

Draw earth electrode pipe, earth lead, clamp, watering arrangement, chamber, backfill and earth continuity conductor. Explain low resistance path for fault current and protective operation.

### **Estimate workflow answer**

Study plan, prepare load list, select wiring system, mark points, prepare wiring diagram, calculate cable/conduit/accessory quantities, add protection and earthing, prepare rate analysis, labour and final estimate.

### **Common mistakes**

Do not prepare estimate without specifications. Do not choose MCB rating without considering cable size and load. Do not ignore RCCB/ELCB and earthing in residential safety answers.

### **References from syllabus**

Raina & Bhattacharya, Allagappan & Ekambarram, S.L. Uppal, Surjit Singh, J.B. Gupta, BIS SP-30:2011, IS 732-1989, BIS, CPWD, CEI Kerala and KSEB resources.