

University of Waterloo  
Faculty of Engineering  
Department of Nanotechnology Engineering

# Design of Bluetooth Low Energy Controlled Model Rocket

Nordic Semiconductor ASA  
Otto Nielsens veg 12,  
7052 Trondheim

Prepared by Tong Wu  
ID 20470965  
User ID t53wu  
3B Nanotechnology Engineering  
October 10, 2016

Otto Nielsens veg 12,  
7052 Trondheim

October 10, 2016

Shirley Tang, Director  
Nanotechnology Engineering  
University of Waterloo  
200 University Ave. West  
Waterloo, ON  
N2L 3G1

Dear Dr. Tang:

This work report, titled Design of Bluetooth Low Energy Controlled Model Rocket, was written upon the completion of my 3B work term for Nordic Semiconductor ASA. This report is to be submitted for the fulfillment of WKRPT 400. The purpose of the report is to reflect on the engineering design process behind the model rocket demo project for the Applications Group and to pass on knowledge of model rocketry to the rest of the group so that the project can be further developed and improved upon if desired.

Nordic Semiconductor ASA is a Norwegian technology company that focuses on delivering the best ultra-low power wireless solutions and is currently a leader in the Bluetooth Low Energy market. The company's profit source is the selling of Bluetooth Low Energy chips, but it also has many teams that work on relevant hardware, software, and services which are provided to their customers or potential customers free of charge in order to help them easily integrate Nordic chips into their products and business. During my work term I worked in the Applications Group, led by Endre Rindalsholt, which is mainly responsible for creating reference designs and demo projects to showcase potential product concepts and a sample design for customers to reference their products off of.

I hereby confirm that I have received no assistance in writing this report. I also confirm this report has not been previously submitted for academic credit at this or any other academic institution.

Sincerely,

Tong Wu  
20470965

## Contributions

During my employment at the Applications Group, the team consisted of around 15 full-time employees and summer students working on embedded firmware, electrical hardware, and web applications for Bluetooth Low Energy devices. These projects were all aimed to help our customers have a easier time developing products with our chips and help them reach full volume production and go to market faster. It was a very energetic group with lots of exciting multidisciplinary hands-on projects.

My three projects at Nordic were sensor driver development, security enhanced Eddystone beacon firmware development in partnership with Google, and finally a Bluetooth Low Energy (BLE) enabled model rocket demo project. The project that will be reported on and discussed in detail in the report is the BLE enabled model rocket. The purpose of this project was to create a proof of concept (PoC) prototype of a model rocket that is running on Nordic's latest BLE system-on-chip (SoC), nRF52832, to showcase an application of BLE in medium-range toys because future BLE specifications are going to allow for higher transmit powers thus significantly increasing the previously limited range of BLE and making it a suitable technology for medium range applications. Moreover, this project was an opportunity for me to develop my skills in printed circuit board (PCB) layout and schematic design, antenna tuning, and mechanical design which were laid out as part of my learning outcomes in the beginning of the work term. The entire process involved internet research of the current model rocketry market, the existing types of model rockets and their associated flight dynamics and equipment requirements and instruments, as well as available purchasing locations for such resources; prototyping of a reliable engine ignition mechanic and parachute deployment mechanic; circuit design and PCB layout of the entire electronic system including the communication system, telemetry system, and ignition and recovery deployment system; design and prototype the mechanical assembly through 3D modeling and 3D printing, and finally validation and tuning of flight dynamics with model rocketry simulation software. This project was mainly a solo effort with input and constructive feedback from my teammates on specific topics of their expertise such as firmware and electronics.

The relationship between this report and my work is that the report captures all the new knowledge developed about electronic wireless model rocketry which is a brand new field of knowledge in the group. Also this report allows me to reflect on the engineering design and analysis behind several complex systems in the rocket which all manifest into very useful lessons for my future career. It also serves as a reminder that any technical knowledge, even rocket science, can be learned from the ground up in a short span of time as long as you put your curious and analytical mind behind it!

In the broader scheme of things, my work at Nordic Semiconductor on the BLE model rocket project has set

an example that broadens the horizon on what kind of applications BLE can be at the heart of. It pushes the boundaries on what kind of devices people typically associate with BLE and have also generated significant social media interest for Nordic Semiconductor by live broadcasting the rocket launch on Facebook, thusly creating a cool and fun image for the company. My work with the rocket has also introduced many members of the team to a cloud-based 3D modeling software, OnShape, that I have picked up from my previous work term that is much more powerful and easier to use than the then status quo in the office, SketchUp. And most importantly it got many team members and their children interested in model rocketry which actually fulfills one of the main missions of the model rocketry industry, to stimulate interest in the wider public about science and engineering through this exciting hobby.

## Summary

The main purpose of the report is to summarize and communicate the research and development done on the BLE model rocket project in my work term at Nordic Semiconductor ASA in Trondheim, Norway. This report will communicate the motivation and significance of the project that I had worked on and also record the engineering analysis and design that went into this work. The scope of this work includes the background research done in model rocketry, the different design options considered for the prototype, the construction requirements for launch, and several recommendations for future revisions of the rocket.

The major points documented in this report are the entire design and prototyping phases of the model rocket and the recorded details where are important to the successful ignition, flight, and recovery of the rocket. Also, sufficient background in model rocketry and BLE electronics is provided in order to give insight to some of the related design decisions related to those fields.

The major conclusions documented in this report are that using BLE to remotely control the launch of a model rocket is more versatile, convenient, and safe than traditional methods of a wired ignition box; that a BLE chip coupled with power amplifier can easily achieve a communication range of more than 200 meters if the antenna is properly tuned; and that real-time telemetry data from the rocket is an insightful metric into the flight performance of the rocket.

The major recommendations of this report are that the exhaust end of the rocket should be sufficiently lifted from ground to avoid undesired ignition of adjacent engines in a multistage launch; that the parachute deployment system should be rocket-body-orientation-agnostic; and that flight data should be internally logged into the random access memory (RAM) of the BLE chip as well as communicated over the air in case the rocket travels out of range, so that the data can be read back after retrieval of the rocket.

## Conclusions

## Recommendations

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

## Table of Contents

Contributions . . . . .	iii
Summary . . . . .	v
Conclusions . . . . .	vi
Recommendations . . . . .	vii
List of Figures . . . . .	ix
List of Tables . . . . .	x
1.0 Introduction. . . . .	1
2.0 Background. . . . .	1
2.1 Model Rocketry . . . . .	1
2.1.1 Model Rocketry Engines . . . . .	4
2.1.2 Model Rocketry Physics . . . . .	4
2.2 Bluetooth Low Energy . . . . .	6
2.2.1 BLE Radio . . . . .	7
3.0 Design Requirements . . . . .	7
4.0 Math . . . . .	8
4.1 The Bloch Equations. . . . .	8
4.2 The Schrodinger Equation . . . . .	8
5.0 Graphics . . . . .	9
6.0 Conclusions. . . . .	9
7.0 Recommendations . . . . .	9
References . . . . .	11
Appendix A: Here's An Appendix. . . . .	11
Appendix B: Here's Another Appendix . . . . .	12
Appendix C: A Figure in An Appendix . . . . .	13
Appendix D: A Table in An Appendix . . . . .	14



## List of Figures

Figure 1	Typical model rocket components - without engine [1] . . . . .	2
Figure 2	Ignition Box [1] . . . . .	2
Figure 3	Model Rocket Flight Phases [2] . . . . .	3
Figure 4	Rocket engine dissection [2] . . . . .	4
Figure 5	Perturbing forces on a model rocket . . . . .	5
Figure 6	How fins on model rockets stabilize it in flight . . . . .	6
Figure 7	Fulcrum model of perturbing forces on a model rocket . . . . .	6
Figure 8	A stock computer, I just wanted a picture here . . . . .	9
Figure C.1	It's back! . . . . .	13
Figure C.2	Testing Number . . . . .	13

## List of Tables

Table 1	A table demonstrating $\text{\LaTeX}$ formatting . . . . .	8
Table D.1	A Table in an Appendix, displaying the correct numbering . . . . .	14
Table D.2	Another table to test numbering . . . . .	14

## **1.0 Introduction**

The goal of the project captured in this report is to demonstrate a reference design of a BLE controlled model rocket, which can be launched, recovered, and reused, using Nordic's nRF52832 SoC in order to generate more market interest in utilizing Nordic's products and more importantly to showcase the possibility of deploying BLE in medium range applications in anticipation of the significantly increased range of the next Bluetooth Specification to be released. Despite the fact that, given the time allotted, the end result is a simply a working PoC and far from a polished design ready to be in the market, it is still a highly multidisciplinary and complex project consisting of design considerations in aerodynamics, newtonian mechanics, embedded system design, radio frequency (RF) electronics, and user experience. In addition, recommendations will be provided to fix and improve upon the current design of the rocket to make it more reliable, more performant, and more user friendly.

In order to understand the design and engineering process behind this report however, a sufficient amount of background knowledge on model rocketry and BLE electronics is required and hence will be provided next.

## **2.0 Background**

The background sections introduces many important concepts in model rocketry and BLE electronics at a high level with enough details to allow the understanding and appreciation of the work reported herein.

### **2.1 Model Rocketry**

Model rocketry is a popular hobby that originated in the late 1950's, coinciding with the dawn of the space age, as many space enthusiasts were inspired to build their own rockets by the sight of the space boosters carrying the first artificial satellite into space [1]. It started as an extremely dangerous hobby as many people were attempting to create their own propellants with unstable chemicals that often resulted in injuries or tragedies. It was not until when Estes Industries was founded in 1958 to mass manufacture solid propellant model rocket engines did the hobby become safe and very popular amongst younger aspiring rocketeers and families [1].

Popular model rockets today are mainly constructed with safe materials such as cardboard, plastic, and balsa wood, with sizes ranging from 1 foot to 6 feet. They are fueled by single-use rocket motors (note that the

terms motor and engine can be used exchangeably) manufactured professionally by companies such as Estes. The rockets typically contain a recovery device such as a parachute to enable gentle landing and recovery for future flights and reuse of the rocket. The rocket can be flown again by simply replacing the used motor with a fresh one. Typical entry-level model rocket components are shown in Figure 1 below.

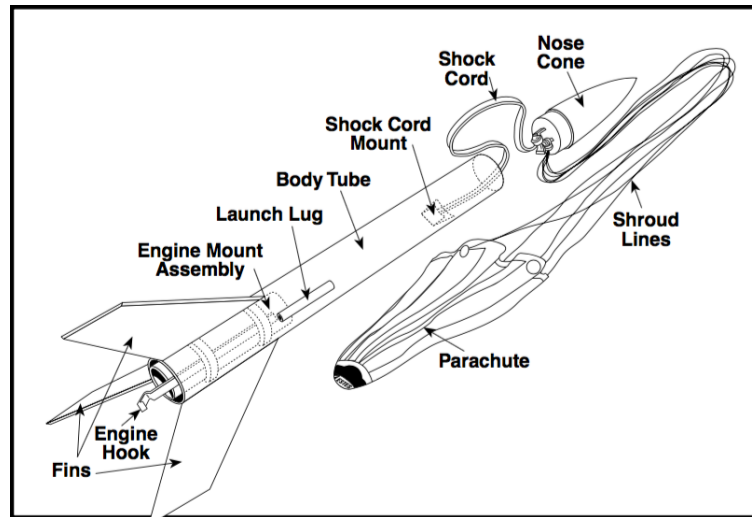


Figure 1: Typical model rocket components - without engine [1]

Typically, a model rocket launch consists of 7 distinct phases: ignition, lift-off, burnout, coasting, apogee, parachute ejection, and soft landing. During ignition, the rocket engine is ignited electrically from a box containing circuits external to the rocket as shown in Figure 2.

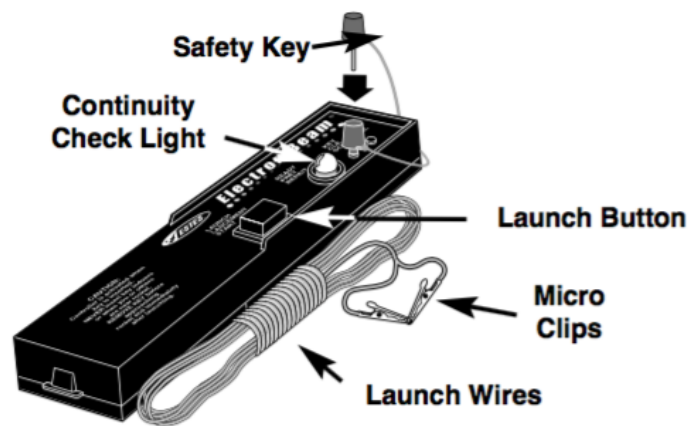


Figure 2: Ignition Box [1]

Once the engines are ignited, the rocket will enter the lift-off phase where it accelerates very rapidly off of the launch pad due to the rapid ejection of hot gas (in model rocketry, a launch pad is just a structure that mechanically guides the rocket straight upwards during lift-off). After the rocket leaves the launch pad, it enters the burnout phase where the rest of the propulsion fuel is gradually ejected from the engine and rocket's

upward acceleration starts to diminish. At the point where all the propulsion in the engine is exhausted and the provided thrust and therefore upward acceleration becomes zero, the rocket enters the coasting phase, where gravity and air drag begins to slow down the rocket to zero upward velocity. At the point of zero upward velocity, the rocket has reached its apogee, the highest altitude of its flight. Some point after apogee, parachute ejection should take place, preferably as soon as possible after apogee to prevent the rocket from gaining too much downward velocity due to gravity. After parachute ejection, the rocket will eventually enter the last stage of its flight, soft landing. A summative illustration of typical flight phases taken from the Centuri Model Rocket Designers Manual[2] is shown in Figure 3.

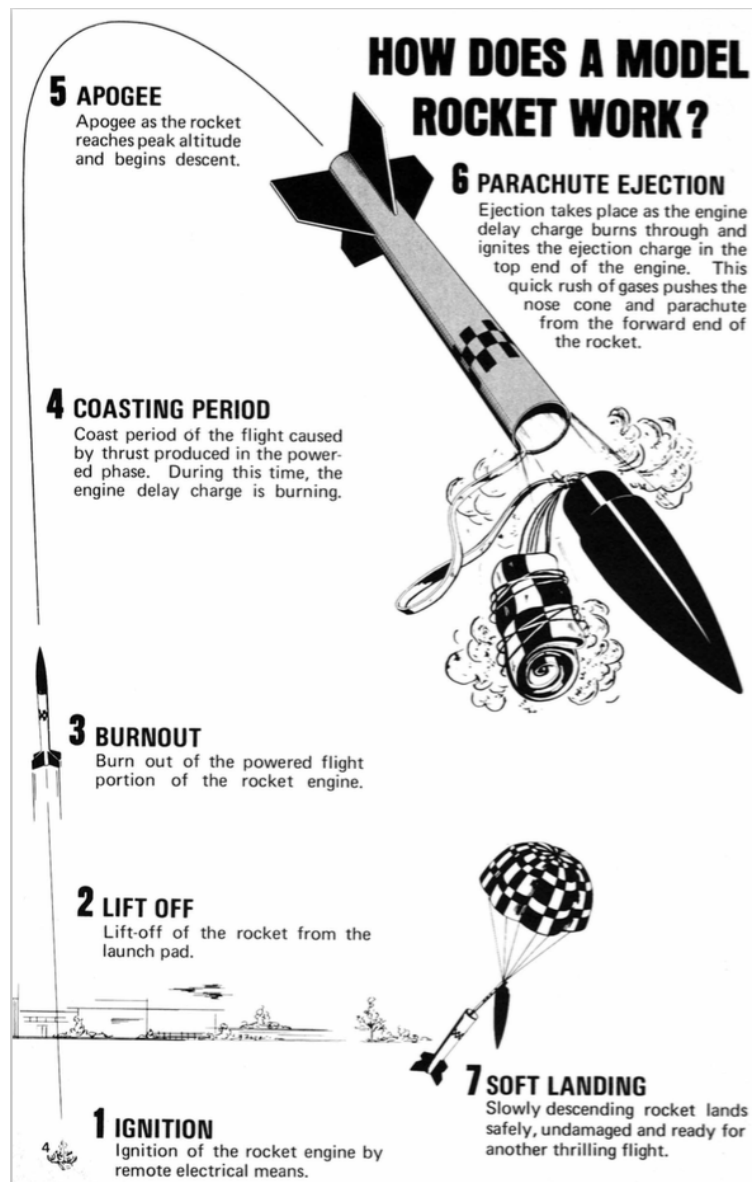


Figure 3: Model Rocket Flight Phases [2]

### 2.1.1 Model Rocketry Engines

The engines are the single most important component of any typical model rocket since it is most often responsible for two of the most crucial tasks in rocket flight: provide propulsion and trigger parachute deployment. A visual dissection of a typical model rocket engine is shown in Figure 4. Model rocket engines typically use black powder as solid-fuel to provide thrust to the rocket by rapidly ejecting hot gas out the exhaust end of the engine. After the complete burnout of propulsion material there is a short period of delay charge inside the engine that burns for easier visual tracking but provides no significant thrust to allow the rocket to coast to apogee. Then finally the ejection charge ignites and fills the rocket body tube with hot gas. The sudden increase in pressure in the body tube will pop open the nose cone and push out the parachute assembly. Model rocket engines are categorized with codes indicating their total impulse in newton seconds, average thrust in newtons, and delay charge time in seconds. For model rockets the total impulse range from A to G. A being 0 to 2.5 Ns, and B being 2.6 to 5, with each subsequent letter having twice the max allowed total impulse as previous. The average thrust is simply indicated by a number that is the average thrust in newtons, and the delay charge time is also just a number in the number of seconds. For example a engine with the code C4-3 means it has a total impulse somewhere from 5.1 to 10 Ns, with an average thrust of 4 Newtons and a delay charge time of 3 seconds. All manufacturers of rocket motors will provided datasheets specifying the exact impulse and thrust curve of their engines.

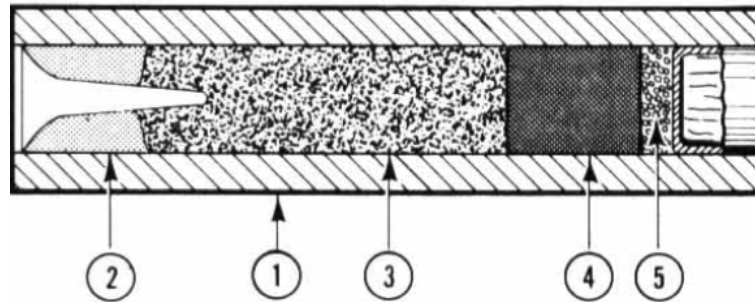


Figure 4: Rocket engine dissection [2]

### 2.1.2 Model Rocketry Physics

The provided overview above of the typical model rocket flight process above sets up the foundation for a general understanding of the sequence of tasks that the BLE model rocket reported in this work must fulfill in order to perform a successful launch. Next it will be very important to provide a background of the physics involved in a successful rocket launch as the mechanical design of the rocket must adhere strictly to the physical guidelines imposed by the laws of aerodynamics and newtonian mechanics in order to ensure a

successful flight.

Like anything that flies, model rockets get airborne by generating enough upward force to overcome gravity and air drag. A model rocket takes flight by utilizing rocket motors which eject gas at high velocities downward out the tail end of the rocket and as a result generating thrust upward (Newton's Second Law). To get airborne, the thrust generated must abide by the following equation:

$$\frac{(F_{thrust} - F_{drag})}{Mass_{rocket}} \geq 9.8 \frac{m}{s^2} \quad (1)$$

$$(2)$$

The most important factor to consider in model rocketry is aerodynamic stability. Aerodynamic stability describes a rocket's ability keep its nose pointed in the same direction throughout its upward flight [1]. In more technical language, it is its ability to resist rotation around its center of gravity (CG) while under perturbing forces from factors such as wind or misaligned motor thrust while flying in the air. The two factors above are the main perturbing forces to consider and they are illustrated in Figure ??.

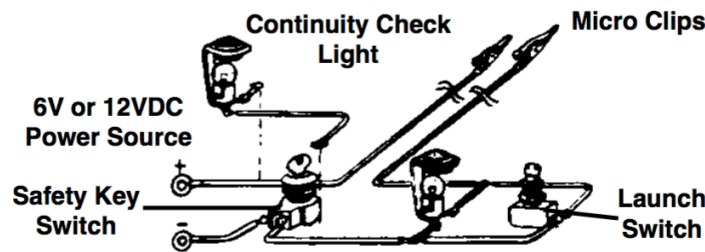


Figure 5: Perturbing forces on a model rocket

Any small perturbations will cause a small (less than 5 degrees) angle of attack (AoA)  $\alpha$ , and if goes uncorrected, this AOT will become larger and larger which will eventually cause the rocket to tumble uncontrollably in the air and crash into the ground, which is extremely dangerous. To prevent this from happening, fins are utilized on model rockets to provide the stabilizing force. As  $\alpha$  increases, the surface area of the fins that are exposed to the oncoming airflow parallel to the flight path increases and the resulting drag on the fins will push back and stabilize the rocket by reducing  $\alpha$ , as shown in 6

While in the air, the forces perpendicular to the length direction of the rocket can be modeled by a rigid beam on a fulcrum at its CG as shown in Figure 7. Another very important point to consider beside the CG is the center of pressure (CP). The center of pressure is the point where all the aerodynamic forces will act through, just like how the gravitational force will act through the center of gravity. And similar to how the location and amount of mass distributed across an object affects the center of gravity, the location and amount of of

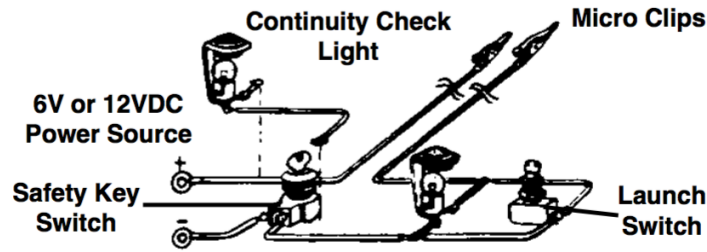


Figure 6: How fins on model rockets stabilize it in flight

surface area distributed across an object affects the location of center of pressure.

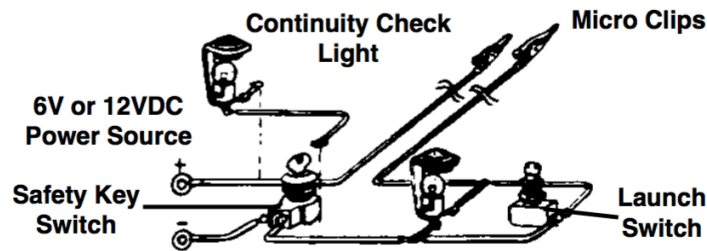


Figure 7: Fulcrum model of perturbing forces on a model rocket

The rule of thumb provided by most model rocket makers and experts is that the center of pressure should be at around 1 to 1.5 calibres (a calibre is equal to the diameter of the body tube) aft of the center of mass in order for the fins to have enough torque on the rocket body to stabilize the rocket during flight[1] [2].

## 2.2 Bluetooth Low Energy

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



### 2.2.1 BLE Radio

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

BWOOOONG!

## 3.0 Design Requirements

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Here's a reference to table 1

Table 1: A table demonstrating L<sup>A</sup>T<sub>E</sub>X formatting

title	number	decimal
heading	1	1.7
another heading	2	3.4

## 4.0 Math

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### 4.1 The Bloch Equations

$$\frac{dM_x(t)}{dt} = \gamma(\mathbf{M}(t) \times \mathbf{B}(t))_x - \frac{M_x(t)}{T_2} \quad (3)$$

$$\frac{dM_y(t)}{dt} = \gamma(\mathbf{M}(t) \times \mathbf{B}(t))_y - \frac{M_y(t)}{T_2} \quad (4)$$

$$\frac{dM_z(t)}{dt} = \gamma(\mathbf{M}(t) \times \mathbf{B}(t))_z - \frac{M_z(t) - M_0}{T_1} \quad (5)$$

### 4.2 The Schrodinger Equation

$$i\hbar \frac{\partial \Psi}{\partial t} = \hat{H}\Psi \quad (6)$$

## 5.0 Graphics

Here's a stock image of a computer. It comes with a CC0 license, enabling free distribution for commercial and personal use. It's a JPEG.



Figure 8: A stock computer, I just wanted a picture here

## 6.0 Conclusions

$\text{\LaTeX}$  is awesome.

## 7.0 Recommendations

Use more  $\text{\LaTeX}$ . Also, use more Unix. Also, citations like [3] will lead to a better quality of work.



## References

- [1] W. Simon. (2012). Estes model rocketry technical manual, [Online]. Available: [www2.estesrockets.com/pdf/2819\\_Estes\\_Model\\_Rocketry\\_Technical\\_Manual.pdf](http://www2.estesrockets.com/pdf/2819_Estes_Model_Rocketry_Technical_Manual.pdf) (visited on 09/30/2016).
- [2] C. E. Company. (1971). Centuri model rocket designers manual, [Online]. Available: <http://sargrocket.org/documents/centuri/dm-1.pdf> (visited on 10/10/2016).
- [3] K. Townsend, C. Cufi, Akiba, and R. Davidson, *Getting Started with Bluetooth Low Energy*. Sebastopol, CA: O'Reilly Media, 2014, 180 pp., ISBN: 978-1-4919-4951-1.

## Appendix A: Here's An Appendix

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

## Appendix B: Here's Another Appendix

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

## Appendix C: A Figure in An Appendix

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



Figure C.1 : It's back!



Figure C.2 : Testing Number



Table D.1: A Table in an Appendix, displaying the correct numbering

Abbreviation	Definition
BLE	Bluetooth Low Energy
SoC	System on Chip

Table D.2: Another table to test numbering

Data	Integer	String
Foo	1	"bar"

## Appendix D: A Table in An Appendix

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.