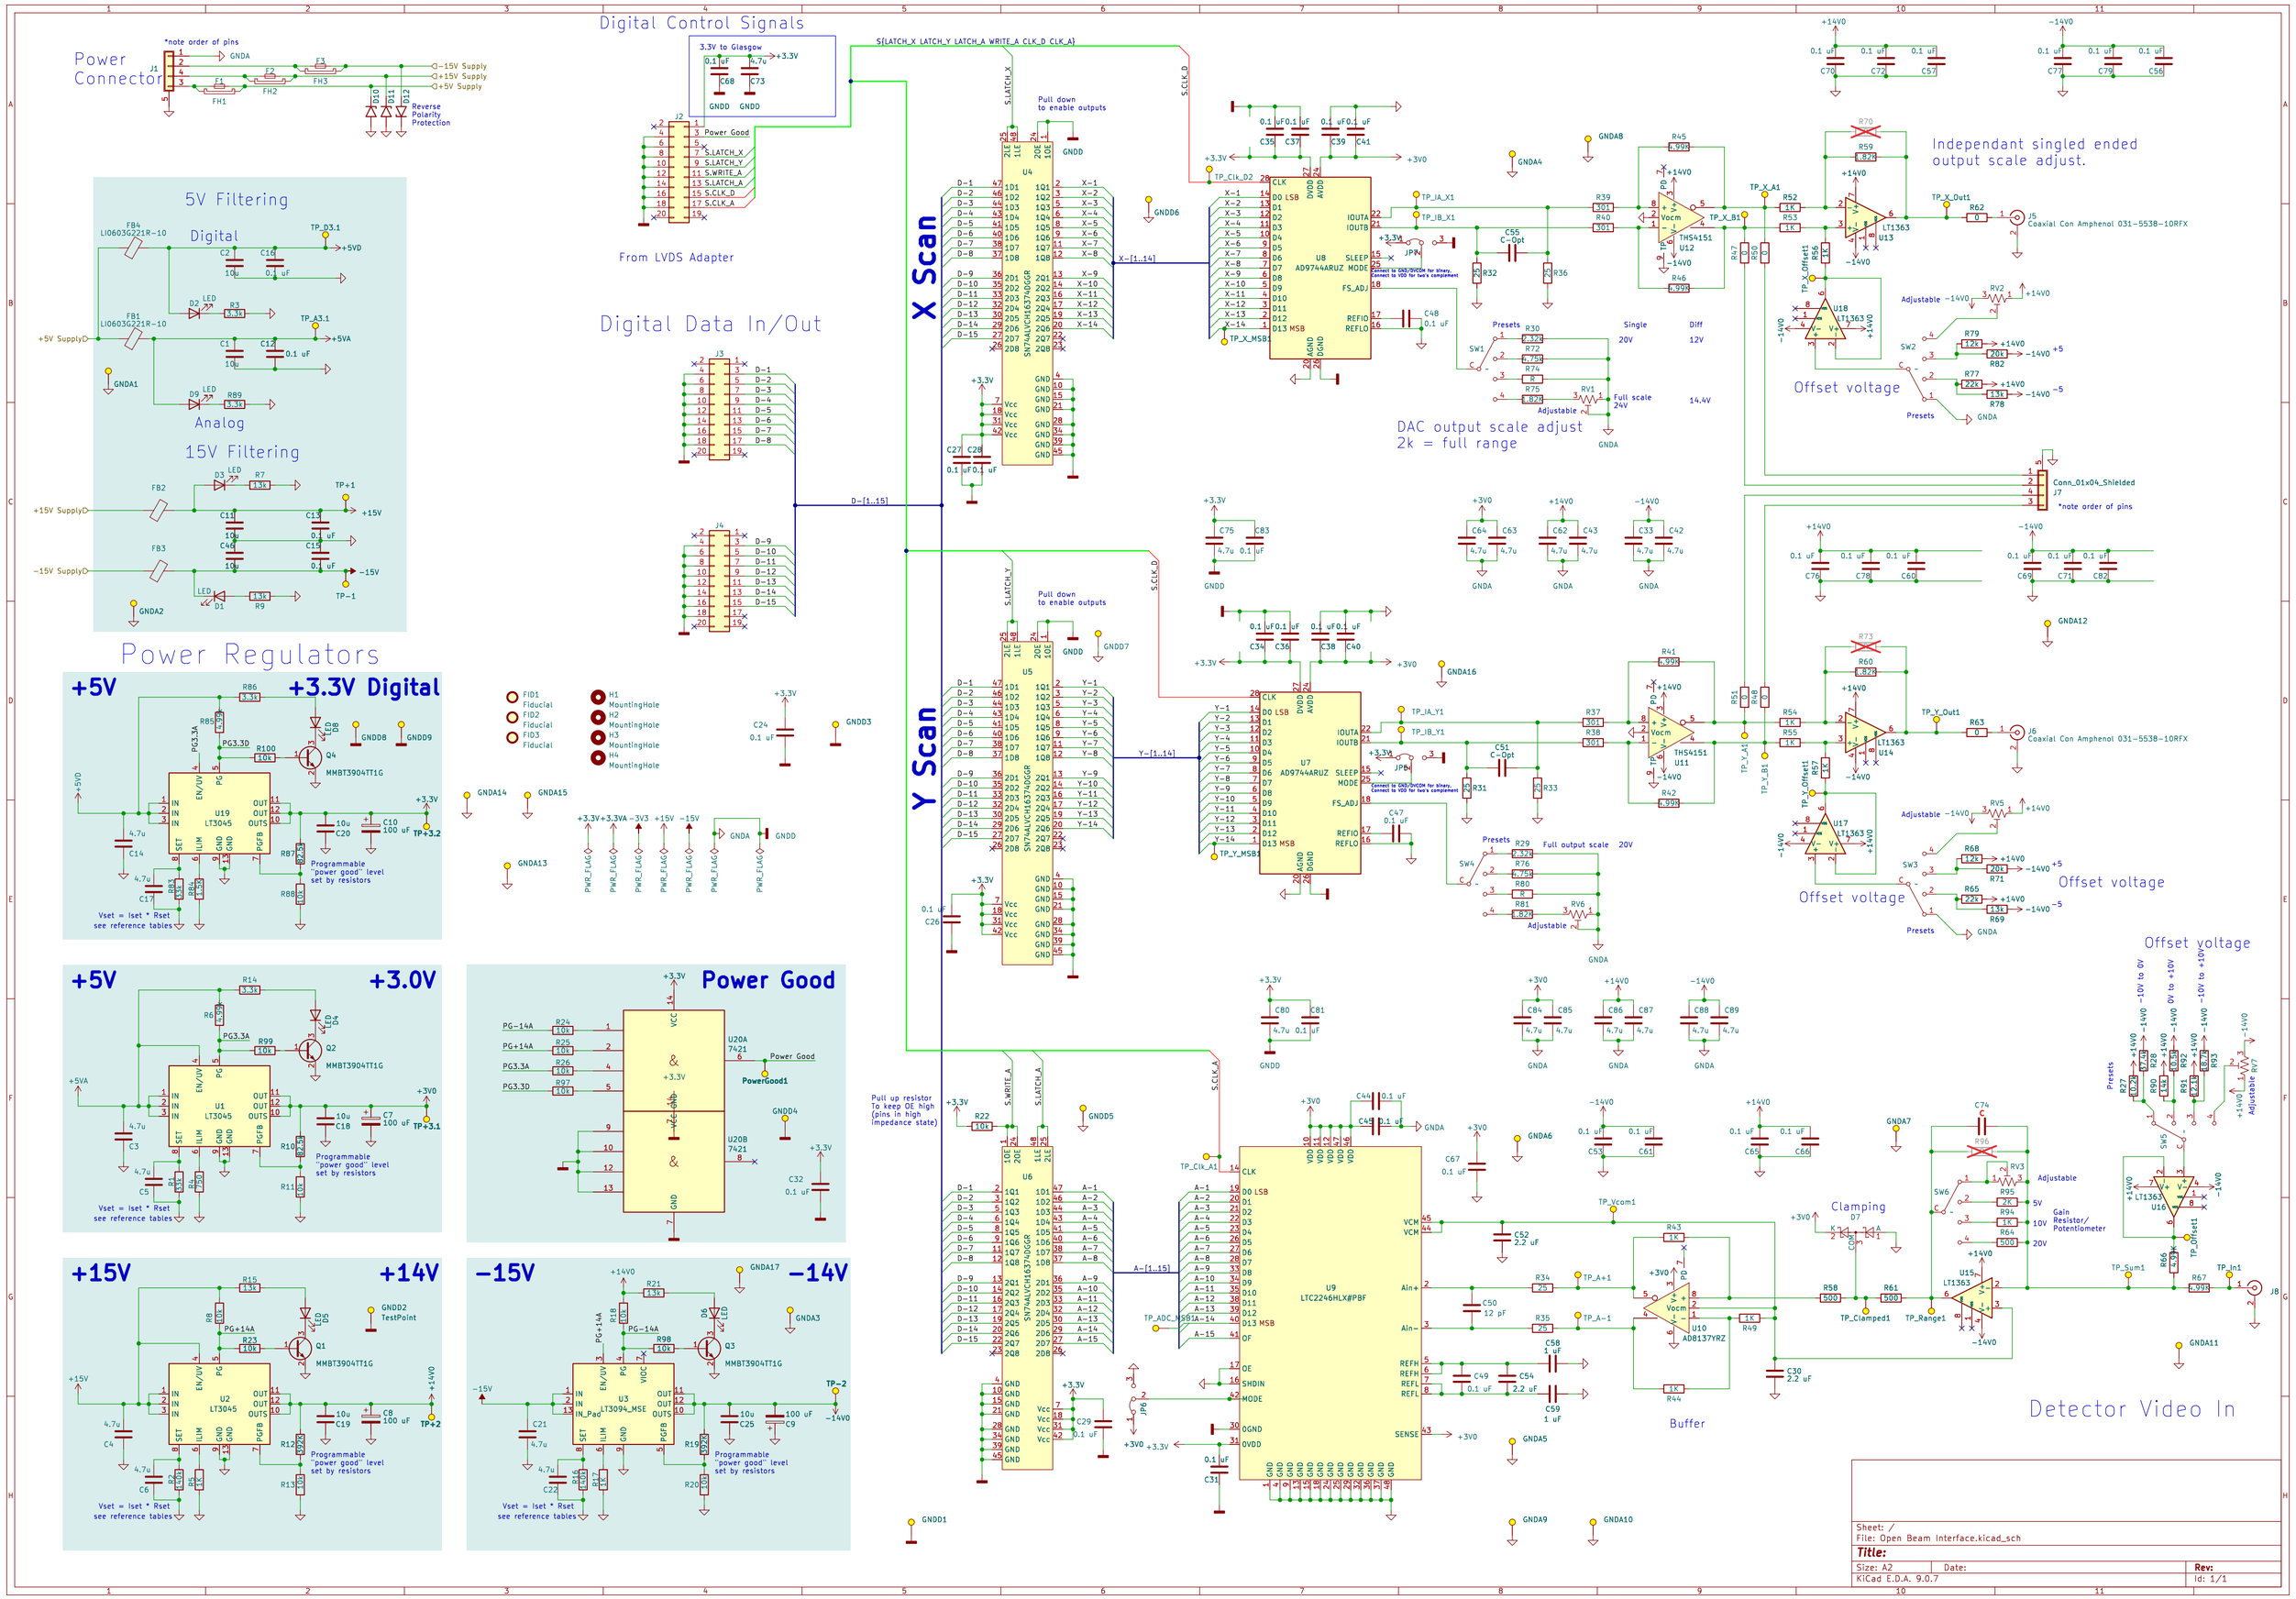
Power Connector
*note order of pins
Reverse Polarity Protection
Digital Control Signals
3.3V to Glasgow
From LVDS Adapter
Power Good
5V Filtering
Digital
Analog
15V Filtering
Power Regulators
+5V
+3.3V Digital
+3.0V
+15V
+14V
−15V
−14V
Programmable "power good" level set by resistors
Vset = Iset * Rset see reference tables
Power Good
X Scan
Y Scan
Digital Data In/Out
Pull down to enable outputs
Pull up resistor To keep OE high (pins in high impedance state)
Independant singled ended output scale adjust.
DAC output scale adjust 2k = full range
Offset voltage
Clamping
Buffer
Detector Video In
Coaxial Con Amphenol 031-5538-10RFX
Sheet: /
File: Open Beam Interface.kicad_sch
Title:
Size: A2
Date:
Rev:
KiCad E.D.A. 9.0.7
Id: 1/1