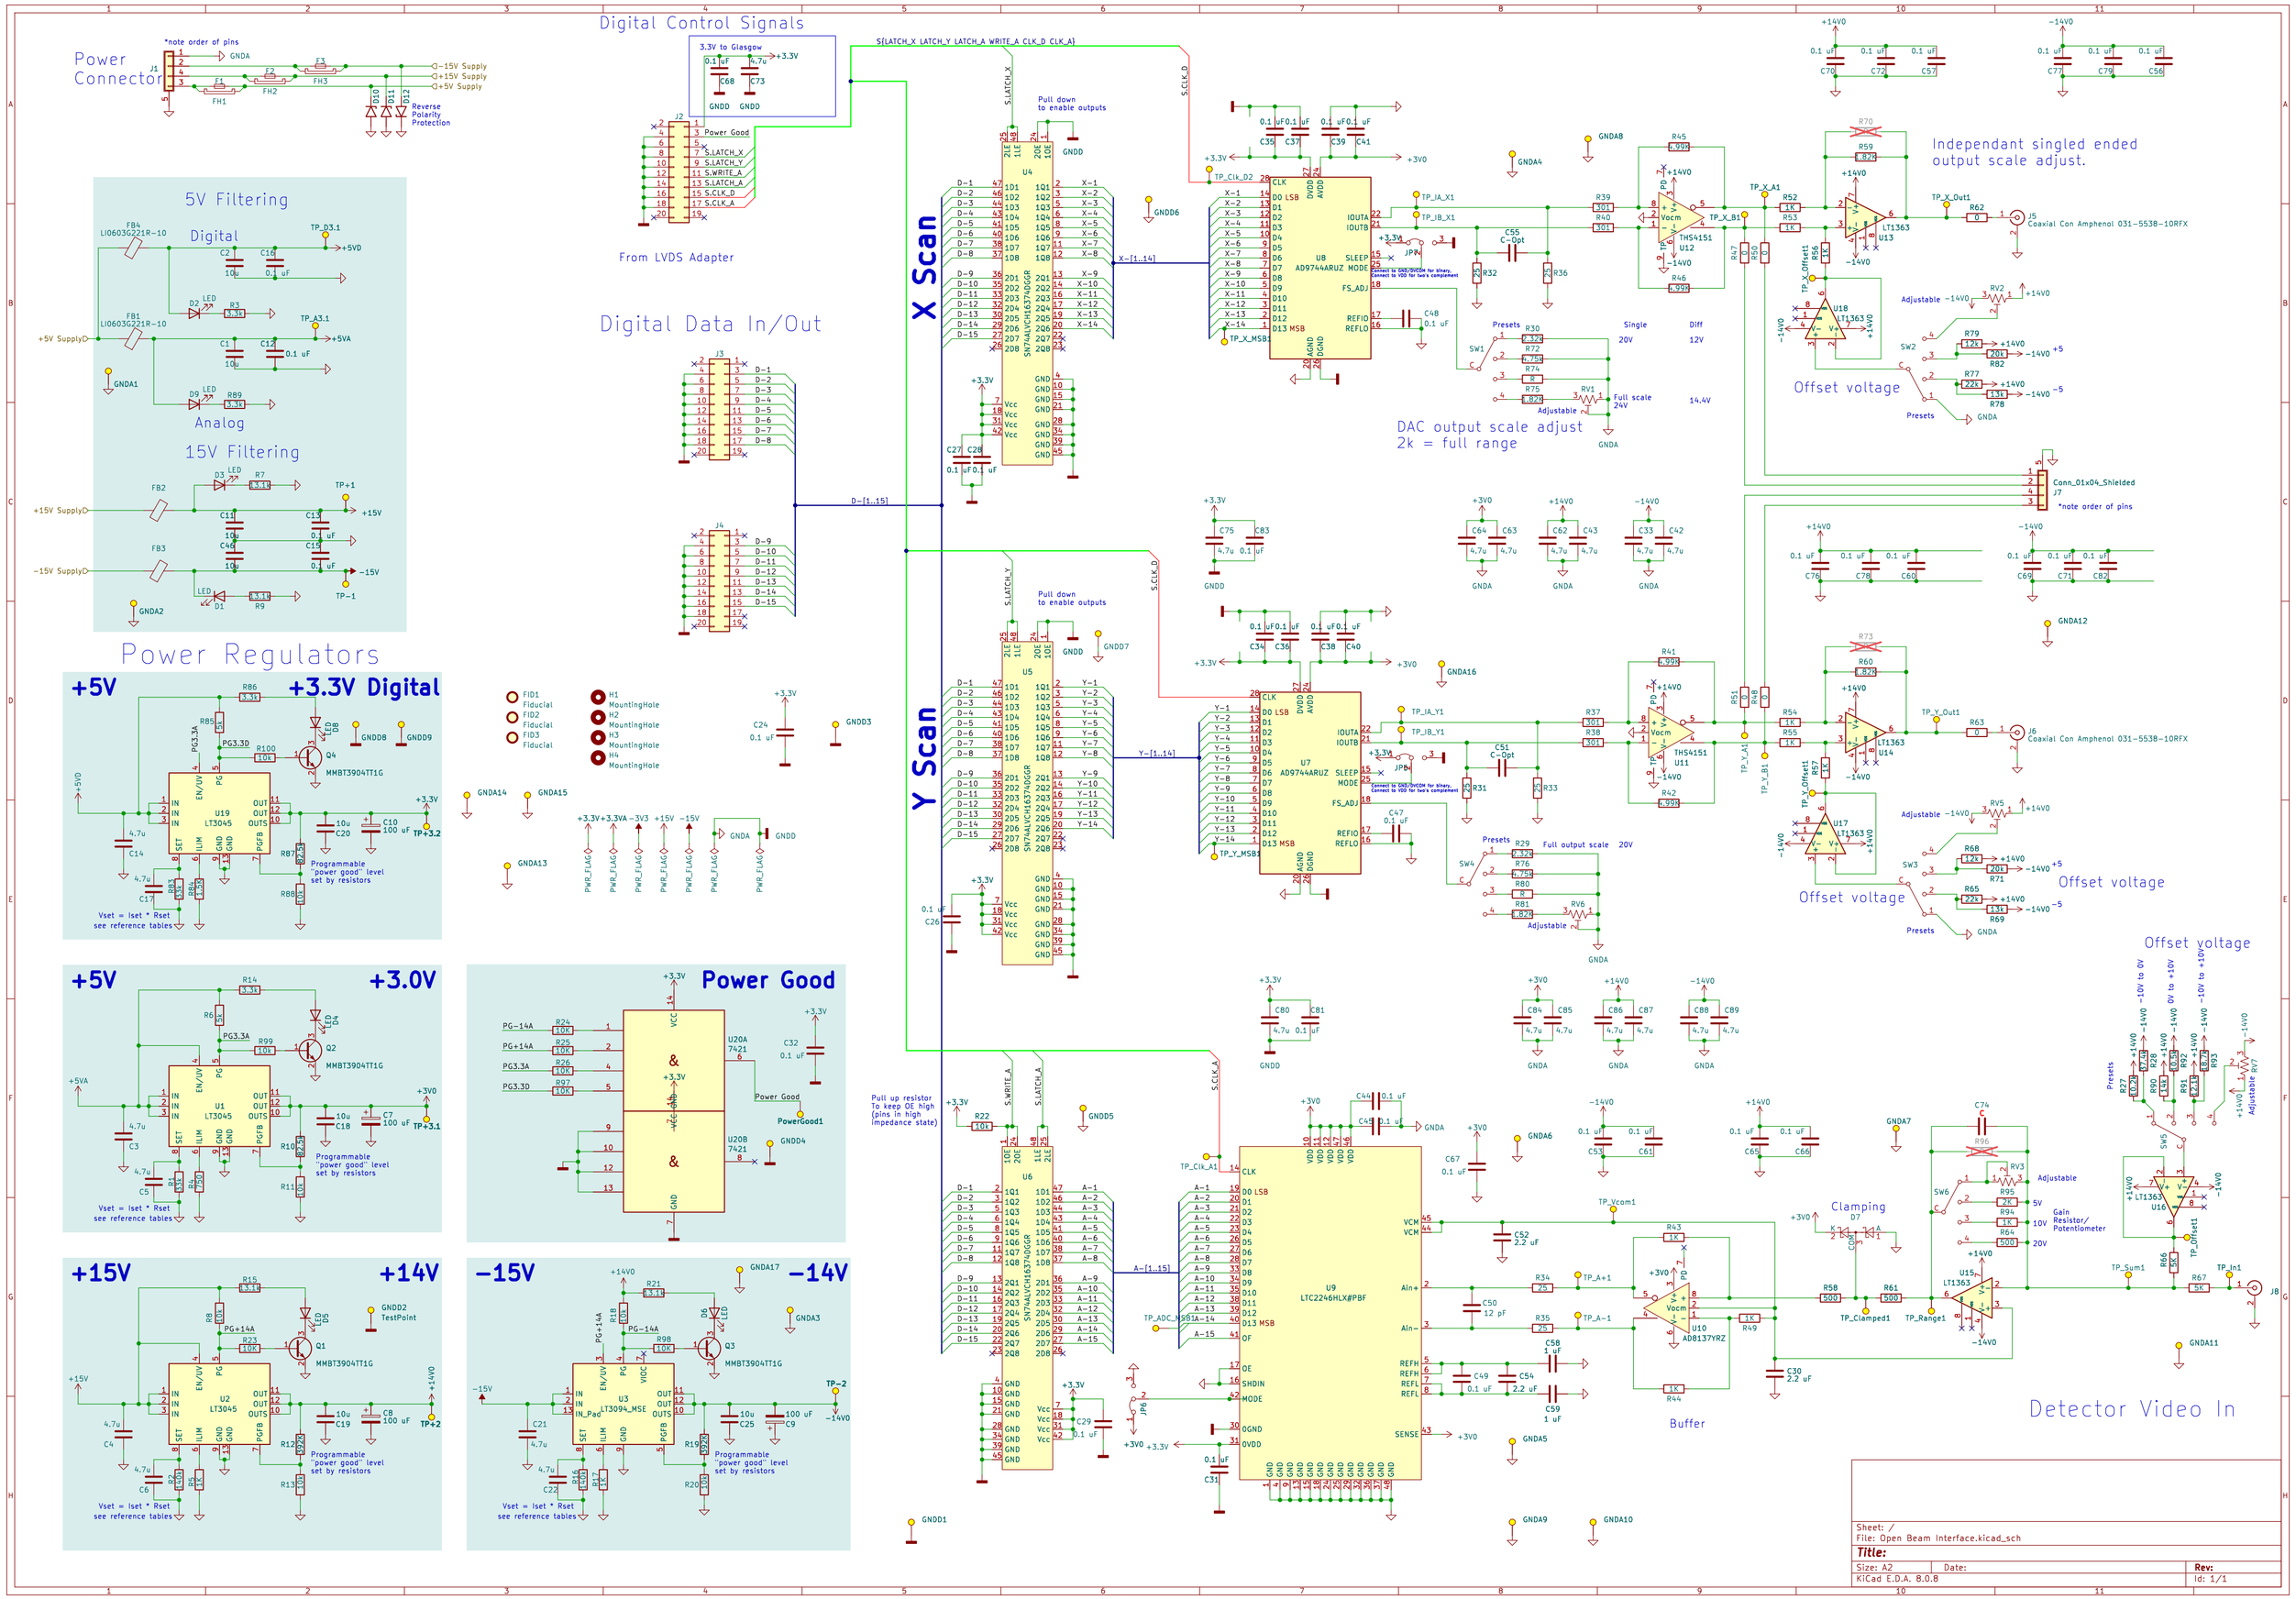
Power Connector
*note order of pins
Reverse Polarity Protection
Digital Control Signals
3.3V to Glasgow
From LVDS Adapter
Power Good
S.LATCH_X
S.LATCH_Y
S.WRITE_A
S.LATCH_A
S.CLK_A
S.CLK_D
Pull down to enable outputs
X Scan
Y Scan
Digital Data In/Out
D-[1..15]
X-[1..14]
Y-[1..14]
A-[1..15]
Independant singled ended output scale adjust.
Coaxial Con Amphenol 031-5538-10RFX
Conn_01x04_Shielded
*note order of pins
DAC output scale adjust
2k = full range
Offset voltage
Clamping
Buffer
Detector Video In
5V Filtering
Digital
Analog
15V Filtering
Power Regulators
+5V
+3.3V Digital
+3.0V
+15V
+14V
-15V
-14V
Programmable "power good" level set by resistors
Vset = Iset * Rset
see reference tables
Power Good
Pull up resistor To keep OE high (pins in high impedance state)
Sheet: /
File: Open Beam Interface.kicad_sch
Title:
Size: A2
Date:
Rev:
KiCad E.D.A. 8.0.8
Id: 1/1