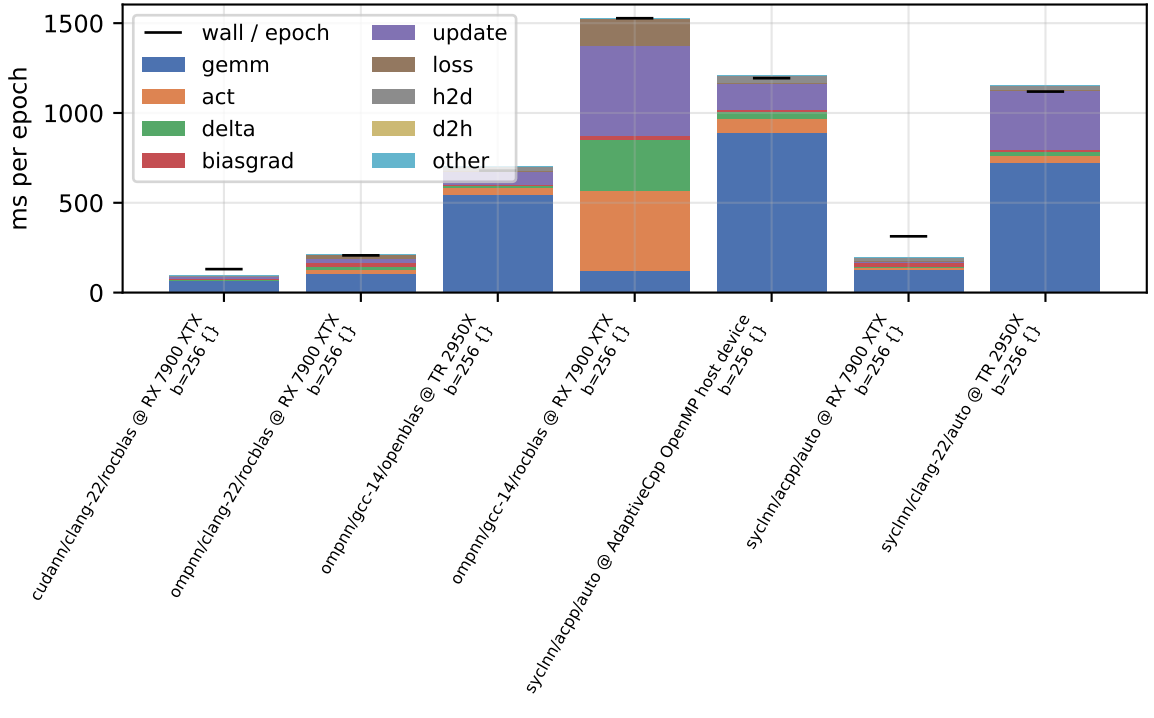
per-phase device time - mnist-512-256 (float, train)
ms per epoch
1500
1000
500
0
wall / epoch
gemm
act
delta
biasgrad
update
loss
h2d
d2h
other
cudann/clang-22/rocblas @ RX 7900 XTX b=256 {}
ompnn/clang-22/rocblas @ RX 7900 XTX b=256 {}
ompnn/gcc-14/openblas @ TR 2950X b=256 {}
ompnn/gcc-14/rocblas @ RX 7900 XTX b=256 {}
syclnn/acpp/auto @ AdaptiveCpp OpenMP host device b=256 {}
syclnn/acpp/auto @ RX 7900 XTX b=256 {}
syclnn/clang-22/auto @ TR 2950X b=256 {}