

CZF Microchannel Series

Powered by Copeland Scroll



- Microchannel condenser
- Generous low noise level condensers
- Better energy efficiency
- Reliable and efficient Copeland ZF scroll compressors
- Fully wired in a waterproof powder coated enclosure

R404A

2.0 7.5 HP

LOW TEMP

Model	Amb. (°C)	Capacity (kW)							Power Input (kW)						
		Evaporating Temperature (°C)							Evaporating Temperature (°C)						
		-40	-35	-30	-25	-20	-15	-10	-40	-35	-30	-25	-20	-15	-10
CZFM200	32	1.08	1.38	1.73	2.13	2.61	3.17	3.80	1.52	1.58	1.66	1.75	1.85	1.96	2.08
	38	0.97	1.24	1.56	1.93	2.37	2.87	3.45	1.67	1.74	1.82	1.90	2.00	2.11	2.23
	43	0.88	1.12	1.41	1.75	2.15	2.61	3.15	1.83	1.89	1.97	2.05	2.14	2.25	2.37
CZFM300	32	1.44	1.84	2.30	2.84	3.47	4.18	5.00	1.87	1.91	1.96	2.03	2.13	2.25	2.38
	38	1.30	1.66	2.08	2.56	3.13	3.78	4.53	2.08	2.11	2.16	2.23	2.32	2.43	2.56
	43	1.17	1.50	1.88	2.32	2.83	3.43	4.11	2.28	2.31	2.35	2.41	2.50	2.61	2.74
CZFM350	32	1.80	2.29	2.84	3.47	4.20	5.04	6.00	2.26	2.31	2.38	2.48	2.61	2.76	2.93
	38	1.62	2.06	2.55	3.12	3.78	4.54	5.41	2.49	2.53	2.61	2.71	2.83	2.98	3.16
	43	1.45	1.85	2.29	2.81	3.40	4.09	4.89	2.69	2.74	2.82	2.92	3.05	3.20	3.38
CZFM400	32	2.07	2.69	3.40	4.22	5.18	6.27	7.51	2.30	2.38	2.48	2.60	2.73	2.89	3.06
	38	1.89	2.42	3.05	3.80	4.66	5.66	6.81	2.56	2.65	2.75	2.87	3.01	3.16	3.34
	43	1.74	2.20	2.75	3.41	4.20	5.12	6.19	2.81	2.90	3.01	3.13	3.27	3.43	3.60
CZFM500	32	2.55	3.33	4.22	5.25	6.43	7.82	9.39	2.90	3.04	3.20	3.37	3.56	3.78	4.02
	38	2.31	3.00	3.79	4.71	5.78	7.03	8.48	3.20	3.36	3.53	3.71	3.90	4.12	4.36
	43	2.12	2.72	3.43	4.25	5.21	6.35	7.67	3.48	3.65	3.83	4.02	4.23	4.45	4.70
CZFM600	32	3.14	4.01	5.01	6.16	7.52	9.09	10.91	3.52	3.66	3.81	4.00	4.19	4.42	4.67
	38	2.84	3.63	4.53	5.57	6.79	8.21	9.86	3.84	3.99	4.15	4.34	4.55	4.78	5.04
	43	2.56	3.28	4.09	5.04	6.15	7.45	8.97	4.15	4.30	4.48	4.67	4.88	5.12	5.38
CZFM750	32	3.86	4.91	6.19	7.71	9.43	11.33	13.36	3.72	4.07	4.40	4.72	5.08	5.49	6.01
	38	3.51	4.43	5.58	6.96	8.52	10.27	12.14	3.96	4.37	4.75	5.11	5.51	5.95	6.49
	43	3.23	4.03	5.07	6.31	7.75	9.35	11.09	4.17	4.63	5.05	5.45	5.88	6.36	6.93

Note: The rating condition is based on a suction superheat of 10 K, Subcool with the limits of the condensing unit.



R407F

2.0 7.5 HP

LOW TEMP

Model	Amb. (°C)	Capacity (kW)							Power Input (kW)						
		Evaporating Temperature (°C)							Evaporating Temperature (°C)						
		-40	-35	-30	-25	-20	-15	-10	-40	-35	-30	-25	-20	-15	-10
CZFM200	32	0.98	1.27	1.62	2.03	2.51	3.05	3.66	1.42	1.46	1.53	1.61	1.71	1.79	1.85
	38	0.90	1.17	1.50	1.88	2.32	2.83	3.39	1.60	1.63	1.70	1.79	1.89	1.98	2.05
	43	0.83	1.08	1.39	1.75	2.16	2.63	3.15	1.79	1.82	1.88	1.97	2.07	2.17	2.26
CZFM300	32	1.30	1.63	2.09	2.63	3.20	3.77	4.27	1.84	1.87	1.94	2.02	2.10	2.14	2.13
	38	1.19	1.50	1.94	2.44	2.97	3.47	3.91	2.05	2.10	2.18	2.27	2.35	2.39	2.36
	43	1.10	1.40	1.81	2.28	2.77	3.22	3.60	2.27	2.33	2.42	2.52	2.61	2.64	2.61
CZFM350	32	1.62	2.02	2.60	3.27	3.98	4.66	5.26	2.20	2.26	2.38	2.51	2.64	2.72	2.71
	38	1.48	1.86	2.40	3.03	3.67	4.28	4.79	2.47	2.55	2.69	2.84	2.98	3.06	3.04
	43	1.37	1.73	2.24	2.81				2.74	2.84	3.00	3.18			
CZFM400	32	1.92	2.40	3.07	3.90	4.85	5.87	6.95	2.10	2.21	2.33	2.46	2.58	2.71	2.81
	38	1.78	2.19	2.80	3.57	4.48	5.47	6.53	2.41	2.52	2.64	2.77	2.91	3.04	3.17
	43	1.67	2.00	2.56	3.29	4.16	5.13	6.16	2.74	2.84	2.96	3.09	3.23	3.37	3.51
CZFM500	32	2.40	2.93	3.69	4.66	5.81	7.09	8.49	2.70	2.84	3.01	3.18	3.34	3.47	3.55
	38	2.21	2.68	3.39	4.30	5.38	6.61	7.96	3.01	3.18	3.37	3.56	3.74	3.87	3.95
	43	2.03	2.46	3.11	3.98	5.02	6.20	7.50	3.33	3.53	3.75	3.96	4.15	4.29	4.37
CZFM600	32	2.89	3.56	4.50	5.66	7.01	8.51	10.11	3.21	3.36	3.58	3.83	4.06	4.22	4.30
	38	2.69	3.28	4.15	5.24	6.51	7.93	9.47	3.62	3.78	4.02	4.28	4.53	4.72	4.81
	43	2.50	3.04	3.85	4.87	6.09	7.46	8.93	4.02	4.19	4.43	4.71	4.97	5.17	5.28
CZFM750	32	3.64	4.46	5.63	7.10	8.79	10.65	12.66	3.86	4.06	4.34	4.64	4.93	5.16	5.26
	38	3.38	4.11	5.20	6.56	8.17	9.94	11.85	4.37	4.58	4.87	5.21	5.52	5.77	5.90
	43	3.13	3.80	4.82	6.11	7.64	9.33	11.16	4.87	5.08	5.39	5.73	6.06	6.33	6.49

Note: The rating condition is based on a suction superheat of 10 K, Subcool with the limits of the condensing unit.



R448A / R449A

2.0 7.5 HP

LOW TEMP

Model	Amb. (°C)	Capacity (kW)							Power Input (kW)						
		Evaporating Temperature (°C)							Evaporating Temperature (°C)						
		-40	-35	-30	-25	-20	-15	-10	-40	-35	-30	-25	-20	-15	-10
CZFM200	32	1.00	1.27	1.61	2.02	2.52	3.10	3.76	0.65	0.67	0.69	0.72	0.77	0.82	0.88
	38	0.93	1.18	1.50	1.90	2.36	2.90	3.52	0.74	0.75	0.78	0.81	0.85	0.90	0.96
	43	0.87	1.11	1.41	1.78	2.22	2.73	3.31	0.82	0.84	0.86	0.90	0.94	0.99	1.05
CZFM300	32	1.32	1.69	2.15	2.69	3.33	4.07	4.90	1.74	1.79	1.85	1.93	2.04	2.16	2.31
	38	1.23	1.58	2.01	2.51	3.11	3.79	4.56	2.00	2.04	2.10	2.18	2.27	2.39	2.54
	43	1.16	1.49	1.88	2.35	2.90	3.54	4.26	2.26	2.30	2.35	2.42	2.51	2.63	2.76
CZFM350	32	1.66	2.11	2.66	3.31	4.07	4.94	5.93	2.00	2.06	2.14	2.25	2.39	2.56	2.76
	38	1.54	1.97	2.48	3.08	3.78	4.58	5.50	2.29	2.35	2.44	2.55	2.68	2.85	3.04
	43	1.44	1.83	2.31	2.86	3.51	4.26	5.10	2.60	2.66	2.74	2.84	2.98	3.14	3.33
CZFM400	32	1.87	2.54	3.26	4.08	5.04	6.18	7.55	2.83	2.75	2.73	2.77	2.83	2.91	2.98
	38	1.71	2.33	2.99	3.73	4.61	5.68	6.94	3.35	3.23	3.17	3.18	3.22	3.28	3.34
	43	1.56	2.13	2.73	3.41	4.22	5.20	6.39	3.88	3.71	3.63	3.60	3.62	3.66	3.71
CZFM500	32	2.50	3.36	4.27	5.29	6.50	7.95	9.70	3.49	3.46	3.49	3.58	3.68	3.80	3.90
	38	2.42	3.22	4.06	5.00	6.10	7.43	9.05	4.10	4.03	4.03	4.08	4.17	4.28	4.37
	43	2.38	3.13	3.89	4.74	5.75	6.98	8.47	4.70	4.60	4.58	4.60	4.66	4.75	4.83
CZFM600	32	2.83	3.80	4.81	5.96	7.32	8.97	10.96	4.28	4.20	4.19	4.25	4.34	4.45	4.55
	38	2.56	3.48	4.43	5.48	6.73	8.23	10.06	4.98	4.83	4.78	4.80	4.87	4.96	5.05
	43	2.29	3.17	4.06	5.03	6.17	7.56	9.26	5.65	5.46	5.37	5.35	5.39	5.46	5.53
CZFM750	32	3.50	4.63	5.94	7.45	9.19	11.20	13.47	4.50	4.66	4.85	5.08	5.33	5.60	5.89
	38	3.20	4.25	5.45	6.85	8.47	10.32	12.42	5.06	5.24	5.46	5.70	5.96	6.26	6.58
	43	2.93	3.91	5.02	6.32	7.81	9.53	11.49	5.59	5.78	6.02	6.27	6.56	6.87	7.20

Note: The rating condition is based on a suction superheat of 10 K, Subcool with the limits of the condensing unit.




TECHNICAL DATA

MODEL NAME		CZFM200	CZFM300	CZFM350	CZFM400	CZFM500	CZFM600	CZFM750
Compressor	MODEL	ZF06KQE-TFD	ZF09KQE-TFD	ZF11KQE-TFD	ZF13KQE-TFD	ZF15KQE-TFD	ZF18KQE-TFD	ZF25KQE-TFD
	Rated Input Volt.	AC 380-420V/3PH/50Hz						
	RLA Amps	2.97	4.28	5.4	5.24	6.45	6.59	8.05
	MCC Amps	5	6	7.1	8	10.0	12.5	16.6
	LRA Amps	26	40	46	51.5	64	74	102
	Oil Type	POE(32cSt)						
	Oil Precharge (L)	0.6						
Condenser	Oil Quantity (L)	1.3	1.45	1.45	1.89	1.89	1.89	1.89
	Air Flow (m ³ /h)	3400	3400	3400	5200	7350	7350	8700
	Fan Motor (1)	1x20"	1x20"	1x20"	1x20"	2x18"	2x18"	2x20"
	Total Fan Power (W)	236	236	236	236	472	472	472
	Receiver (L)	4.7	4.7	4.7	4.7	4.7	7.9	7.9
	Accumulator (L)	1.9	1.9	1.9	1.9	4.6	4.6	4.6
	Suction Tube Size	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
	Liquid Tube Size	3/8"	3/8"	3/8"	3/8"	1/2"	1/2"	1/2"
Weight (kg)		82	84	85	104	116	124	135


Note : 1. All Fan 220-240V/1PH/50Hz (5 uf Capacitor)

DIMENSION



CZFM200
CZFM300
CZFM350

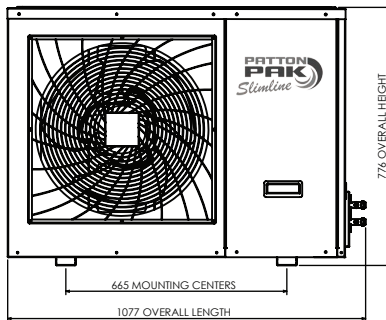

CZFM400

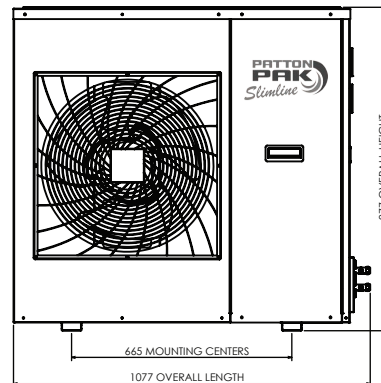

CZFM500
CZFM600
CZFM750

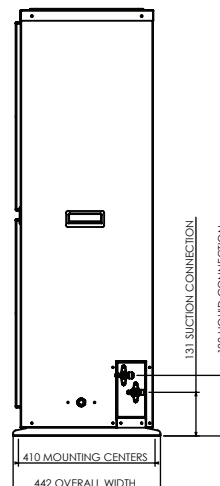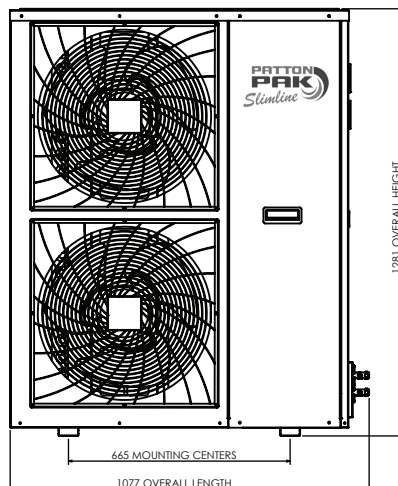

Products, specifications and technical data contained in this document are subject to change without prior notice.



"Quality we care, United we are"