
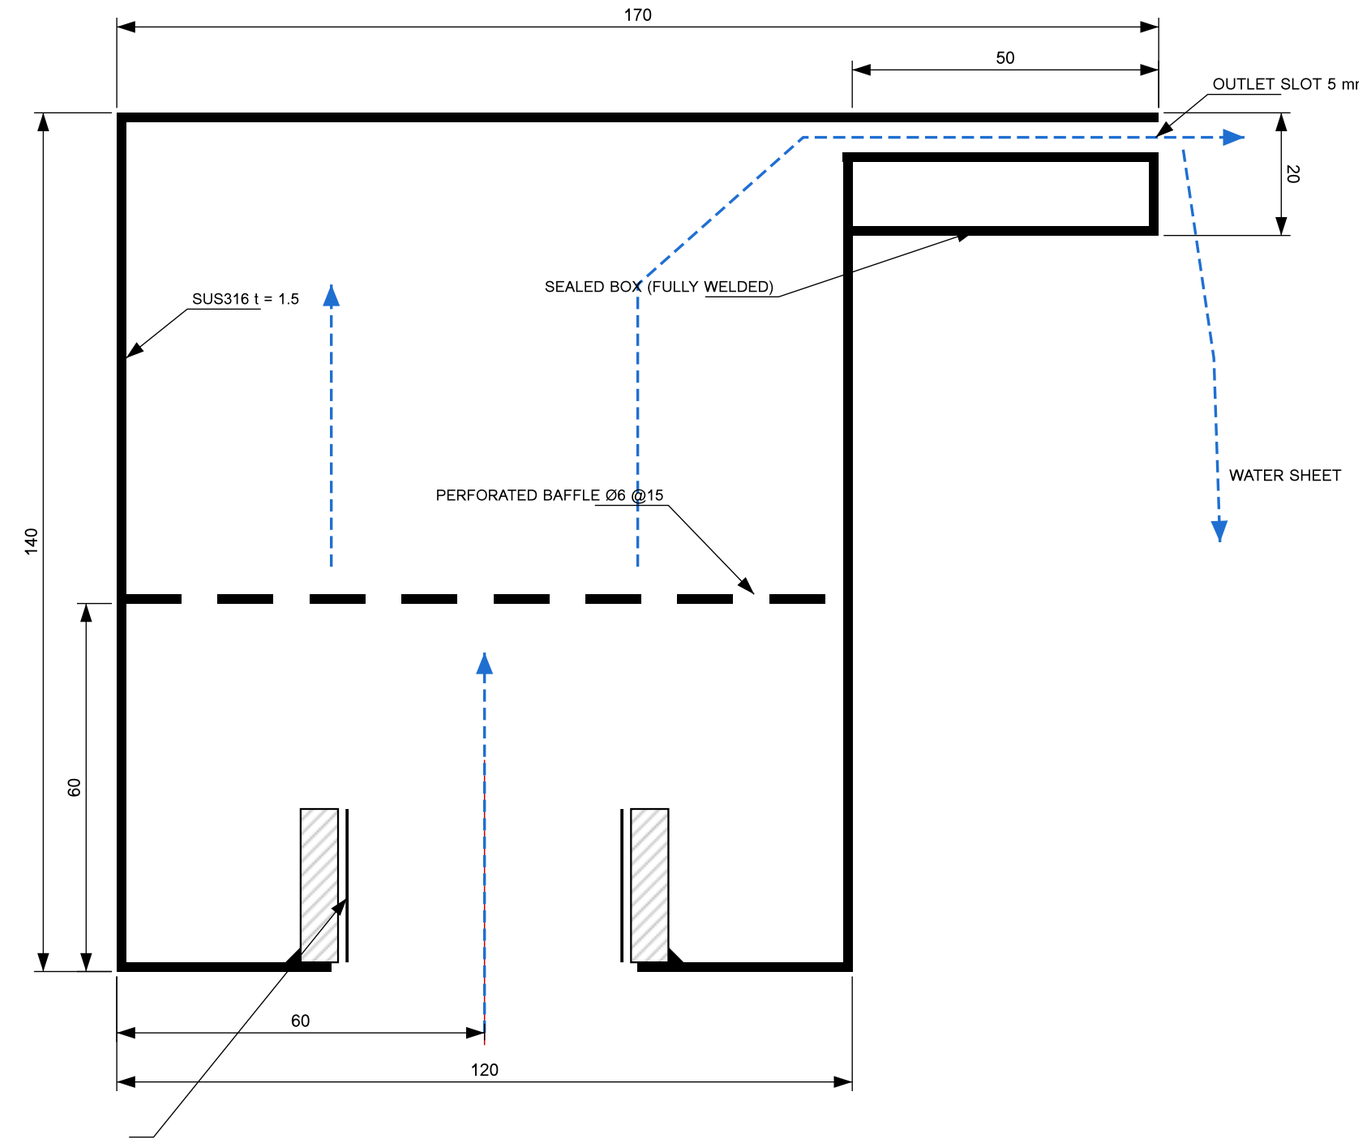



FEMALE THREAD G1½" (BSPP)
SUS316 SOCKET Ø60 × 25 H

SECTION A-A


SCALE 1:1

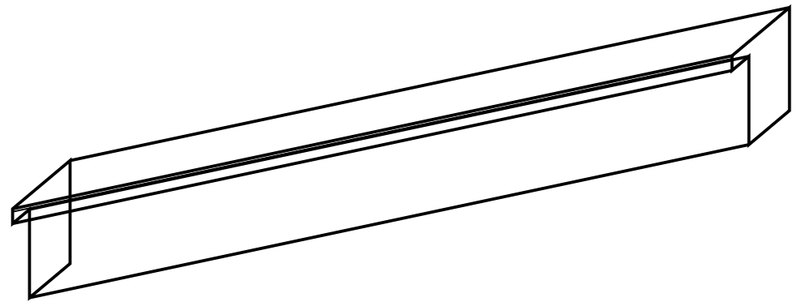

ISOMETRIC VIEW (NOT TO SCALE)

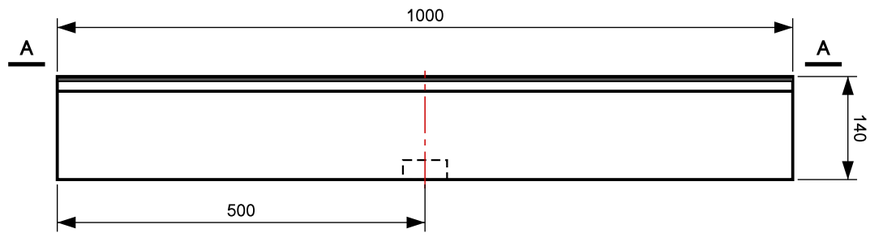

FRONT VIEW (OUTLET SIDE)

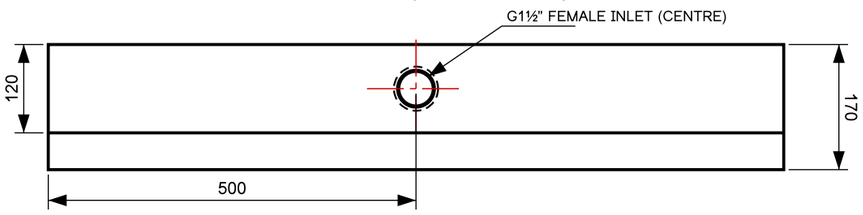

BOTTOM VIEW

NOTES / SPECIFICATION

1. MATERIAL: STAINLESS STEEL SUS316 (AISI 316), t = 1.5 mm THROUGHOUT
2. WATER INLET: SUS316 SOCKET, FEMALE THREAD G1½" (BSPP / Rp1½)
   WELDED TO BOTTOM AT MID-LENGTH (L = 500), QTY 1
3. OVERALL LENGTH 1000 mm INCLUDING END CAPS (t = 1.5)
4. OUTLET SLOT 5 mm GAP × 50 mm DEEP, FULL LENGTH
   LIP STRAIGHT & LEVEL WITHIN ±0.3 mm FOR A SMOOTH SHEET
5. FLOW BAFFLE: PERFORATED Ø6 HOLES @ 15 mm PITCH
6. CONTINUOUS TIG WELD ALL SEAMS, ER316L FILLER, WATERTIGHT
7. EXTERNAL FINISH: HAIRLINE / No.8 MIRROR (PER CLIENT)
   CLEAN WELDS & PASSIVATE AFTER WELDING
8. HYDROSTATIC LEAK TEST 1.5 bar FOR 10 MIN
9. GENERAL TOLERANCE ±1 mm (ISO 2768-m)
10. SUGGESTED PUMP FLOW: APPROX. 6–10 m³/h PER 1 m

WONDER TECHNOLOGY CO., LTD.

PROJECT: **VELRA THONGLOR**	
STAINLESS STEEL 316 WATER CURTAIN L 1000 × 170 × 140 mm • INLET G1½" FEMALE THREAD	
MATERIAL: **SUS316 t = 1.5 mm**	DRAWING No.: **WC-316-1000-01**
SCALE: **AS SHOWN (A3)**	UNITS: **MILLIMETRES (mm)**
QTY: **1 SET**	DATE: **16/10/2026**
DRAWN BY:	CHECKED / APPROVED: .....