


Network Topology

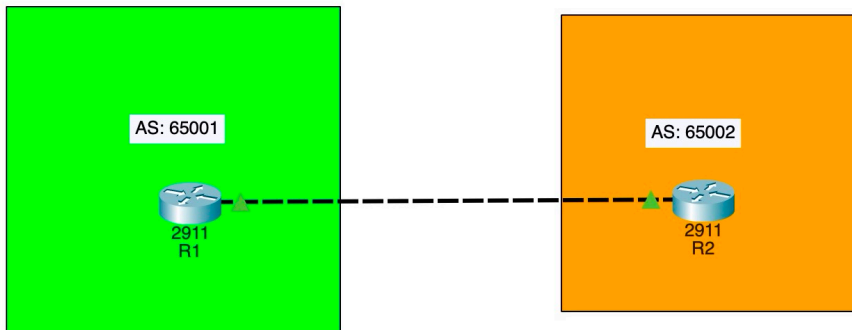

IP Addressing Plan

R1 to R2 - 10.0.12.0/30

Loopback0 on R1 - 192.168.1.1

Loopback0 on R2 - 192.168.2.1

Protocol Configuration

- Configure interfaces and loopback addresses
 - On R1,

```
en
conf t
hostname R1

int gi0/0
ip add 10.0.12.1
255.255.255.252
no sh
exit

int Loopback0
ip add 192.168.1.1
255.255.255.255
exit
```

- On R2,

```
en
conf t
hostname R1

int gi0/0
ip add 10.0.12.2
255.255.255.252
no sh
exit

int Loopback0
ip add 192.168.2.1
255.255.255.255
exit
```

- Configure BGP (do we need to configure loopback for BGP?)
 - On R1,

```
router bgp 65001
  bgp log-neighbor-changes
  neighbor 10.0.12.2
remote-as 65002
  network 192.168.1.1 mask
255.255.255.255
exit
```

- On R2,

■

```
router bgp 65002
  bgp log-neighbor-changes
  neighbor 10.0.12.1 remote-as
65001
  network 192.168.1.2 mask
255.255.255.255
exit
```