

Name: _____

Job Date: _____

Company: _____

Job Reference: _____

Cellular: _____

Roofing System: ☐ TPO ☐ PVC NDL Job: ☐ Yes ☐ No

Email: _____

If NDL, Rep Name: _____

Distributor: _____

Color: ☐ White ☐ Tan ☐ Gray ☐ Slate Gray ☐ Dark Bronze**Note: For multiple sizes and/or colors use additional quote forms. Want to fill out faster? Go online FlashCo.com/Edge-FlashForm****FLASHWRAP® - SPLIT BOOTS****Cylindrical Split Boot**

Qty: _____

Size☐ 1" ☐ 2" ☐ 3"
☐ 4" ☐ 5" ☐ 6"Hose Clamp: ☐ Yes ☐ No

Made to actual size

Square/Rectangle Split Boot

Qty: _____

Size☐ 2"x2"
☐ 4"x4"

Standard corner radius is 1/8"

Conical Split Boot

Qty: _____

Size☐ Bantam .5-1 (1/2"-1")
☐ Welter 1-3 (1"-3")
☐ Middle 3-5 (3"-5")
☐ Cruiser 5-7 (5"-7")
☐ Super 7-9 (7"-9")Hose Clamp: ☐ Yes ☐ No**FLASHJACK™ - CLOSED BOOTS****Conical Boot**

Qty: _____

Size☐ Bantam .5-1 (1/2"-1")
☐ Welter 1-3 (1"-3")
☐ Middle 3-5 (3"-5")
☐ Cruiser 5-7 (5"-7")
☐ Super 7-9 (7"-9")Hose Clamp: ☐ Yes ☐ No**Molded Pipe Seal**

Qty: _____

Size☐ 6 in 1 Pre-Molded Universal
(hose clamp included)

Available in white only

For Custom Sizes:Use Custom Accessories FlashForm, or
use Online FlashForm (FlashCoMfg.com/Edge-FlashForm)**FLASHDRAIN™ - DRAINS****Retrofit Drain**

Qty: _____

Size☐ 2" ☐ 3" ☐ 4"
☐ 5" ☐ 6"Fluted: ☐ Yes ☐ NoTarget Patch: ☐ Yes ☐ No**Scupper (Reinforced)**

Qty: _____

Size☐ 4"W x 4"H x 12"D x 6"F
☐ 6"W x 4"H x 12"D x 6"F
☐ Throughwall ☐ Overflow
Type: ☐ Center ☐ Corner**Drain Boot**

Qty: _____

Size☐ 2" ☐ 3"

Membrane only

Drop Outlet

Qty: _____

Size☐ 2" ☐ 3"

Designed for external drainage

FLASHVENT™ - VENT FLASHINGS**Easy Flapper™**

Qty: _____

Size☐ 4" ☐ 6" ☐ 8"Add Boot: ☐ Yes ☐ No**Sub Base & Boot/Assembly**

Qty: _____

Size☐ 4" ☐ 4" Oval ☐ 6"
☐ 8" ☐ 10" ☐ 12"
☐ Boot ☐ Assembly**Breather Vent**

Qty: _____

Size☐ 4" Round
☐ 8" Square
☐ One Way
☐ Two Way**Gravity Vent**

Qty: _____

Size☐ 12"x12"
☐ 18"x18"
☐ 24"x24"**Louver Vent**

Qty: _____

Size☐ 14" x 18"
☐ 12" x 12"
☐ 14" x 12"**T-Top & Square Top Vents**

Qty: _____

Size☐ 4" T-Top
☐ 6" T-Top
☐ 8" T-Top
☐ 8" Square Top
☐ 4"x12" T-Top Box**Eyebrow Vent**

Qty: _____

Size ☐ 18" ☐ 24"
For 45° - 90° slopes**Wall Vent**

Qty: _____

Size ☐ 12" ☐ 16" ☐ 24"
For 90° applications**FlashCap® Vent Boot**

Qty: _____

Size☐ 1 1/2" ☐ 2"
☐ 3" ☐ 4"**FLASHACCESSORY™ - ACCESSORIES****Coated Metal**

Qty: _____

Size☐ 2"x4"x10'
☐ 3"x3"x10'
☐ 4' x 10' Full Sheet**Sealant Pocket**

Qty: _____

Pre-Fab Size☐ 4"x4" ☐ 6"x6" ☐ 8"x8"**Molded Size**☐ 6" x 6"-12"**Corners**

Qty: _____

Size☐ 6" Inside Corner
☐ 6" Outside Corner
☐ Fluted Outside
☐ Molded Inside/Outside**T-Joint Covers**

Qty: _____ 100/bag

Size☐ 4 1/2" Pre-Fab
☐ 4 1/2" Molded

Name: _____

Job Date: _____

Company: _____

Job Reference: _____

Cellular: _____

Roofing System: ☐ TPO ☐ PVC NDL Job: ☐ Yes ☐ No

Email: _____

If NDL, Rep Name: _____

Distributor: _____

Color: ☐ White ☐ Tan ☐ Gray ☐ Slate Gray ☐ Dark Bronze**Note: For multiple sizes and/or colors use additional quote forms. Want to fill out faster? Go online FlashCo.com/Edge-FlashForm****FLASHWRAP® - SPLIT BOOTS****Cylindrical Split Boot**


Qty: _____

Custom Size

A: Diam. _____ in.

B: Height _____ in. (8" std.)

C: Flange _____ in. (6" std.)

Hose Clamp: ☐ Yes ☐ No**Square/Rect. Split Boot**

Qty: _____

Custom Size


A1: Tube: _____ in.

A2: Tube: _____ in.

B: Height _____ in. (8" std.)

C: Flange _____ in. (6" std.)

R: Radius _____ in. (1/8" std.)

**Conical Split Boot**

Qty: _____


Custom Size

A: Top Dia. _____ in.

D: Btm Dia. _____ in.

B: Height _____ in. (8" std.)

C: Flange _____ in. (6" std.)

Hose Clamp: ☐ Yes ☐ No**FLASHJACK™ - CLOSED BOOTS****Cylindrical Boot**


Qty: _____

Custom Size

A: Diam. _____ in.

B: Height _____ in. (8" std.)

C: Flange _____ in. (6" std.)

Hose Clamp: ☐ Yes ☐ No

Built to size

Square/Rect. Boot

Qty: _____

Custom Size


A1: Tube: _____ in.

A2: Tube: _____ in.

B: Height _____ in. (8" std.)

C: Flange _____ in. (6" std.)

R: Radius _____ in. (1/8" std.)



Built to size

Conical Boot

Qty: _____


Custom Size

A: Top Diam. _____ in.

D: Btm Diam. _____ in.

B: Height _____ in. (8" std.)

C: Flange _____ in. (6" std.)


Hose Clamp: ☐ Yes ☐ No**FLASHDRAIN™ - DRAINS****Scupper****Custom Size**

Qty: _____

W: Width _____ in.

H: Height _____ in.

D: Depth _____ in.

☐ Throughwall ☐ OverflowType: ☐ Center ☐ R. Corner ☐ L. Corner**FLASHACCESSORY™ - ACCESSORIES****Sealant Pocket**


Qty: _____

Custom Size

W: Width _____ in.

L: Length _____ in.

H: Height _____ in. (2" std.)



Split side is along L


Curb Wrap**Configuration**☐ 2 pcs ☐ 4 pcs☐ Split ☐ Closed

A: Dim. _____ in.


B: Dim. _____ in.

H: Height _____ in. (8" & 12" std.)

F: Flange _____ in. (6" std.)

**FLASHEDGE™ - COATED METAL****Drip Edge**

Qty: _____

**Options**☐ No Hem☐ Hem Open☐ Hem Closed

Hem Return _____ in.

Size


A= _____ in.

B= _____ in.

C= _____ deg.

Gravel Stop Drip Edge

Qty: _____

**Options**☐ No Hem☐ Hem Open☐ Hem Closed

Hem Return _____ in.

Size


A= _____ in.

B= _____ in.

C= _____ in.

Cleat

Qty: _____



Cleat fits in Open Hem

Size

C1= _____ in.

C2= _____ in.

C3= _____ in.

Cap Metal

Qty: _____

**Options**☐ No Hem☐ Hem Open☐ Hem Closed


Hem Return _____ in.

Size

A= _____ in. B= _____ in. C= _____ in.

Z Bar

Qty: _____

**Size**


A= _____ in.

B= _____ in.

C= _____ in.

Coated Side: ☐ E ☐ F**Roof To Wall/Starter**

Qty: _____

**Size**

A= _____ in.

B= _____ in.

C= _____ deg.

Coated Side: ☐ E ☐ F

Name: _____ Distributor: _____

Company: _____ Job Name: _____

Cellular: _____ Job Location: _____

Email: _____ Job Date: _____

Choose Options:

Type: ☐ TPO ☐ PVC

Color: ☐ White ☐ Tan ☐ Gray


☐ Other: _____

Talk with your FlashCo Representative for special orders & material availability.

Notes:


- 6" standard reinforced membrane skirt with 3" of weldable flange beyond the tabs
- Standard 3" metal tabs for fastening to wall and deck
- Throat is coated 24g G90 steel

Throughwall Scupper (Center)

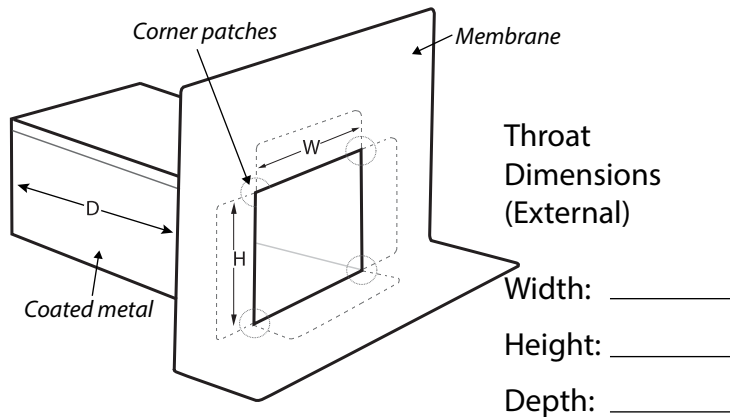


Weldable Memb. Flange (3" std.): _____ Qty. _____

Overflow Scupper

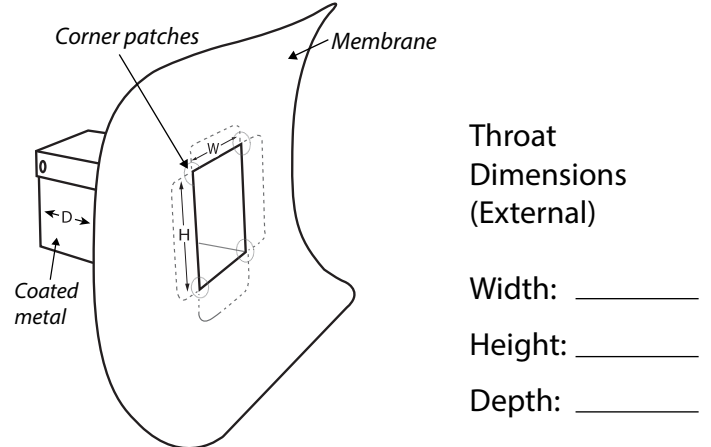


Weldable Memb. Flange (3" std.): _____ Qty. _____

Throughwall Scupper (Left Corner)

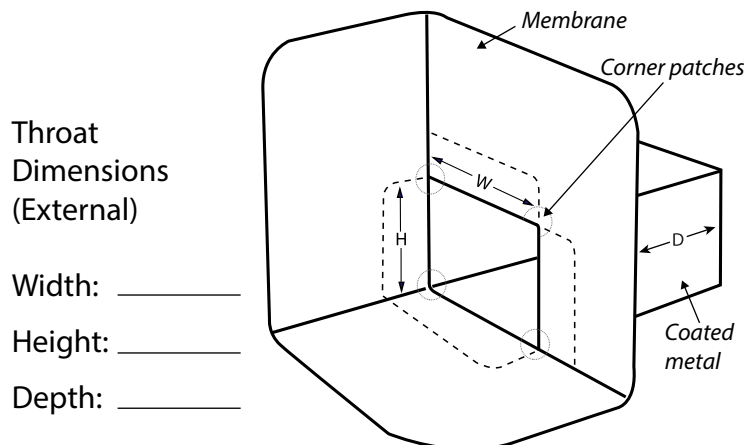

Qty. _____ Weldable Memb. Flange (3" std.): _____

Throughwall Scupper (Right Corner)

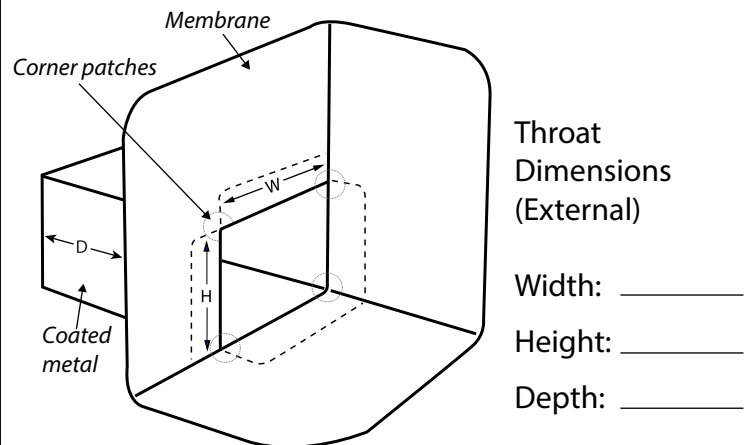

Weldable Memb. Flange (3" std.): _____ Qty. _____

Name: _____ Distributor: _____

Company: _____ Job Name: _____

Cellular: _____ Job City & State: _____

Email: _____ Job Date: _____

Choose Options:

Type: ☐ TPO ☐ PVC

Color: ☐ White ☐ Tan ☐ Gray

☐ Dark Bronze ☐ Slate Gray


☐ Other: _____

Talk with your FlashCo Representative for special orders & material availability.

Notes:

- All lengths of metal are 10' unless otherwise stated.
- Kick and hem are both included in pullout total measurement
- Standard edge is $\frac{3}{8}$ " and 30° away from the vertical.
- Sold in bundles of 10.

Drip Edge

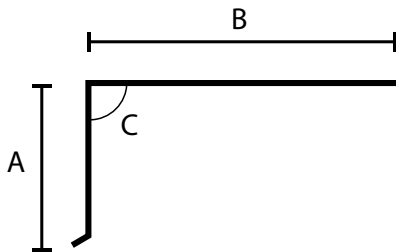

Size

A=_____ in.

B=_____ in.

C=_____ deg.

Options

☐ No Hem


☐ Hem Open

☐ Hem Closed

Quantity

Hem Return _____ in.

Gravel Stop Drip Edge

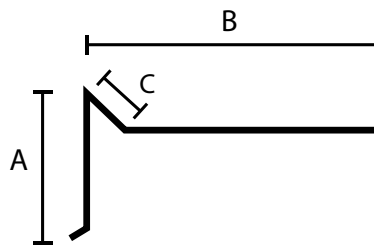

Size

A=_____ in.

B=_____ in.

C=_____ in.

Options

☐ No Hem


☐ Hem Open

☐ Hem Closed

Quantity

Hem Return _____ in.

Cleat

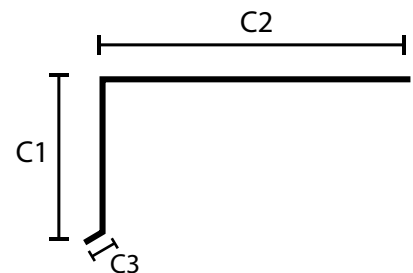

Size

C1=_____ in.


C2=_____ in.

C3=_____ in.

Quantity

Cleat fits in Open Hem

Cap Metal

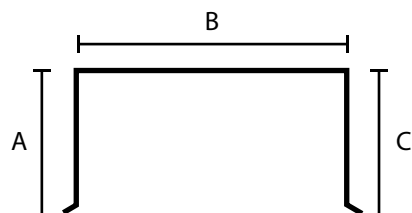

Size

A=_____ in.

B=_____ in.

C=_____ in.

Options

☐ No Hem


☐ Hem Open

☐ Hem Closed

Quantity

Hem Return _____ in.

Z Bar



Size

A=_____ in.

B=_____ in.


C=_____ in.

Quantity

Coated Side:

☐ E ☐ F

Roof To Wall/Starter

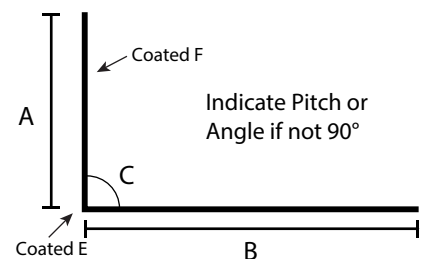

Size

A=_____ in.

B=_____ in.

C=_____ deg.

Quantity

Coated Side:

☐ E ☐ F