Manage insertion delay, skew, slew, fanout, power, and obstacles.

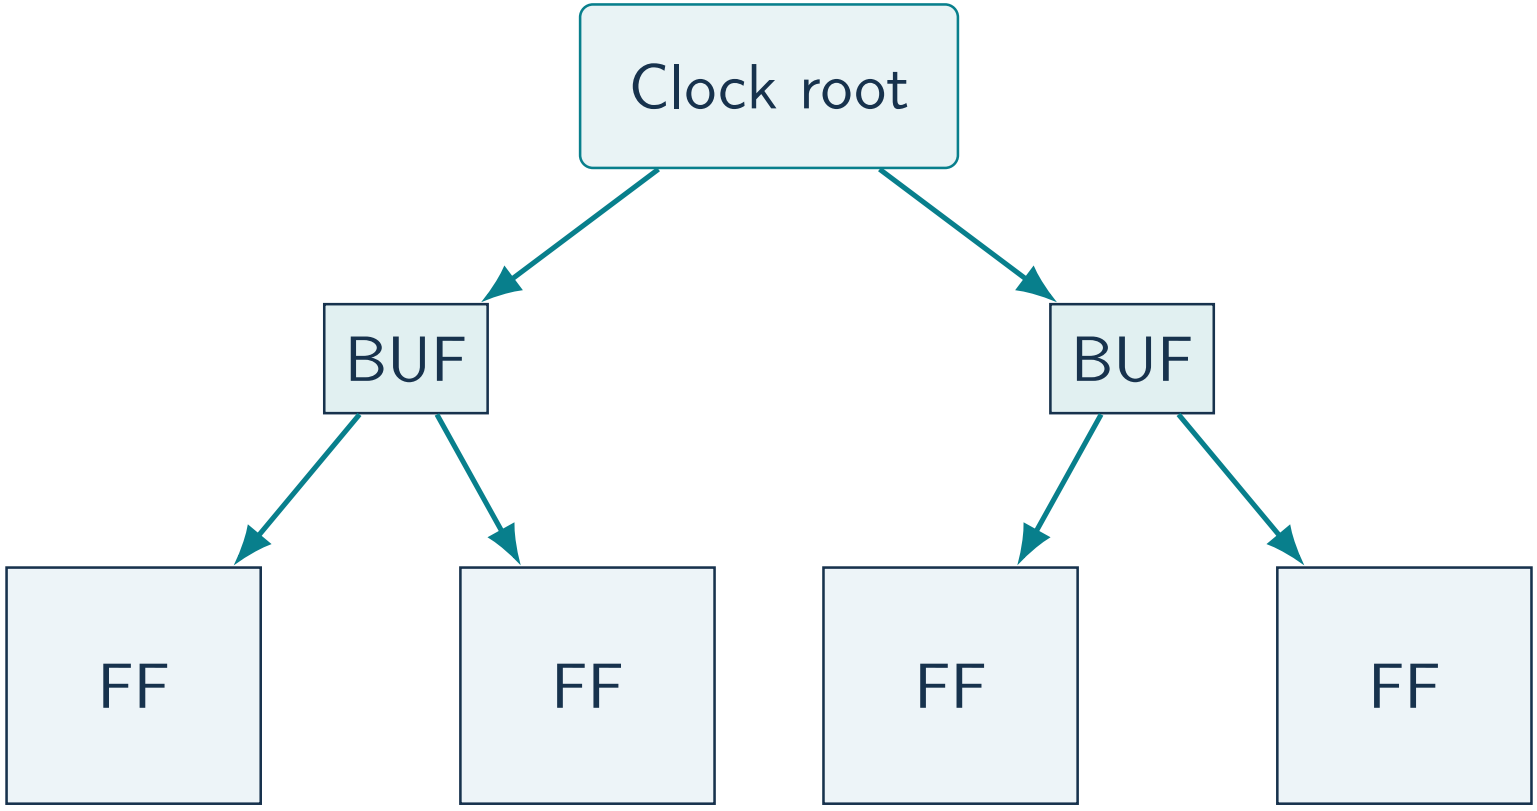

Illustrative sink latencies: 0.20, 0.22, 0.21, 0.23 ns

Global skew spread = 0.03 ns; path-specific skew depends on the sink pair.