











DRV8825

SLVSA73F - APRIL 2010-REVISED JULY 2014

DRV8825 Stepper Motor Controller IC

1 Features

- PWM Microstepping Stepper Motor Driver
 - Built-In Microstepping Indexer
 - Up to 1/32 Microstepping
- Multiple Decay Modes
 - Mixed Decay
 - Slow Decay
 - Fast Decay
- 8.2-V to 45-V Operating Supply Voltage Range
- 2.5-A Maximum Drive Current at 24 V and T_A = 25°C
- Simple STEP/DIR Interface
- Low Current Sleep Mode
- Built-In 3.3-V Reference Output
- Small Package and Footprint
- Protection Features
 - Overcurrent Protection (OCP)
 - Thermal Shutdown (TSD)
 - VM Undervoltage Lockout (UVLO)
 - Fault Condition Indication Pin (nFAULT)

2 Applications

- Automatic Teller Machines
- Money Handling Machines
- · Video Security Cameras
- Printers
- Scanners
- Office Automation Machines
- Gaming Machines
- · Factory Automation
- Robotics

3 Description

The DRV8825 provides an integrated motor driver solution for printers, scanners, and other automated equipment applications. The device has two H-bridge drivers and a microstepping indexer, and is intended to drive a bipolar stepper motor. The output driver block consists of N-channel power MOSFET's configured as full H-bridges to drive the motor windings. The DRV8825 is capable of driving up to 2.5 A of current from each output (with proper heat sinking, at 24 V and 25°C).

A simple STEP/DIR interface allows easy interfacing to controller circuits. Mode pins allow for configuration of the motor in full-step up to 1/32-step modes. Decay mode is configurable so that slow decay, fast decay, or mixed decay can be used. A low-power sleep mode is provided which shuts down internal circuitry to achieve very low quiescent current draw. This sleep mode can be set using a dedicated nSLEEP pin.


Internal shutdown functions are provided for overcurrent, short circuit, under voltage lockout and over temperature. Fault conditions are indicated via the nFAULT pin.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
DRV8825	HTSSOP (28)	9.70 mm × 6.40 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

4 Simplified Schematic

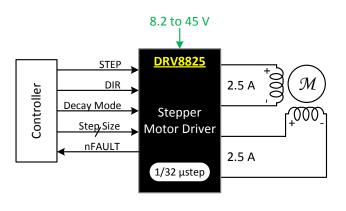

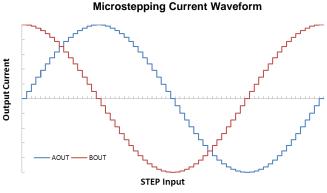




Table of Contents


1	Features 1		8.3 Feature Description	
2	Applications	9	8.4 Device Functional Modes Application and Implementation	
3	Description	9	9.1 Application Information	
4 5	Simplified Schematic 1 Revision History 2		9.2 Typical Application	
6	Pin Configuration and Functions	10	Power Supply Recommendations	21
7	Specifications4		10.1 Bulk Capacitance	
	7.1 Absolute Maximum Ratings 4		10.2 Power Supply and Logic Sequencing	
	7.2 Handling Ratings4	11	Layout	22
	7.3 Recommended Operating Conditions 4		11.1 Layout Guidelines	<mark>22</mark>
	7.4 Thermal Information		11.2 Layout Example	<mark>22</mark>
	7.5 Electrical Characteristics 6		11.3 Thermal Protection	<mark>22</mark>
	7.6 Timing Requirements	12	Device and Documentation Support	24
	7.7 Typical Characteristics 8		12.1 Trademarks	24
8	Detailed Description9		12.2 Electrostatic Discharge Caution	24
O			12.3 Glossary	
	8.1 Overview	13	Mechanical, Packaging, and Orderable	
	0.2 Turiotional blook blagfam		Information	24

5 Revision History

CI	hanges from Revision E (August 2013) to Revision F	Page
•	Added new sections and reordered data sheet to fit new TI flow	1
•	Updated pin descriptions	3
•	Added power supply ramp rate and updated ISENSEx pin voltage in Absolute Maximum Ratings	4
•	Updated V _{IL} voltage minimum and typical in <i>Electrical Characteristics</i>	6
•	Updated I _{IN} and t _{DEG} in <i>Electrical Characteristics</i>	6



6 Pin Configuration and Functions

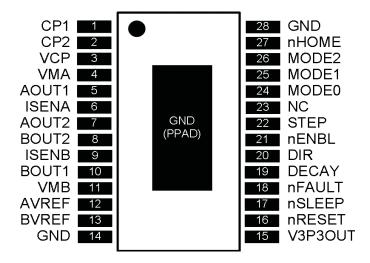

Pin Functions

PIN		I/O ⁽¹⁾	DESCRIPTION	EXTERNAL COMPONENTS		
NAME	NO.	1/0(*)	DESCRIPTION	OR CONNECTIONS		
POWER AN	ID GROUN	D				
CP1	1	I/O	Charge pump flying capacitor	Connect a 0.01 UF FO V connector between CD1 and CD2		
CP2	2	I/O	Charge pump flying capacitor	Connect a 0.01-µF 50-V capacitor between CP1 and CP2.		
GND	14, 28	_	Device ground			
VCP	3	I/O	High-side gate drive voltage	Connect a 0.1- μF 16-V ceramic capacitor and a 1-M Ω resistor to VM.		
VMA	4	_	Bridge A power supply	Connect to motor supply (8.2 to 45 V). Both pins must be		
VMB	11	_	Bridge B power supply	connected to the same supply, bypassed with a 0.1-µF capacitor to GND, and connected to appropriate bulk capacitance.		
V3P3OUT	15	0	3.3-V regulator output	Bypass to GND with a 0.47-μF 6.3-V ceramic capacitor. Can be used to supply VREF.		
CONTROL						
AVREF	12	I	Bridge A current set reference input	Reference voltage for winding current set. Normally AVREF and		
BVREF	13	I	Bridge B current set reference input	BVREF are connected to the same voltage. Can be connected to V3P3OUT.		
DECAY	19	I	Decay mode	Low = slow decay, open = mixed decay, high = fast decay. Internal pulldown and pullup.		
DIR	20	I	Direction input	Level sets the direction of stepping. Internal pulldown.		
MODE0	24	I	Microstep mode 0			
MODE1	25	I	Microstep mode 1	MODE0 through MODE2 set the step mode - full, 1/2, 1/4, 1/8/ 1/16, or 1/32 step. Internal pulldown.		
MODE2	26	ı	Microstep mode 2	, re, et yez etep menai panaemi		
NC	23	_	No connect	Leave this pin unconnected.		
nENBL	21	I	Enable input	Logic high to disable device outputs and indexer operation, logic low to enable. Internal pulldown.		
nRESET	16	I	Reset input	Active-low reset input initializes the indexer logic and disables the H-bridge outputs. Internal pulldown.		
nSLEEP	17	I	Sleep mode input	Logic high to enable device, logic low to enter low-power sleep mode. Internal pulldown.		
STEP	22	I	Step input	Rising edge causes the indexer to move one step. Internal pulldown.		
STATUS						
nFAULT	18	OD	Fault	Logic low when in fault condition (overtemp, overcurrent)		

(1) Directions: I = input, O = output, OD = open-drain output, IO = input/output

Submit Documentation Feedback



Pin Functions (continued)

PII	PIN		PIN I/O		DESCRIPTION	EXTERNAL COMPONENTS	
NAME	NO.	1/0 (/	DESCRIPTION	OR CONNECTIONS			
nHOME	27	OD	Home position	Logic low when at home state of step table			
OUTPUT							
AOUT1	5	0	Bridge A output 1	Connect to bipolar stepper motor winding A.			
AOUT2	7	0	Bridge A output 2	Positive current is AOUT1 → AOUT2			
BOUT1	10	0	Bridge B output 1	Connect to bipolar stepper motor winding B.			
BOUT2	8	0	Bridge B output 2	Positive current is BOUT1 → BOUT2			
ISENA	6	I/O	Bridge A ground / Isense	Connect to current sense resistor for bridge A.			
ISENB	9	I/O	Bridge B ground / Isense	Connect to current sense resistor for bridge B.			

7 Specifications

7.1 Absolute Maximum Ratings⁽¹⁾⁽²⁾

		MIN	MAX	UNIT
.,	Power supply voltage	-0.3	47	V
$V_{(VMx)}$	Power supply ramp rate		1	V/µs
	Digital pin voltage	-0.5	7	V
V _(xVREF)	Input voltage	-0.3	4	V
	ISENSEx pin voltage (3)	-0.8	0.8	V
	Peak motor drive output current, t < 1 μs	Inter	nally limited	Α
	Continuous motor drive output current ⁽⁴⁾	0	2.5	Α
	Continuous total power dissipation	See Therma	I Information	
TJ	Operating junction temperature range	-40	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- (2) All voltage values are with respect to network ground terminal.
- (3) Transients of ±1 V for less than 25 ns are acceptable
- (4) Power dissipation and thermal limits must be observed.

7.2 Handling Ratings

			MIN	MAX	UNIT
T _{stg}	Storage tempe	erature range	-60	150	°C
V	Electrostatic	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	-2000	2000	
V _(ESD)	discharge	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	-500	500	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

		MIN	NOM MAX	UNIT
$V_{(VMx)}$	Motor power supply voltage range ⁽¹⁾	8.2	45	V
V _(VREF)	VREF input voltage ⁽²⁾	1	3.5	V
I _{V3P3}	V3P3OUT load current	0	1	mA

(1) All V_M pins must be connected to the same supply voltage.

(2) Operational at VREF between 0 to 1 V, but accuracy is degraded.



7.4 Thermal Information

		DRV8825	
	THERMAL METRIC ⁽¹⁾	PWP	UNIT
		28 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance (2)	31.6	
R _{0JC(top)}	Junction-to-case (top) thermal resistance (3)	15.9	
$R_{\theta JB}$	Junction-to-board thermal resistance (4)	5.6	9000
ΨЈТ	Junction-to-top characterization parameter ⁽⁵⁾	0.2	°C/W
ΨЈВ	Junction-to-board characterization parameter ⁽⁶⁾	5.5	
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance (7)	1.4	

- (1) For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.
- (2) The junction-to-ambient thermal resistance under natural convection is obtained in a simulation on a JEDEC-standard, high-K board, as specified in JESD51-7, in an environment described in JESD51-2a.
- (3) The junction-to-case (top) thermal resistance is obtained by simulating a cold plate test on the package top. No specific JEDEC-standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.
- (4) The junction-to-board thermal resistance is obtained by simulating in an environment with a ring cold plate fixture to control the PCB temperature, as described in JESD51-8.
- (5) The junction-to-top characterization parameter, ψ_{JT}, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining θ_{JA}, using a procedure described in JESD51-2a (sections 6 and 7).
- (6) The junction-to-board characterization parameter, ψ_{JB} , estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining θ_{JA} , using a procedure described in JESD51-2a (sections 6 and 7).
- (7) The junction-to-case (bottom) thermal resistance is obtained by simulating a cold plate test on the exposed (power) pad. No specific JEDEC standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.



7.5 Electrical Characteristics

over operating free-air temperature range of -40°C to 85°C (unless otherwise noted)

	PARAMETER	ge of –40°C to 85°C (unless otherwise noted) TEST CONDITIONS	MIN	TYP	MAX	UNIT
POWER	SUPPLIES					
I _{VM}	VM operating supply current	V _(VMx) = 24 V		5	8	mA
I _{VMQ}	VM sleep mode supply current	V _(VMx) = 24 V		10	20	μA
	JT REGULATOR	(VIIIX)				
V _{3P3}	V3P3OUT voltage	IOUT = 0 to 1 mA	3.2	3.3	3.4	V
	LEVEL INPUTS					
V _{IL}	Input low voltage		0		0.7	V
V _{IH}	Input high voltage		2.2		5.25	V
V _{HYS}	Input hysteresis		0.3	0.45	0.6	V
I _{IL}	Input low current	VIN = 0	-20		20	μA
I _{IH}	Input high current	VIN = 3.3 V			100	μA
R _{PD}	Internal pulldown resistance			100		kΩ
	, nFAULT OUTPUTS (OPEN-DRAI	N OUTPUTS)				
V _{OL}	Output low voltage	I _O = 5 mA			0.5	V
I _{OH}	Output high leakage current	V _O = 3.3 V			1	μA
DECAY	, , ,	0				
V _{IL}	Input low threshold voltage	For slow decay mode			0.8	V
V _{IH}	Input high threshold voltage	For fast decay mode	2			V
I _{IN}	Input current	,	-40		40	μA
R _{PU}	Internal pullup resistance (to 3.3 V)			130		kΩ
R _{PD}	Internal pulldown resistance			80		kΩ
	GE FETS					
		V _(VMx) = 24 V, I _O = 1 A, T _J = 25°C		0.2		
_	HS FET on resistance	V _(VMx) = 24 V, I _O = 1 A, T _J = 85°C		0.25	0.32	
R _{DS(ON)}		$V_{(VMX)} = 24 \text{ V}, I_O = 1 \text{ A}, T_J = 25^{\circ}\text{C}$		0.2		Ω
	LS FET on resistance	V _(VMx) = 24 V, I _O = 1 A, T _J = 85°C		0.25	0.32	
I _{OFF}	Off-state leakage current	(1)	-20		20	μA
MOTOR	DRIVER		- "			
f_{PWM}	Internal current control PWM frequency			30		kHz
t _{BLANK}	Current sense blanking time			4		μs
t _R	Rise time		30		200	ns
t _F	Fall time		30		200	ns
	CTION CIRCUITS					
V _{UVLO}	VM undervoltage lockout voltage	V _(VMx) rising		7.8	8.2	V
I _{OCP}	Overcurrent protection trip level	(Timy)	3			Α
t _{DEG}	Overcurrent deglitch time			3		μs
t _{TSD}	Thermal shutdown temperature	Die temperature	150	160	180	°C
	NT CONTROL		1			
I _{REF}	xVREF input current	$V_{(XVREF)} = 3.3 \text{ V}$	-3		3	μA
V _{TRIP}	xISENSE trip voltage	$V_{(XVREF)} = 3.3 \text{ V}, 100\% \text{ current setting}$	635	660	685	mV
		V _(xVREF) = 3.3 V, 5% current setting	-25%		25%	
	Current trip accuracy	$V_{(XVREF)} = 3.3 \text{ V}$, 10% to 34% current setting	-15%		15%	
ΔI_{TRIP}	(relative to programmed value)	$V_{(XVREF)} = 3.3 \text{ V}, 38\% \text{ to } 67\% \text{ current setting}$	-10%		10%	
		$V_{(XVREF)} = 3.3 \text{ V}$, 71% to 100% current setting	-5%		5%	
A _{ISENSE}	Current sense amplifier gain	Reference only		5		V/V



7.6 Timing Requirements

			MIN	MAX	UNIT
1	f_{STEP}	Step frequency		250	kHz
2	t _{WH(STEP)}	Pulse duration, STEP high	1.9		μs
3	t _{WL(STEP)}	Pulse duration, STEP low	1.9		μs
4	t _{SU(STEP)}	Setup time, command before STEP rising	650		ns
5	t _{H(STEP)}	Hold time, command after STEP rising	650		ns
6	t _{ENBL}	Enable time, nENBL active to STEP	650		ns
7	t _{WAKE}	Wakeup time, nSLEEP inactive high to STEP input accepted		1.7	ms


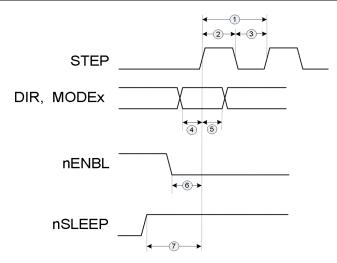


Figure 1. Timing Diagram



7.7 Typical Characteristics



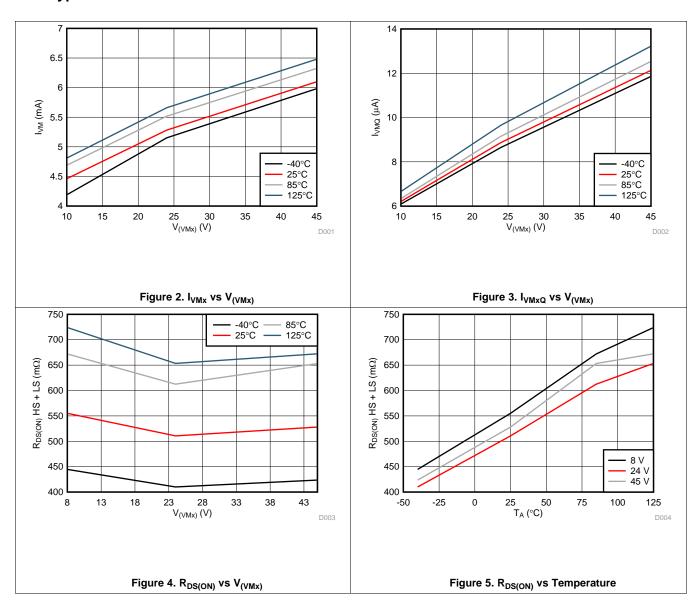

8 Detailed Description

8.1 Overview

The DRV8825 is an integrated motor driver solution for bipolar stepper motors. The device integrates two NMOS H-bridges, current sense, regulation circuitry, and a microstepping indexer. The DRV8825 can be powered with a supply voltage between 8.2 and 45 V and is capable of providing an output current up to 2.5 A full-scale.


A simple STEP/DIR interface allows for easy interfacing to the controller circuit. The internal indexer is able to execute high-accuracy microstepping without requiring the processor to control the current level.

The current regulation is highly configurable, with three decay modes of operation. Depending on the application requirements, the user can select fast, slow, and mixed decay.

A low-power sleep mode is included which allows the system to save power when not driving the motor.



8.2 Functional Block Diagram

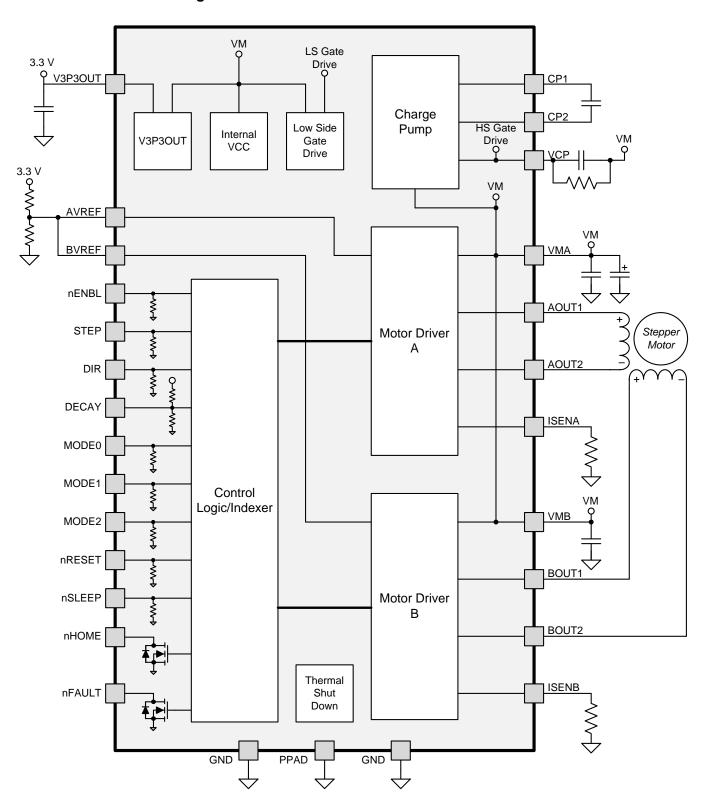

Submit Documentation Feedback



8.3 Feature Description

8.3.1 PWM Motor Drivers

The DRV8825 contains two H-bridge motor drivers with current-control PWM circuitry. Figure 6 shows a block diagram of the motor control circuitry.

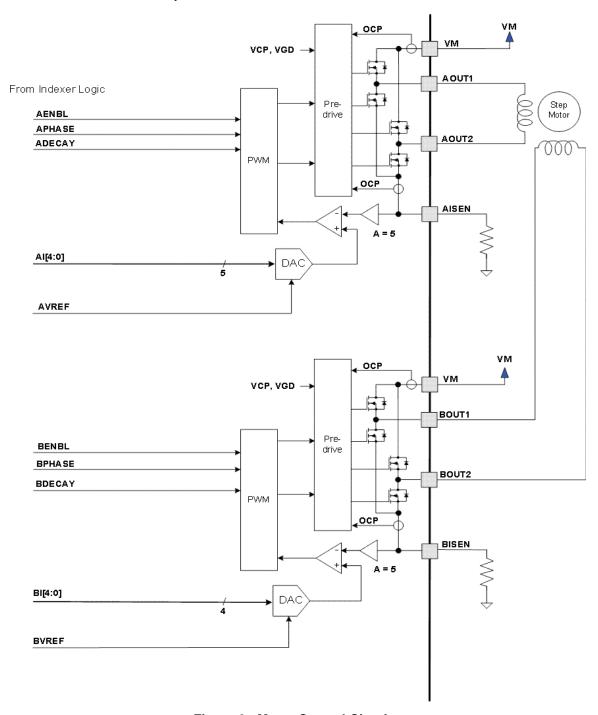


Figure 6. Motor Control Circuitry

Note that there are multiple VM motor power supply pins. All VM pins must be connected together to the motor supply voltage.



Feature Description (continued)

8.3.2 Current Regulation

The current through the motor windings is regulated by a fixed-frequency PWM current regulation, or current chopping. When an H-bridge is enabled, current rises through the winding at a rate dependent on the DC voltage and inductance of the winding. Once the current hits the current chopping threshold, the bridge disables the current until the beginning of the next PWM cycle.

In stepping motors, current regulation is used to vary the current in the two windings in a semi-sinusoidal fashion to provide smooth motion.

The PWM chopping current is set by a comparator which compares the voltage across a current sense resistor connected to the xISEN pins, multiplied by a factor of 5, with a reference voltage. The reference voltage is input from the xVREF pins.

The full-scale (100%) chopping current is calculated in Equation 1.

$$I_{CHOP} = \frac{V_{(xREF)}}{5 \times R_{ISENSE}}$$
 (1)

Example:

If a $0.25-\Omega$ sense resistor is used and the VREFx pin is 2.5 V, the full-scale (100%) chopping current will be 2.5 V / (5 x 0.25 Ω) = 2 A.

The reference voltage is scaled by an internal DAC that allows fractional stepping of a bipolar stepper motor, as described in the microstepping indexer section below.

8.3.3 Decay Mode

During PWM current chopping, the H-bridge is enabled to drive current through the motor winding until the PWM current chopping threshold is reached. This is shown in Figure 7 as case 1. The current flow direction shown indicates positive current flow.

Once the chopping current threshold is reached, the H-bridge can operate in two different states, fast decay or slow decay.

In fast decay mode, once the PWM chopping current level has been reached, the H-bridge reverses state to allow winding current to flow in a reverse direction. As the winding current approaches 0, the bridge is disabled to prevent any reverse current flow. Fast decay mode is shown in Figure 7 as case 2.

In slow decay mode, winding current is recirculated by enabling both of the low-side FETs in the bridge. This is shown in Figure 7 as case 3.



Feature Description (continued)

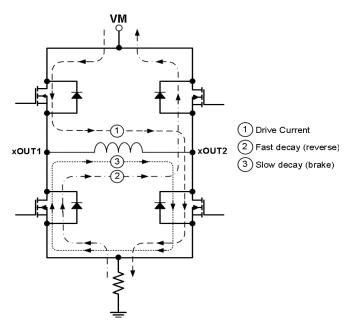


Figure 7. Decay Mode

The DRV8825 supports fast decay, slow decay and a mixed decay mode. Slow, fast, or mixed decay mode is selected by the state of the DECAY pin; logic low selects slow decay, open selects mixed decay operation, and logic high sets fast decay mode. The DECAY pin has both an internal pullup resistor of approximately 130 k Ω and an internal pulldown resistor of approximately 80 k Ω . This sets the mixed decay mode if the pin is left open or undriven.

Mixed decay mode begins as fast decay, but at a fixed period of time (75% of the PWM cycle) switches to slow decay mode for the remainder of the fixed PWM period. This occurs only if the current through the winding is decreasing (per the indexer step table); if the current is increasing, then slow decay is used.

8.3.4 Blanking Time

After the current is enabled in an H-bridge, the voltage on the xISEN pin is ignored for a fixed period of time before enabling the current sense circuitry. This blanking time is fixed at $3.75 \,\mu s$. Note that the blanking time also sets the minimum on time of the PWM.

8.3.5 Microstepping Indexer

Built-in indexer logic in the DRV8825 allows a number of different stepping configurations. The MODE0 through MODE2 pins are used to configure the stepping format as shown in Table 1.

Table 1. Stepping Format

MODE2	MODE1	MODE0	STEP MODE
0	0	0	Full step (2-phase excitation) with 71% current
0	0	1	1/2 step (1-2 phase excitation)
0	1	0	1/4 step (W1-2 phase excitation)
0	1	1	8 microsteps/step
1	0	0	16 microsteps/step
1	0	1	32 microsteps/step
1	1	0	32 microsteps/step
1	1	1	32 microsteps/step



Table 2 shows the relative current and step directions for different settings of MODEx. At each rising edge of the STEP input, the indexer travels to the next state in the table. The direction is shown with the DIR pin high; if the DIR pin is low the sequence is reversed. Positive current is defined as xOUT1 = positive with respect to xOUT2.

Note that if the step mode is changed while stepping, the indexer will advance to the next valid state for the new MODEx setting at the rising edge of STEP.

The home state is 45°. This state is entered at power-up or application of nRESET. This is shown in Table 2 by the shaded cells. The logic inputs DIR, STEP, nRESET, and MODEx have internal pulldown resistors of 100 k Ω .

Table 2. Relative Current and Step Directions

1/32 STEP	1/16 STEP	1/8 STEP	1/4 STEP	1/2 STEP	FULL STEP	WINDING	WINDING	ELECTRICAL	
					70%	CURRENT A	CURRENT B	ANGLE	
1	1	1	1	1		100%	0%	0	
2						100%	5%	3	
3	2					100%	10%	6	
4						99%	15%	8	
5	3	2				98%	20%	11	
6						97%	24%	14	
7	4					96%	29%	17	
8						94%	34%	20	
9	5	3	2			92%	38%	23	
10						90%	43%	25	
11	6					88%	47%	28	
12						86%	51%	31	
13	7	4				83%	56%	34	
14						80%	60%	37	
15	8					77%	63%	39	
16						74%	67%	42	
17	9	5	3	2	1	71%	71%	45	
18						67%	74%	48	
19	10					63%	77%	51	
20						60%	80%	53	
21	11	6				56%	83%	56	
22						51%	86%	59	
23	12					47%	88%	62	
24						43%	90%	65	
25	13	7	4			38%	92%	68	
26						34%	94%	70	
27	14					29%	96%	73	
28						24%	97%	76	
29	15	8				20%	98%	79	
30						15%	99%	82	
31	16					10%	100%	84	
32	-					5%	100%	87	
33	17	9	5	3		0%	100%	90	
34		-	-	-		-5%	100%	93	
35	18					-10%	100%	96	
36	-					-15%	99%	98	
37	19	10				-20%	98%	101	
38	-	-	-24%		97%	104			
39	20					-29%	96%	107	



Table 2. Relative Current and Step Directions (continued)

Table 2. Relative Current and Step Directions (continued)											
1/32 STEP	1/16 STEP	1/8 STEP	1/4 STEP	1/2 STEP	FULL STEP 70%	WINDING CURRENT A	WINDING CURRENT B	ELECTRICAL ANGLE			
40						-34%	94%	110			
41	21	11	6			-38%	92%	113			
42						-43%	90%	115			
43	22					-47%	88%	118			
44						-51%	86%	121			
45	23	12				-56%	83%	124			
46						-60%	80%	127			
47	24					-63%	77%	129			
48						-67%	74%	132			
49	25	13	7	4	2	-71%	71%	135			
50						-74%	67%	138			
51	26					-77%	63%	141			
52						-80%	60%	143			
53	27	14				-83%	56%	146			
54						-86%	51%	149			
55	28					-88%	47%	152			
56						-90%	43%	155			
57	29	15	8			-92%	38%	158			
58						-94%	34%	160			
59	30					-96%	29%	163			
60						-97%	24%	166			
61	31	16				-98%	20%	169			
62						-99%	15%	172			
63	32					-100%	10%	174			
64	02					-100%	5%	177			
65	33	17	9	5		-100%	0%	180			
66	00					-100%	-5%	183			
67	34					-100%	-10%	186			
68	01					-99%	-15%	188			
69	35	18				-98%	-20%	191			
70	00	10				-97%	-24%	194			
71	36					-96%	-29%	197			
72	30					-94%	-34%	200			
73	37	19	10			-94 <i>%</i> -92%	-34 <i>%</i> -38%	200			
74	31	19	10			-92% -90%	-36% -43%	205			
75	38					-90% -88%	-43% -47%	203			
76	30					-86% -86%	-47 % -51%	211			
77	39	20				-83%	-51% -56%	211			
78	38	20				-83% -80%	-56% -60%	214			
78	40					-80% -77%	-60% -63%	217			
	40						-63% -67%				
80	11	24	11	6	3	-74% -71%	-67% -71%	222			
81	41	21	11	6	ა			225			
82	40					-67%	-74%	228			
83	42					-63%	-77%	231			
84	40	00				-60%	-80%	233			
85	43	22				-56%	-83%	236			
86	1					-51%	-86%	239			

Submit Documentation Feedback



Table 2. Relative Current and Step Directions (continued)

4/00 0750	4440 0777				FULL STEP	WINDING	WINDING	ELECTRICAL
1/32 STEP	1/16 STEP	1/8 STEP	1/4 STEP	1/2 STEP	70%	CURRENT A	CURRENT B	ANGLE
87	44					-47%	-88%	242
88					-43% -90%		245	
89	45	23	12	12 –38%		-38%	-92%	248
90						-34%	-94%	250
91	46					-29%	-96%	253
92						-24%	-97%	256
93	47	24				-20%	-98%	259
94						-15%	-99%	262
95	48					-10%	-100%	264
96						-5%	-100%	267
97	49	25	13	7		0%	-100%	270
98						5%	-100%	273
99	50					10%	-100%	276
100						15%	-99%	278
101	51	26				20%	-98%	281
102						24%	-97%	284
103	52					29%	-96%	287
104						34%	-94%	290
105	53	27	14			38%	-92%	293
106						43%	-90%	295
107	54					47%	-88%	298
108						51%	-86%	301
109	55	28				56%	-83%	304
110						60%	-80%	307
111	56					63%	-77%	309
112						67%	-74%	312
113	57	29	15	8	4	71%	-71%	315
114						74%	-67%	318
115	58					77%	-63%	321
116						80%	-60%	323
117	59	30				83%	-56%	326
118						86%	-51%	329
119	60					88%	-47%	332
120						90%	-43%	335
121	61	31	16			92%	-38%	338
122			. •			94%	-34%	340
123	62					96%	-29%	343
124		02			97%	-24%	346	
125	63	32					-20%	349
126	- 50	<u> </u>		99%		-15%	352	
127	64	100%		-10%	354			
128	<u> </u>					100%	-5%	357

Product Folder Links: DRV8825

Diffit Documentation Feedback



8.3.6 nRESET, nENBL, and nSLEEP Operation

The nRESET pin, when driven active low, resets internal logic, and resets the step table to the home position. It also disables the H-bridge drivers. The STEP input is ignored while nRESET is active.

The nENBL pin is used to control the output drivers and enable/disable operation of the indexer. When nENBL is low, the output H-bridges are enabled, and rising edges on the STEP pin are recognized. When nENBL is high, the H-bridges are disabled, the outputs are in a high-impedance state, and the STEP input is ignored.

Driving nSLEEP low will put the device into a low power sleep state. In this state, the H-bridges are disabled, the gate drive charge pump is stopped, the V3P3OUT regulator is disabled, and all internal clocks are stopped. In this state all inputs are ignored until nSLEEP returns inactive high. When returning from sleep mode, some time (approximately 1 ms) needs to pass before applying a STEP input, to allow the internal circuitry to stabilize. Note that nRESET and nENABL have internal pulldown resistors of approximately 100 k Ω . The nSLEEP pin has an internal pulldown resistor of 1 M Ω . nSLEEP and nRESET signals need to be driven to logic high for device operation.

8.3.7 Protection Circuits

The DRV8825 is fully protected against undervoltage, overcurrent, and overtemperature events.

8.3.7.1 Overcurrent Protection (OCP)

An analog current limit circuit on each FET limits the current through the FET by removing the gate drive. If this analog current limit persists for longer than the OCP time, all FETs in the H-bridge will be disabled and the nFAULT pin will be driven low. The device remains disabled until either nRESET pin is applied, or VM is removed and reapplied.

Overcurrent conditions on both high-side and low-side devices; that is, a short to ground, supply, or across the motor winding all result in an overcurrent shutdown. Note that overcurrent protection does not use the current sense circuitry used for PWM current control, and is independent of the I_{SENSE} resistor value or xVREF voltage.

8.3.7.2 Thermal Shutdown (TSD)

If the die temperature exceeds safe limits, all FETs in the H-bridge will be disabled and the nFAULT pin will be driven low. After the die temperature has fallen to a safe level, operation automatically resumes.

8.3.7.3 Undervoltage Lockout (UVLO)

If at any time the voltage on the VM pins falls below the UVLO threshold voltage, all circuitry in the device will be disabled and internal logic will be reset. Operation will resume when $V_{(VMx)}$ rises above the UVLO threshold.

8.4 Device Functional Modes

8.4.1 STEP/DIR Interface

The STEP/DIR interface provides a simple method for advancing through the indexer table. For each rising edge on the STEP pin, the indexer travels to the next state in the table. The direction it moves in the table is determined by the input to the DIR pin. The signals applied to the STEP and DIR pins should not violate the timing diagram specified in Figure 1.

8.4.2 Microstepping

The microstepping indexer allows for a variety of stepping configurations. The state of the indexer is determined by the configuration of the three MODE pins (refer to Table 1 for configuration options). The DRV8825 supports full step up to 1/32 microstepping.




9 Application and Implementation

9.1 Application Information

The DRV8825 is used in bipolar stepper control. The microstepping motor driver provides additional precision and a smooth rotation from the stepper motor. The following design is a common application of the DRV8825.

9.2 Typical Application

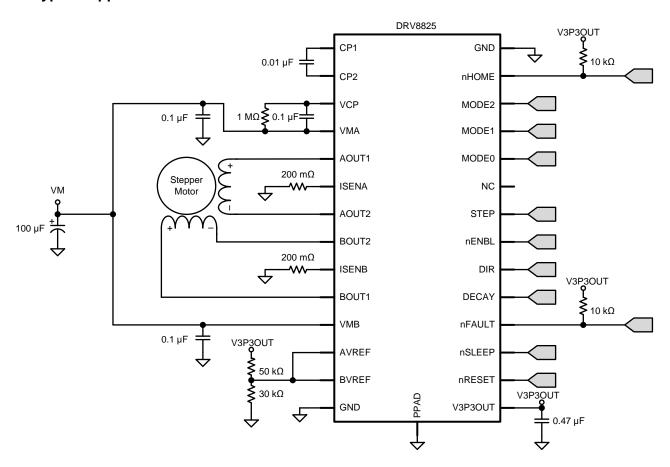

9.2.1 Design Requirements

Design Parameter	Reference	Example Value
Supply Voltage	VM	24 V
Motor Winding Resistance	RL	3.9 Ω
Motor Winding Inductance	IL	2.9 mH
Motor Full Step Angle	θstep	1.8°/step
Target Microstepping Level	nm	8 µsteps per step
Target Motor Speed	V	120 rpm
Target Full-Scale Current	IFS	1.25 A

9.2.2 Detailed Design Procedure

9.2.2.1 Stepper Motor Speed

The first step in configuring the DRV8825 requires the desired motor speed and microstepping level. If the target application requires a constant speed, then a square wave with frequency $f_{\rm step}$ must be applied to the STEP pin.



If the target motor startup speed is too high, the motor will not spin. Make sure that the motor can support the target speed or implement an acceleration profile to bring the motor up to speed.

For a desired motor speed (v), microstepping level (n_m), and motor full step angle (θ_{step}),

$$f_{\text{step}} \text{ (}\mu\text{steps / sec ond)} = \frac{v \left(\frac{\text{rotations}}{\text{minute}} \right) \times 360 \left(\frac{\circ}{\text{rotation}} \right) \times n_{\text{m}} \left(\frac{\mu\text{steps}}{\text{step}} \right)}{60 \left(\frac{\text{sec onds}}{\text{minute}} \right) \times \theta_{\text{step}} \left(\frac{\circ}{\text{step}} \right)}$$
(2)

$$f_{\text{step}} \text{ (}\mu\text{steps / sec ond)} = \frac{120 \left(\frac{\text{rotations}}{\text{minute}}\right) \times 360 \left(\frac{\circ}{\text{rotation}}\right) \times 8 \left(\frac{\mu\text{steps}}{\text{step}}\right)}{60 \left(\frac{\text{sec onds}}{\text{minute}}\right) \times 1.8 \left(\frac{\circ}{\text{step}}\right)}$$
(3)

 θ_{step} can be found in the stepper motor data sheet or written on the motor itself.

For the DRV8825, the microstepping level is set by the MODE pins and can be any of the settings in Table 1. Higher microstepping will mean a smoother motor motion and less audible noise, but will increase switching losses and require a higher f_{step} to achieve the same motor speed.

9.2.2.2 Current Regulation

In a stepper motor, the set full-scale current (I_{FS}) is the maximum current driven through either winding. This quantity depends on the xVREF analog voltage and the sense resistor value (R_{SENSE}). During stepping, I_{FS} defines the current chopping threshold (I_{TRIP}) for the maximum current step. The gain of DRV8825 is set for 5 V/V.

$$I_{FS}(A) = \frac{xVREF(V)}{A_v \times R_{SENSE}(\Omega)} = \frac{xVREF(V)}{5 \times R_{SENSE}(\Omega)}$$
(4)

To achieve $I_{FS} = 1.25$ A with R_{SENSE} of 0.2 Ω , xVREF should be 1.25 V.


9.2.2.3 Decay Modes

The DRV8825 supports three different decay modes: slow decay, fast decay, and mixed decay. The current through the motor windings is regulated using a fixed-frequency PWM scheme. This means that after any drive phase, when a motor winding current has hit the current chopping threshold (I_{TRIP}), the DRV8825 will place the winding in one of the three decay modes until the PWM cycle has expired. Afterward, a new drive phase starts.

The blanking time, t_{BLANK}, defines the minimum drive time for the current chopping. I_{TRIP} is ignored during t_{BLANK}, so the winding current may overshoot the trip level.

TEXAS INSTRUMENTS

9.2.3 Application Curves

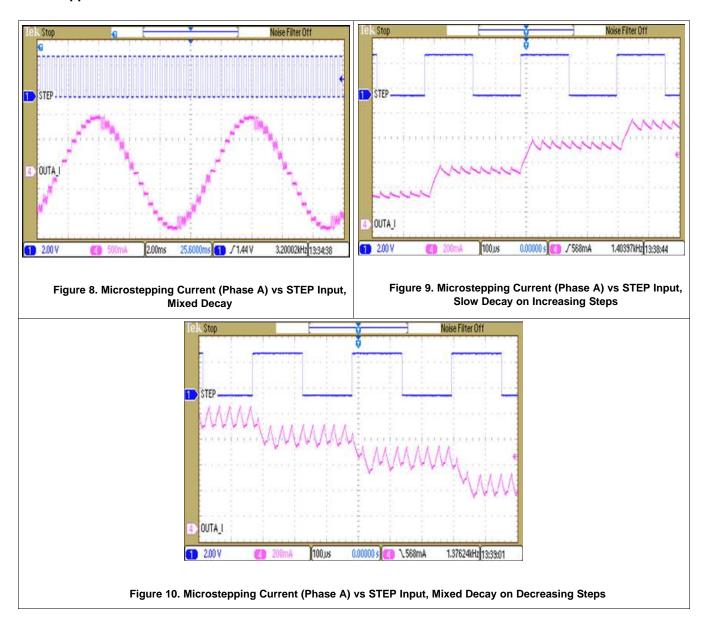

Submit Documentation Feedback



10 Power Supply Recommendations

The DRV8825 is designed to operate from an input voltage supply (VMx) range between 8.2 and 45 V. Two 0.1-µF ceramic capacitors rated for VMx must be placed as close as possible to the VMA and VMB pins respectively (one on each pin). In addition to the local decoupling caps, additional bulk capacitance is required and must be sized accordingly to the application requirements.

10.1 Bulk Capacitance

Bulk capacitance sizing is an important factor in motor drive system design. It is dependent on a variety of factors including:

- Type of power supply
- Acceptable supply voltage ripple
- Parasitic inductance in the power supply wiring
- Type of motor (brushed DC, brushless DC, stepper)
- Motor startup current
- Motor braking method

The inductance between the power supply and motor drive system will limit the rate current can change from the power supply. If the local bulk capacitance is too small, the system will respond to excessive current demands or dumps from the motor with a change in voltage. You should size the bulk capacitance to meet acceptable voltage ripple levels.

The data sheet generally provides a recommended value but system level testing is required to determine the appropriate sized bulk capacitor.

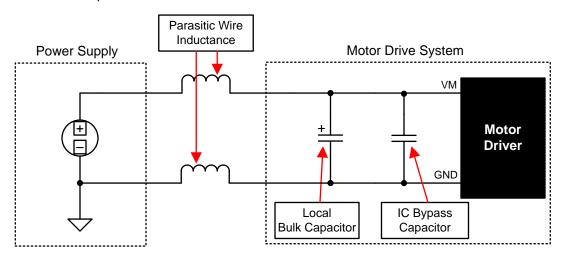


Figure 11. Setup of Motor Drive System With External Power Supply

10.2 Power Supply and Logic Sequencing

There is no specific sequence for powering-up the DRV8825. It is okay for digital input signals to be present before VMx is applied. After VMx is applied to the DRV8825, it begins operation based on the status of the control pins.



11 Layout

11.1 Layout Guidelines

The VMA and VMB pins should be bypassed to GND using low-ESR ceramic bypass capacitors with a recommended value of 0.1-µF rated for VMx. This capacitor should be placed as close to the VMA and VMB pins as possible with a thick trace or ground plane connection to the device GND pin.


The VMA and VMB pins must be bypassed to ground using an appropriate bulk capacitor. This component may be an electrolytic and should be located close to the DRV8825.

A low-ESR ceramic capacitor must be placed in between the CPL and CPH pins. TI recommends a value of 0.01-µF rated for VMx. Place this component as close to the pins as possible.

A low-ESR ceramic capacitor must be placed in between the VMA and VCP pins. TI recommends a value of 0.1- μ F rated for 16 V. Place this component as close to the pins as possible. Also, place a 1-M Ω resistor between VCP and VMA.

Bypass V3P3 to ground with a ceramic capacitor rated 6.3 V. Place this bypass capacitor as close to the pin as possible

11.2 Layout Example

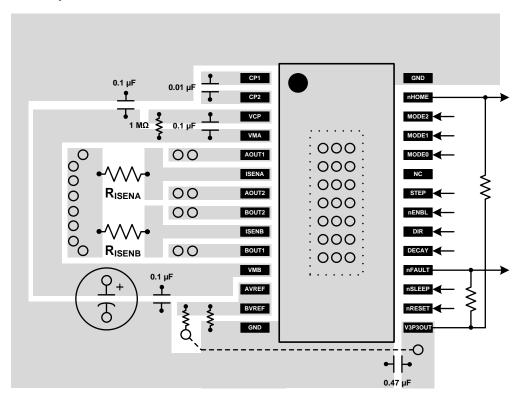

11.3 Thermal Protection

The DRV8825 has thermal shutdown (TSD) as described above. If the die temperature exceeds approximately 150°C, the device will be disabled until the temperature drops to a safe level.

Any tendency of the device to enter TSD is an indication of either excessive power dissipation, insufficient heatsinking, or too high an ambient temperature.

11.3.1 Power Dissipation

Power dissipation in the DRV8825 is dominated by the power dissipated in the output FET resistance, or $R_{DS(ON)}$. Average power dissipation when running a stepper motor can be roughly estimated by Equation 5.



Thermal Protection (continued)

$$P_{TOT} = 4 \times R_{DS(ON)} \times \left(I_{OUT(RMS)}\right)^{2}$$
(5)

where P_{TOT} is the total power dissipation, $R_{DS(ON)}$ is the resistance of each FET, and $I_{OUT(RMS)}$ is the RMS output current being applied to each winding. $I_{OUT(RMS)}$ is equal to the approximately 0.7x the full-scale output current setting. The factor of 4 comes from the fact that there are two motor windings, and at any instant two FETs are conducting winding current for each winding (one high-side and one low-side).

The maximum amount of power that can be dissipated in the device is dependent on ambient temperature and heatsinking.

Note that $R_{DS(ON)}$ increases with temperature, so as the device heats, the power dissipation increases. This must be taken into consideration when sizing the heatsink.

11.3.2 Heatsinking

The PowerPAD™ package uses an exposed pad to remove heat from the device. For proper operation, this pad must be thermally connected to copper on the PCB to dissipate heat. On a multi-layer PCB with a ground plane, this can be accomplished by adding a number of vias to connect the thermal pad to the ground plane. On PCBs without internal planes, copper area can be added on either side of the PCB to dissipate heat. If the copper area is on the opposite side of the PCB from the device, thermal vias are used to transfer the heat between top and bottom layers.

For details about how to design the PCB, refer to TI application report SLMA002, "PowerPAD™ Thermally Enhanced Package" and TI application brief SLMA004, PowerPAD™ Made Easy, available at www.ti.com.

In general, the more copper area that can be provided, the more power can be dissipated. It can be seen that the heatsink effectiveness increases rapidly to about 20 cm², then levels off somewhat for larger areas.



12 Device and Documentation Support

12.1 Trademarks

PowerPAD is a trademark of Texas Instruments.

12.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.3 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: DRV8825

Copyright © 2010-2014, Texas Instruments Incorporated

www.ti.com 7-May-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier RoHS		Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)	
						(4)	(5)			
DRV8825PWP	Obsolete	Production	HTSSOP (PWP) 28	-	-	Call TI	Call TI	-40 to 85	DRV8825	
DRV8825PWPR	Active	Production	HTSSOP (PWP) 28	2000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	DRV8825	

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE MATERIALS INFORMATION

www.ti.com 21-Mar-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DRV8825PWPR	HTSSOP	PWP	28	2000	330.0	16.4	6.9	10.2	1.8	12.0	16.0	Q1

PACKAGE MATERIALS INFORMATION

www.ti.com 21-Mar-2025



*All dimensions are nominal

Device	Package Type	pe Package Drawing		SPQ	Length (mm)	Width (mm)	Height (mm)	
DRV8825PWPR	HTSSOP	PWP	28	2000	350.0	350.0	43.0	

4.4 x 9.7, 0.65 mm pitch

SMALL OUTLINE PACKAGE

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



PowerPAD[™] TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
 4. Reference JEDEC registration MO-153.
- 5. Features may differ or may not be present.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
- 9. Size of metal pad may vary due to creepage requirement.
- 10. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2025. Texas Instruments Incorporated