



Model LMK



Model LMK

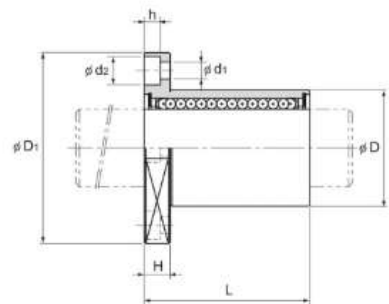

Model No.		Ball rows	Main dimensions										Flange perpendicularity	Eccentricity (max)	Radial clearance tolerance	Basic load rating		Mass g		
			Inscribed bore diameter		Outer diameter		Length		Flange diameter		K	H				PCD	Mounting hole		C N	C ₀ N
			dr	Tolerance	D	Tolerance	L	Tolerance	D ₁	Tolerance										
Standard type																				
LMK 6	4	6	0 -0.009	12	0	19	0 -0.2	28	0 -0.2	22	5	20	3.4×6.5×3.3	12	12	-5	206	265	17	
LMK 8S	4	8		15	-0.011	17		32		25	5	24	3.4×6.5×3.3	12	12	-5	176	225	25	
LMK 8	4	8		15		24		32		25	5	24	3.4×6.5×3.3	12	12	-5	265	402	26	
LMK 10	4	10		19		29		39		30	6	29	4.5×8×4.4	12	12	-5	373	549	45	
LMK 12	4	12	0 -0.010	21	0	30	0 -0.3	42	0 -0.3	32	6	32	4.5×8×4.4	12	12	-5	412	598	50	
LMK 13	4	13		23	-0.013	32		43		34	6	33	4.5×8×4.4	12	12	-7	510	775	67	
LMK 16	5	16		28		37		48		37	6	38	4.5×8×4.4	12	12	-7	775	1180	105	
LMK 20	5	20		32	0	42		54		42	8	43	5.5×9.2×5.4	15	15	-9	863	1370	130	
LMK 25	6	25	0 -0.012	40	0	59	0 -0.3	62	0 -0.3	50	8	51	5.5×9.2×5.4	15	15	-9	980	1570	270	
LMK 30	6	30		45	-0.016	64		74		58	10	60	6.6×11×6.5	15	15	-9	1570	2750	344	
LMK 35	6	35		52	0	70		82		64	10	67	6.6×11×6.5	20	20	-13	1670	3140	487	
LMK 40	6	40		60	-0.019	80		96		75	13	78	9×14×8.6	20	20	-13	2160	4020	790	
LMK 50	6	50	0 -0.015	80		100	0 -0.3	116	0 -0.3	92	13	98	9×14×8.6	20	20	-13	3820	7940	1705	
LMK 60	6	60		90	0 -0.022	110		134		106	18	112	11×17.5×10.8	25	25	-13	4710	10000	2278	

Note) Since this model contains a synthetic resin retainer, do not use it at temperature exceeding 80℃.
If requiring a type equipped with a seal, indicate it when placing an order.

Note) If an oil hole is required, this can be indicated by appending "OH" to the end of the model number.
For further information, contact THK.

(Example) LMK13 UU
Seal attached on both ends of the nut