

Reg no: 251100690023

1) Wi-Fi hacking (WPA):


- Analysing the .pcap file for SSID and BSSID

```

> Frame 1: Packet, 109 bytes on wire (872 bits), 109 bytes captured (872 bits)
> IEEE 802.11 Beacon frame, Flags: .....
  Type/Subtype: Beacon frame (0x0008)
  > Frame Control Field: 0x8000
    .000 0000 0000 0000 = Duration: 0 microseconds
  > Receiver address: Broadcast (ff:ff:ff:ff:ff:ff)
  > Destination address: Broadcast (ff:ff:ff:ff:ff:ff)
  > Transmitter address: Netgear_7e:40:80 (00:14:6c:7e:40:80)
  > Source address: Netgear_7e:40:80 (00:14:6c:7e:40:80)
  > BSS Id: Netgear_7e:40:80 (00:14:6c:7e:40:80)
    .... ..0. .... = LG bit: Globally unique address (factory default)
    .... ..0. .... = IG bit: Individual address (unicast)
    .... ..0000 = Fragment number: 0
    0001 0000 1010 .... = Sequence number: 266
  [WLAN Flags: .....]
> IEEE 802.11 Wireless Management
  > Fixed parameters (12 bytes)
  > Tagged parameters (73 bytes)
    > Tag: SSID parameter set: "teddy"
      Tag Number: SSID parameter set (0)

```

- Filtering the eapol packets, to check if the pcap has captured all 4 handshakes

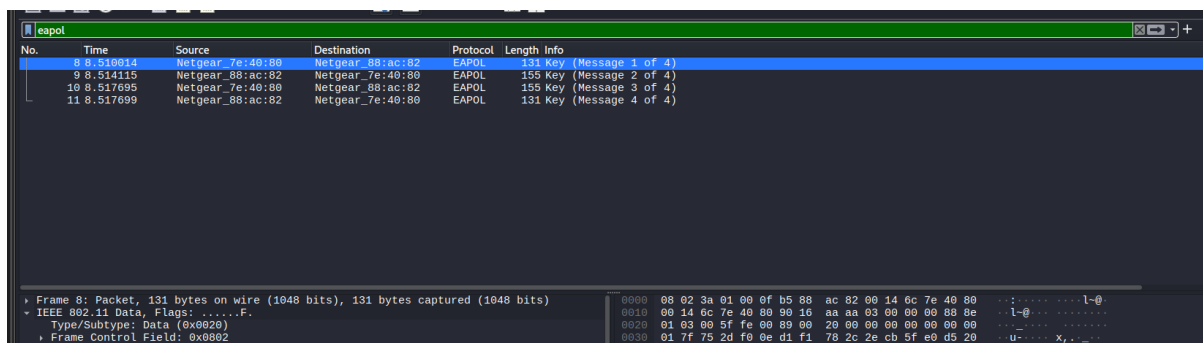

- Password cracking using `aircrack-ng -w /usr/share/wordlists/rockyou.txt wpa.full.pcap.`
password is 44445555

```

[00:00:24] 65410/14344392 keys tested (2724.73 k/s)

Time left: 1 hour, 27 minutes, 20 seconds      0.46%

KEY FOUND! [ 44445555 ]

Master Key      : 17 4F E9 A8 9F 52 85 FF 0B 7F A3 05 03 DB 38 93
                  75 15 D2 0B CE 17 D8 E2 EE 36 90 F0 47 B4 C5 0E

Transient Key   : B6 E9 EB A8 50 EA 32 D2 D1 85 32 B4 A7 26 A2 C3
                  E3 35 94 51 2E 9E 40 00 00 00 00 00 00 00 00 00
                  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
                  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00

EAPOL HMAC      : AE 83 8A AD 75 5C 16 1D 08 87 CD 2C F3 8C AE 60

```

2) Bluetooth hacking:

- `bthci_evt.bd_addr` – MAC address

wifi-bluetooth-advent 2.pcap

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

title advertising_header.pdu_type == 0x04

No.	Time	Source	Destination	Protocol	Length	Info
0	0.107987	68:04:c0:03:a5:41	Broadcast	LE LL	25	SCAN_RSP
10	0.172712	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
13	0.242948	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
17	0.278874	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
23	0.433748	68:04:c0:03:a5:41	Broadcast	LE LL	25	SCAN_RSP
29	0.535112	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
33	0.568191	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
35	0.574238	68:04:c0:03:a5:41	Broadcast	LE LL	25	SCAN_RSP
38	0.599921	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
41	0.631336	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
45	0.697473	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
48	0.729244	68:04:c0:03:a5:41	Broadcast	LE LL	25	SCAN_RSP
50	0.737685	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
53	0.776786	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
57	0.813497	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP
60	0.851679	IOTTECH_63:06:b4	Broadcast	LE LL	46	SCAN_RSP

Frame 23: 25 bytes on wire (200 bits), 25 bytes captured (200 bits)

- Bluetooth
- Bluetooth Low Energy RF Info
- Bluetooth Low Energy Link Layer
 - Access Address: 9de88bde6
 - Packet Header: 0x0064 (PDU Type: SCAN_RSP, TxAdd: Random)
 - 0100 = PDU Type: 0x4 SCAN_RSP
 - ..0... = Reserved: 0
 - .1.... = Reserved: 1
 - .1.... = Tx Address: Random
 - 0.... = Reserved: 0
 - Length: 0
 - Advertising Address: 68:04:c0:03:a5:41 (68:04:c0:03:a5:41)
 - Scan Response Data: <MISSING>
 - CRC: 0x000000

0000 00 cf 00 00 d0 be 89 8e 13 0c d0 be 89 8e 04
0010 11 a5 01 c0 04 00 00 00 00