An IoT-Enabled Hybrid Soft Sensor for Real-Time Residual-Moisture Monitoring and Resource Accounting in Compact Wool Scouring Machines

Robiya Tuguzbaeva, Sherkul Khakimov, Firuza Dustova, Ruzimurod Rosulov, and Mirabbos Anorkulov

***Abstract*—Wool scouring is among the most water- and energy-intensive steps in primary wool processing, yet small regional plants operate their machines without any instrumentation, and the key quality variable—residual moisture of the wool after each squeeze stage—is measured only occasionally by oven drying. This paper presents a low-cost Internet of Things (IoT) framework for a compact five-bowl wool scouring machine with an improved ribbed-drum/mesh squeezing device. An ESP32-based edge node acquires bowl temperature, liquor level and turbidity, squeeze-drum angular speed, make-up water flow and electrical power, and streams them over Wi-Fi (HTTP/MQTT) to a server that provides storage, alarms, per-kilogram resource indicators and a bilingual web/mobile application. We propose a hybrid soft sensor in which a design-of-experiments (DoE) regression model of the squeezing device, obtained from a 2^3 full-factorial experiment, serves as a physics-informed prior, and an online ridge-regression correction learned from sparse laboratory samples accounts for operating conditions. In a [TODO: N]-shift field deployment at [TODO: plant], the soft sensor achieved an RMSE of [TODO: x] % against oven-dry reference measurements, compared with [TODO: y] % for the DoE model alone and [TODO: z] % for a purely data-driven model, while the system delivered [TODO: packet-delivery ratio] % of messages with a median latency of [TODO: ms]. The measured specific energy and water consumption were [TODO: kWh/kg] and [TODO: L/kg].**

***Index Terms*—Industrial Internet of Things, soft sensor, wool scouring, edge computing, resource efficiency, textile manufacturing, digital twin.**

I. Introduction

PRIMARY wool processing—opening, scouring, squeezing and drying—determines the quality and cost of all downstream textile products. Scouring removes grease, suint and mineral dirt in a sequence of bowls filled with hot alkaline liquor; between bowls, squeezing devices remove the dirty liquor from the wool. Insufficient squeezing carries dirt into the next bowl, shortens liquor life and increases water and detergent consumption, and every percentage point of residual moisture must later be evaporated in the dryer.

R. Tuguzbaeva, S. Khakimov, F. Dustova, and R. Rosulov are with the Tashkent Institute of Textile and Light Industry, 5 Shohjahon Street, Tashkent 100100, Uzbekistan (e-mail: trobiya89@mail.ru; lionandlion9@mail.ru; firuzadustovahamraevna@mail.ru; rasulov.ruzimurad@mail.ru).

M. Anorkulov is with Carnegie Mellon University Qatar, Education City, Doha, Qatar (e-mail: manorqul@andrew.cmu.edu).

ORCID iDs: R. Tuguzbaeva 0009-0001-8480-9696; S. Khakimov 0000-0002-1933-1948; F. Dustova 0009-0007-5928-3198; R. Rosulov 0000-0003-0590-3121; M. Anorkulov [TODO: ORCID].

Corresponding author: Robiya Tuguzbaeva (e-mail: trobiya89@mail.ru).

[TODO: Funding: state grant 7/275, etc.]

In regions such as Uzbekistan, where wool comes largely from Karakul sheep and is processed in small, decentralised plants, large centralised scouring lines are uneconomic. A compact, resource-saving machine with an improved squeezing device (ribbed squeeze drum, guide slat drum and wrapped mesh surface) was developed and patented in previous work [1], [2]; factory tests reported a reduction of residual moisture from 65–70 % to 55–60 % and of installed power from 13 to 4.2 kW. However, such machines are operated without sensors: operators cannot see liquor temperature or dirtiness, moisture is measured only by occasional oven-dry samples, and resource consumption is not accounted per kilogram of wool.

Industrial IoT [3] and soft sensing [4] offer a remedy, but published IoT work in textiles focuses on spinning, weaving and dyeing; [TODO: add 6–10 recent IoT/textile/soft-sensor references, 2020–2025, incl. IEEE IoT-J papers] — to our knowledge, no work instruments the scouring/squeezing stage or exploits DoE models of the machine as a prior for an IoT soft sensor.

Contributions.

1) A low-cost (≈ US$ 200) IoT architecture for wool scouring machines with an ESP32 edge node, HTTP/MQTT transport, server-side analytics and an installable bilingual (EN/RU) web/mobile application.
2) A hybrid soft sensor for residual moisture that combines a 2^3 factorial regression model of the squeezing device (geometry prior) with an online, regularised correction for operating conditions, calibrated from sparse laboratory samples.
3) Real-time per-kilogram resource indicators (kWh/kg, L/kg) and rule-based fault alarms (heater failure, low level, dirty liquor, drum speed deviation).
4) A field deployment on an industrial machine with [TODO: N] shifts of data, an open dataset and code [TODO: repo URL].

II. Machine and Squeezing Model

The machine comprises five bowls (2.5 m^3 each); moving rakes (length 250 mm, linear speed [TODO: 0.15] m/s) transport the wool, and each bowl is followed by a squeezing device with a ribbed drum of diameter D, a mesh of hole diameter d and a drum–mesh gap h [1].

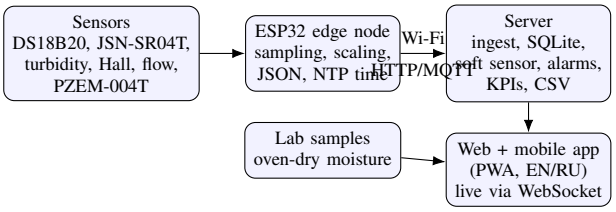


Fig. 1. Architecture of the proposed IoT framework.

A. DoE prior

A 2^3 full-factorial experiment with three replicates ($N = 8$, $m = 3$) with coded factors $X_1 = (d - 2)/1$, $X_2 = (D - 250)/50$, $X_3 = (h - 3)/1$ (mm) gave, after Student's test ($t_{0.05;16} = 2.12$), the adequate model ($F = 0.71 < F_{0.05;4;16} = 3.01$)

$$W_0 = 57.31 + 0.81X_1 - 0.95X_2 + 0.30X_3 \quad [\%]. \tag{1}$$

B. Hybrid soft sensor

Equation (1) captures geometry only. During operation, moisture also depends on the drum angular speed ω, the feed rate q, the liquor temperature T and the liquor turbidity τ. With normalised deviations $\boldsymbol{\phi} = [(\omega - \omega_0)/s_\omega,\ (q - q_0)/s_q,\ (T - T_0)/s_T,\ (\tau - \tau_0)/s_\tau]^\top$ we model

$$\hat{W} = W_0(d, D, h) + \mathbf{w}^\top \boldsymbol{\phi} + c, \tag{2}$$

where $(\mathbf{w}, c)$ minimise $\sum_i (W_i - W_{0,i} - \mathbf{w}^\top \boldsymbol{\phi}_i - c)^2 + \lambda \|\mathbf{w}\|^2$ over laboratory samples W_i taken after the squeezer and dried at 105 °C. The model is refitted on the server each time a sample is added; with no samples it reduces to the DoE prior. [TODO: Compare with: DoE only; ridge/GPR/random forest without prior; report learning curve vs number of samples.]

III. IoT System Architecture

Fig. 1 shows the architecture. [TODO: Describe sensor placement (photo), sampling period (2 s), payload size, power supply, enclosure, calibration of each sensor (method and uncertainty).]

IV. Experimental Setup

[TODO: Plant, dates, wool type (spring/autumn Karakul), number of shifts, lab sampling protocol (every 30 min, 3 replicates), train/test split by day, network environment (AP distance, RSSI).]

V. Results

A. Soft-sensor accuracy

B. Resource indicators

[TODO: kWh/kg and L/kg per shift, baseline vs improved machine, mean ± SD, n.]

C. Communication performance

[TODO: Packet delivery ratio, latency distribution, outages, energy of node.]

TABLE I
Residual-moisture prediction on held-out field samples

Model	RMSE (%)	MAE (%)	R^2
DoE prior only (1)	[TODO:]	[TODO:]	[TODO:]
Data-driven ridge (no prior)	[TODO:]	[TODO:]	[TODO:]
Random forest (no prior)	[TODO:]	[TODO:]	[TODO:]
Hybrid (proposed)	[TODO:]	[TODO:]	[TODO:]

D. Fault detection

[TODO: Detection delay and false-alarm rate for heater-off, low-level, drum-speed scenarios.]

VI. Discussion and Limitations

[TODO: Generalisation across wool types, sensor fouling (turbidity probes in alkaline liquor), Wi-Fi in wet halls, scaling to multiple plants, security (device token, TLS).]

VII. Conclusion

[TODO:]

References

[1] R. B. Tuguzbayeva, "Improvement of the working parts of a wool washing machine," Ph.D. dissertation, Tashkent Inst. Textile Light Ind., Tashkent, Uzbekistan, 2024.
[2] R. B. Tuguzbayeva *et al.*, "Device for squeezing wool in a wool washing bowl," Uzbekistan Utility Model Patent FAP 02351, 2023. [TODO: check inventors]
[3] L. D. Xu, W. He, and S. Li, "Internet of things in industries: A survey," *IEEE Trans. Ind. Informat.*, vol. 10, no. 4, pp. 2233–2243, Nov. 2014.
[4] P. Kadlec, B. Gabrys, and S. Strandt, "Data-driven soft sensors in the process industry," *Comput. Chem. Eng.*, vol. 33, no. 4, pp. 795–814, 2009.
[5] F. Tao, H. Zhang, A. Liu, and A. Y. C. Nee, "Digital twin in industry: State-of-the-art," *IEEE Trans. Ind. Informat.*, vol. 15, no. 4, pp. 2405–2415, Apr. 2019.
[6] D. C. Montgomery, *Design and Analysis of Experiments*, 9th ed. Hoboken, NJ, USA: Wiley, 2017.

Robiya Tuguzbaeva received the Ph.D. degree in technical sciences from the Tashkent Institute of Textile and Light Industry, Tashkent, Uzbekistan, in [TODO: year], and is currently an Assistant Professor with the Department of Natural Fiber Technology and Engineering, Tashkent Institute of Textile and Light Industry. Research interests include wool processing machinery, resource-efficient textile technology, and industrial IoT.

Sherkul Khakimov is a Professor with the Tashkent Institute of Textile and Light Industry, Tashkent, Uzbekistan. [TODO: 2–3 lines.]

Firuza Dustova is with the Tashkent Institute of Textile and Light Industry, Tashkent, Uzbekistan. [TODO: 2–3 lines.]

Ruzimurod Rosulov is with the Tashkent Institute of Textile and Light Industry, Tashkent, Uzbekistan. [TODO: 2–3 lines.]

Mirabbos Anorkulov is with Carnegie Mellon University Qatar, Doha, Qatar.
[TODO: 2–3 lines.]