EN_VTevo_PRM_21-10_r7.1

VTevo

Revolutionary

ECO-FRIENDLY
COMPACT
FUEL SAVING
LED TECHNOLOGY

GENERAC® | MOBILE

VTevo

The lighting power of 4x320W LED floodlights meets a very narrow canopy design evolving the new **VTevo** into the most compact and eco-friendly lighting tower ever created! **VTevo** will help you to skimp up to **75%*** of fuel and protect our environment with a reduction in **carbon emissions** up to **10* Ton** per year. The machine can run continuously without refuelling up to **200*** hours.





Aluminium case

LED life expectancy: **50,000** hours

4x320W G4 LED floodlights

Vertical manual mast with 8 metres maximum height

Galvanized base of the mast

Manual winch

340° mast rotation

2 side doors to the engine compartment

Steel reinforced body for the best reliability

Large cooling grate

Dismountable tow trailer

Fuel tank: 120 litres with a liquid containment tank (110% capacity)

4 independent stabilizers

Forklift wide pockets located on all sides

* compared to a traditional MH machine, data refer to VTevo in configuration "Y1"

The compact revolution

Standard options

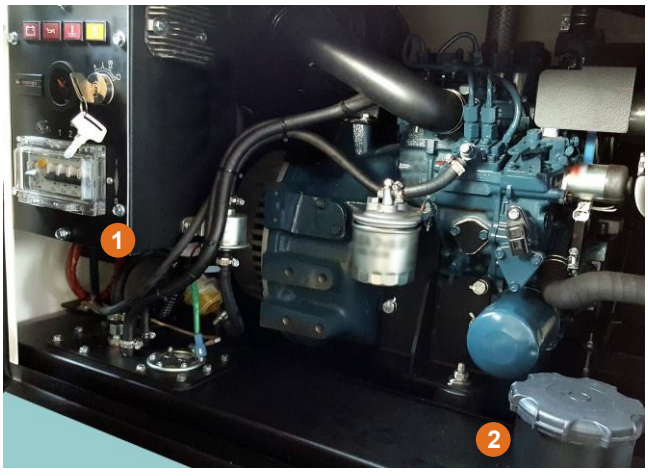



Innovation comes through the careful management of space. Generac Mobile® design a brand new lighting tower that combines all market requirements with a compact bodyframe.

1- Main control panel protected with best accessibility to all controls and switches
2- Comfortable and large duct for fast and safe refueling
3- Mast rotation locking system, protected and safe
4- Central lifting hook for a perfect stability during handling phase
5- External panel includes: emergency button floodlights quick connector, 1x230V/16A socket
6- Large manhole for easy access to radiator cap

Main features

- *Vertical galvanized mast, max height: **8 m***
- *Certified wind stability up to **80 km/h***
- *4 x 320W LED floodlights*
- *Lamp «ON/OFF» one by one switches*
- *Low speed towing trailer, single axle*
- *43.5/.5 kVA 230V power generator (50/60 Hz)- Silenced canopy*
- ***120 liters** fuel metal tank (110% **bunded)***
- *Electric socket 1x230V/16A*
- *Hourmeter, emergency stop button, fuel indicator*
- *Automatic shut down (lack of oil, fuel or water)*

Loading chart

20'** CONTAINER: **10 units** (disassembled)
40'** CONTAINER: **22 units** (disassembled)

13m** TRUCK: **25 units** (disassembled)
***13m** TRUCK: **16 units** (only tow bar dismounted)*

*** dismounted parts: tow bar, wheels and stabilizers*

GENERAC MOBILE

VTevo

REDUCED TRANSPORT COSTS! LOAD MORE UNITS PER TRUCK/CONTAINER



REDUCED CO_2 EMISSION UP TO 10*TON PER YEAR! PROTECT THE ENVIRONMENT!

REDUCED FUEL CONSUMPTION: RUN WITHOUT REFUELLING UP TO 10 DAYS**



NO MH LAMPS AND SMALLER ENGINES MEANS LOWER MAINTENANCE COSTS

LONGER RUNNING TIME, LESS EFFORTS IT MEANS REDUCED SERVICE COSTS

* compared to a traditional MH machine, data refer to VTevo in configuration "Y1" - ** 1 full day = 24 hours of continuous work

TECHNICAL DATA

		VTevo Y1[1]	VTevo Y2	VTevo K2
Min. dimensions (mm)	Length x Width x Height	2480 x 1190 x 2450		
Max. dimensions (mm)	Length x Width x Height	2480 x 2400 x 8000		
Dry weight (kg)		658	650	640
Engine models available		Yanmar L70N	Yanmar 2TNV70	Kubota Z482
Average sound pressure level	dB(A) @ 7m	66	59	59
Engine cooling	L: Liquid / A: Air	A	L	L
Cylinders (q.ty)		1	2	2
Engine speed (RPM)	50 / 60 Hz	3000 / 3600	1500 / 1800	1500 / 1800
Total running time (h)		200	171	171
Lifting system	M: Manual / H: Hydraulic	M		
Mast rotation (°)		340		
Wind speed resistance (km/h)		80		
Lamps power (W)		4 x 320		
Lamps type		G4 LED		
Total lumen (Lm)		188160		
Illuminated area (m^2)		4500		
Alternator	kVA/V/Hz	3.5/230/50 - 4.5/240/60		
16A outlet socket (max.)	kVA/V/Hz	2/230/50 - 2/240/60		
Tank capacity (liters)		120		
Liquid containment tank (110%)	√: Yes / ●: No	√		

[1] Not globally available. Please check with local dealer or subsidiary.

GENERAC® | MOBILE

Generac Mobile Products S.r.l.
Via Stazione, 3 bis - 27030 Villanova d'Ardenghi (PV) - Italy
Tel +39 0382 567011 - gmp.srl@generac.com
www.generacmobile.com