


Inverse Kinematics of a Three-Wheel Omnidirectional Robot

ME597 - Autonomous Systems - Fall 2026

A planar mobile robot has two mecanum wheels with roller angles of magnitude 45° and one omni wheel. The body-fixed frame $\{B\} = (x_b, y_b)$ is at center of the robot, and the inertial frame is $\{I\} = (X_e, Y_e)$. The robot has a dimension of length a and width a . All wheels have radius r . The wheel angular velocities ω_1, ω_2 , and ω_3 are defined as positive when no-slip wheel rotation drives the corresponding wheel center in the directions indicated by V_1, V_2 , and V_3 , respectively. At the instant of interest, the body-fixed frame is aligned with the inertial frame, so $\theta = 0$.

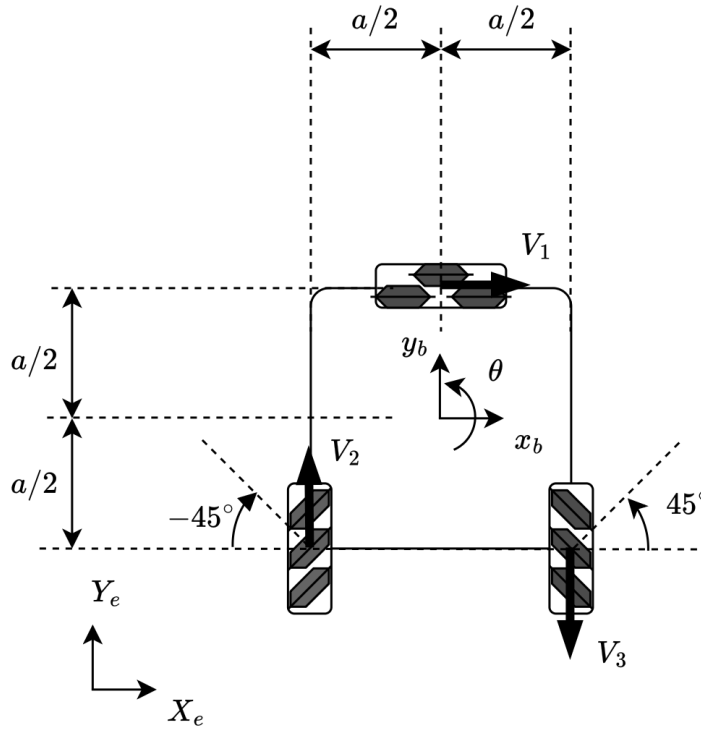

$$\begin{bmatrix} \sin(\alpha_i + \beta_i + \gamma_i) & -\cos(\alpha_i + \beta_i + \gamma_i) & -l_i \cos(\beta_i + \gamma_i) \end{bmatrix} R(\theta) \dot{\xi}_I = r \omega_i \cos \gamma_i,$$

where

$$R(\theta) = \begin{bmatrix} \cos \theta & \sin \theta & 0 \\ -\sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

maps inertial-frame velocity components into the body frame.

Using the rolling constraint, express the robot's inertial frame velocity $\dot{\xi}_I = (\dot{X}_e, \dot{Y}_e, \dot{\theta})^\top$ as a function of the rotation velocity of the wheels $\omega = (\omega_1, \omega_2, \omega_3)^\top$.