


Goal. Use the provided PKT file and configure it with the following access list:

Ban all communication from VLAN 700 to VLAN 800, but allow in opposite direction.

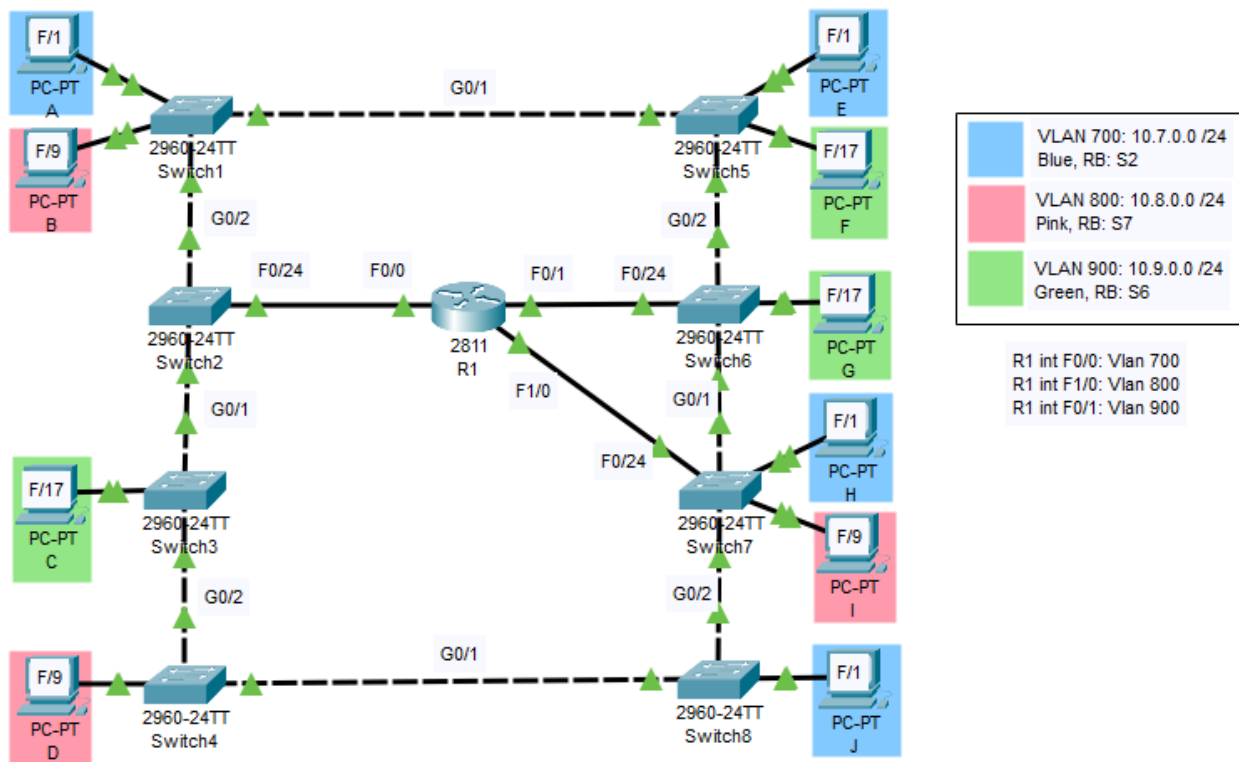

ACL configuration

Blocking traffic from VLAN 700 to VLAN 800:

```
R1(config)#ip access-list standard 1
R1(config-std-nacl)#deny 10.7.0.0 0.0.0.255
R1(config-std-nacl)#permit any
R1(config-std-nacl)#exit
```

```
R1(config)#interface FastEthernet 1/0.800
R1(config-subif)#ip access-group 1 out
```