Goal. Use the provided PKT file and configure the following:
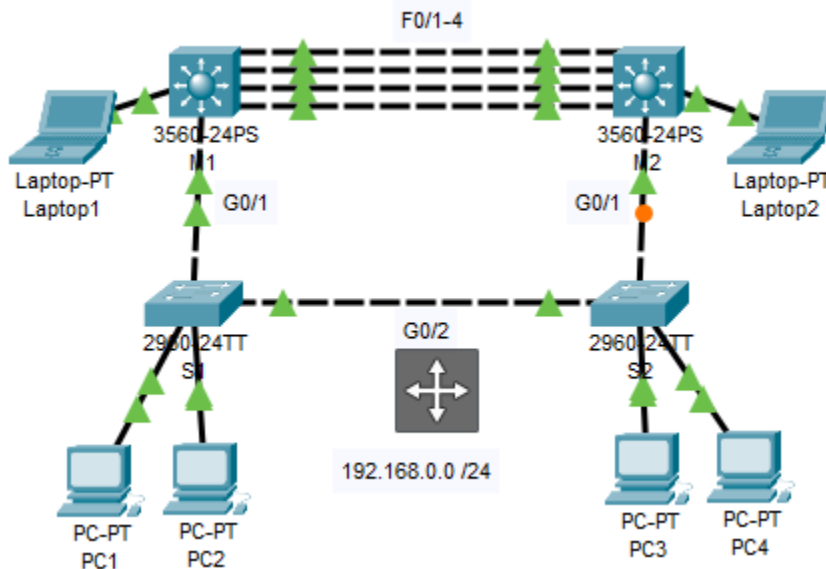
1. Root bridge on M1.
2. Ether Channel with trunk.

PC IPs are already configured.
Rapid-PVST already configured on all switches (and MLSs).
Trunk links except for Ether Channel are already configured.

1. Root Bridge

```
M1(config)# spanning-tree vlan 1 root primary
```

2. EtherChannel with trunk

```
M1(config)#interface range FastEthernet 0/1-4
M1(config-if-range)#channel-group 1 mode desirable
M1(config-if-range)#switchport trunk encapsulation dot1q
M1(config-if-range)#switchport mode trunk

M1(config)#int port-channel 1
M1(config-if)#switchport trunk encapsulation dot1q
M1(config-if)#switchport mode trunk
```

* same on M2