


**Goal.** Use the PKT file from our previous exercise and configure VTP. The server should be S5, and all other switches should be clients. Name the VLANs on the server according to the diagram below.

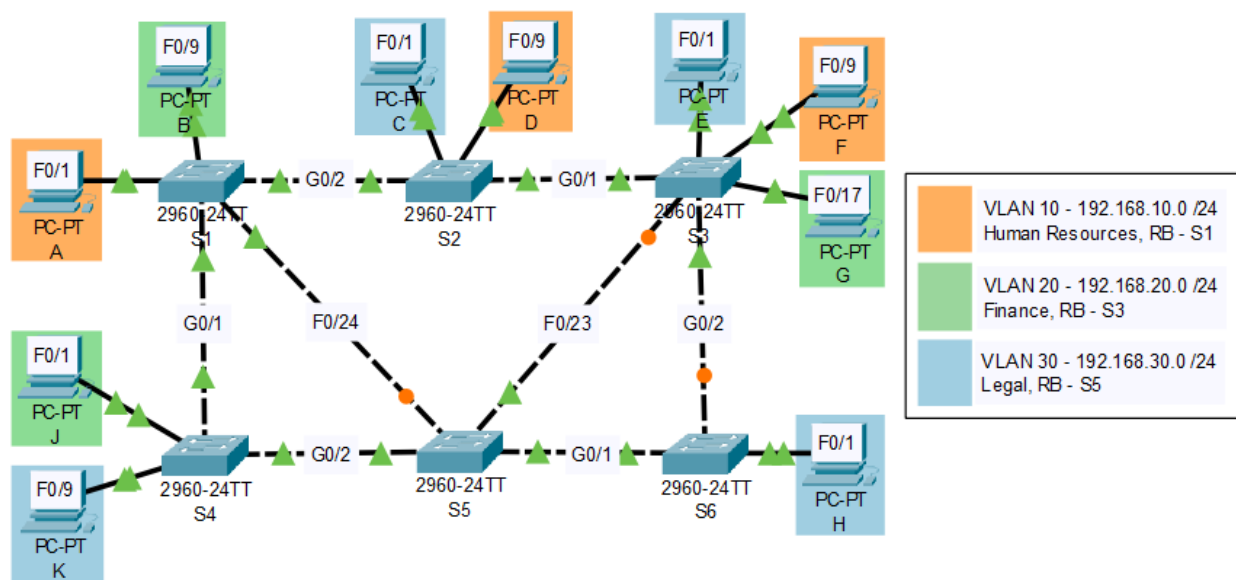

## VTP

```
S5(config)# vtp mode server
S5(config)# vtp domain Cyber
S5(config)# vtp password cyber
```

### Create VLANs, set names

```
S5(config)# vlan 10
S5(config-vlan)# name HR
```

### Client switches:

```
S(config)# vtp mode client
S(config)# vtp password cyber
```