

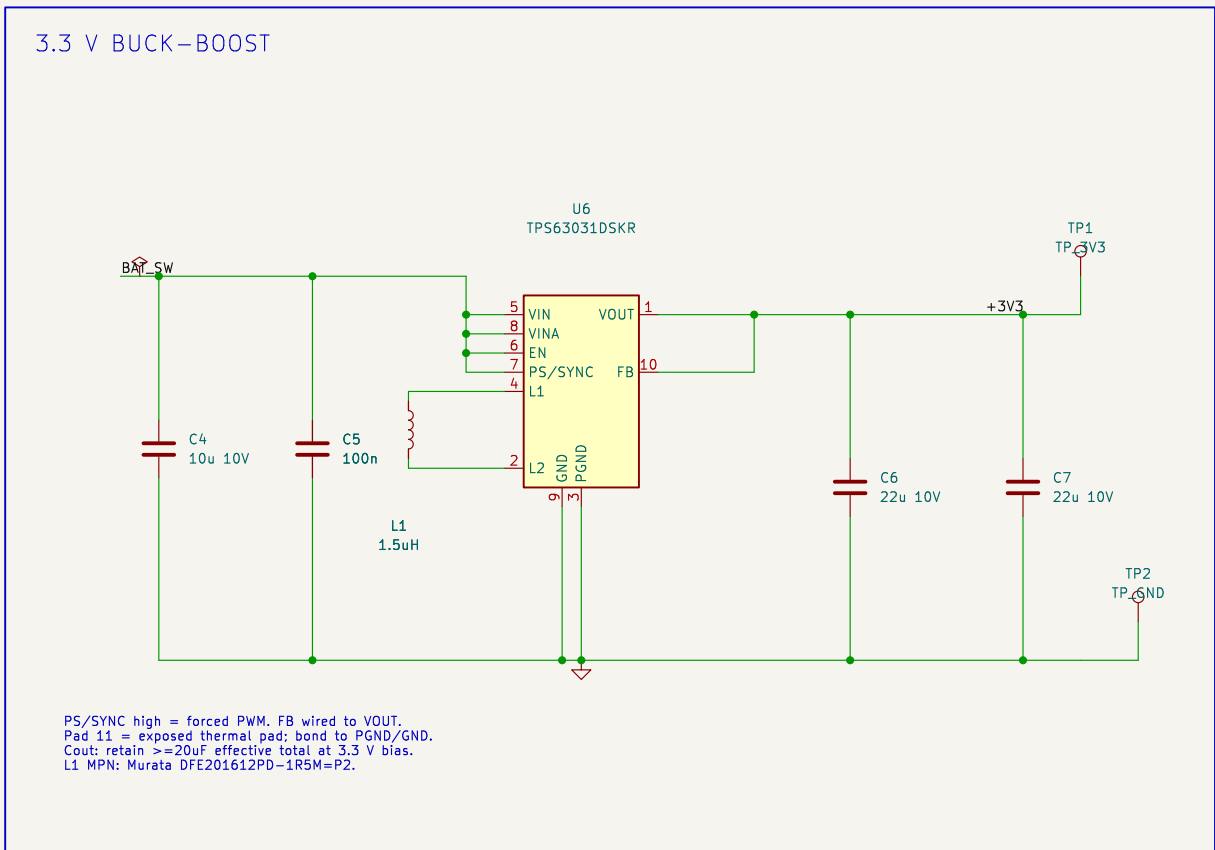


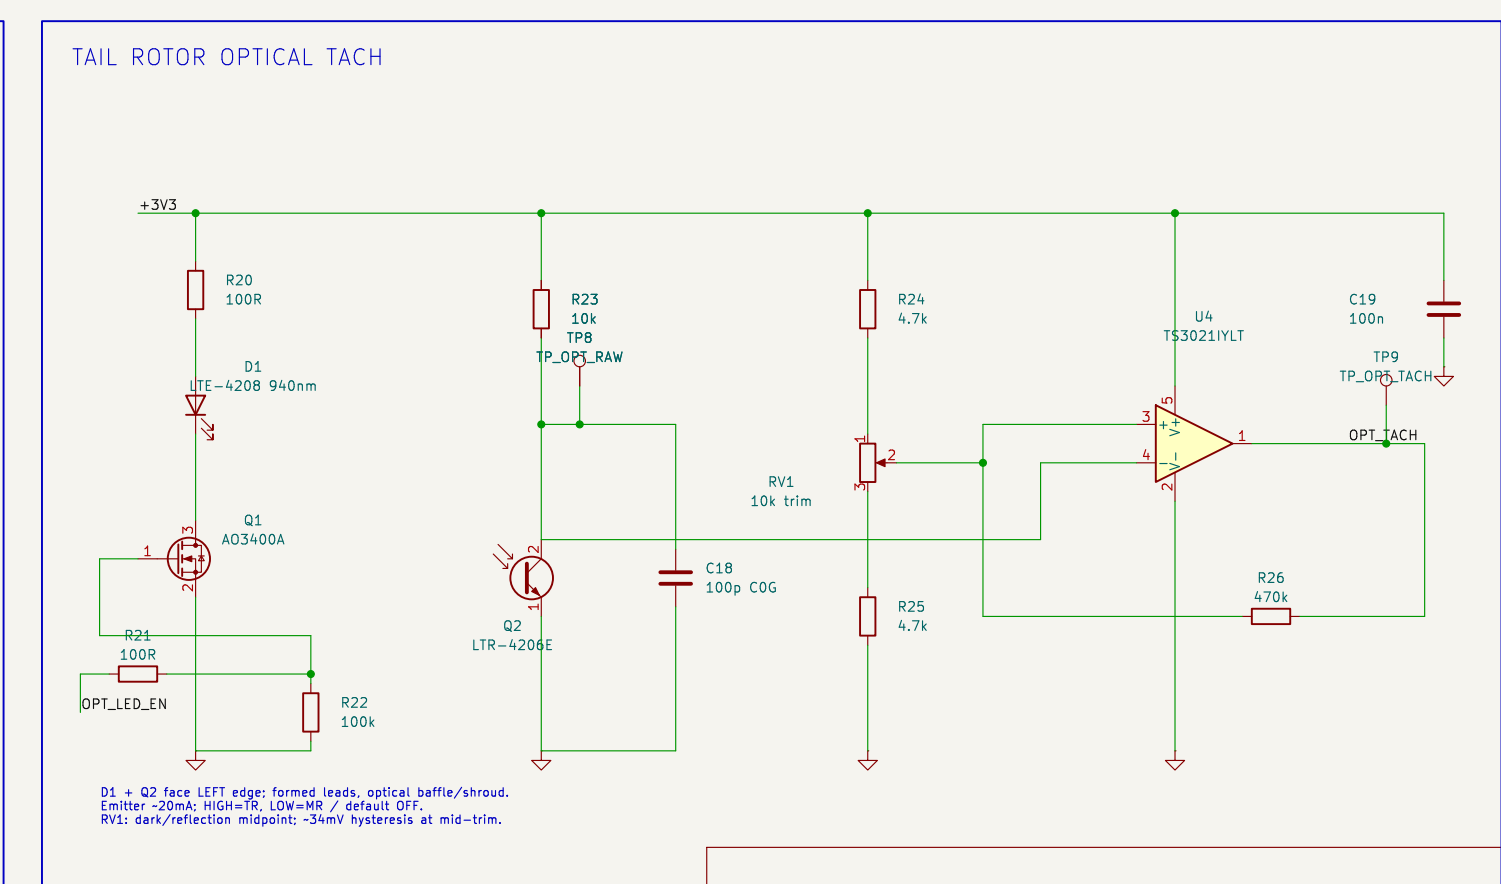

Mechanical intent only: future PCB ~50 x 40 mm.
No PCB generated. Keep antenna area clear.
Rigid mount near MEMS; baffled optical window on LEFT.
Validate phase delay and tach SNR on bench before use.

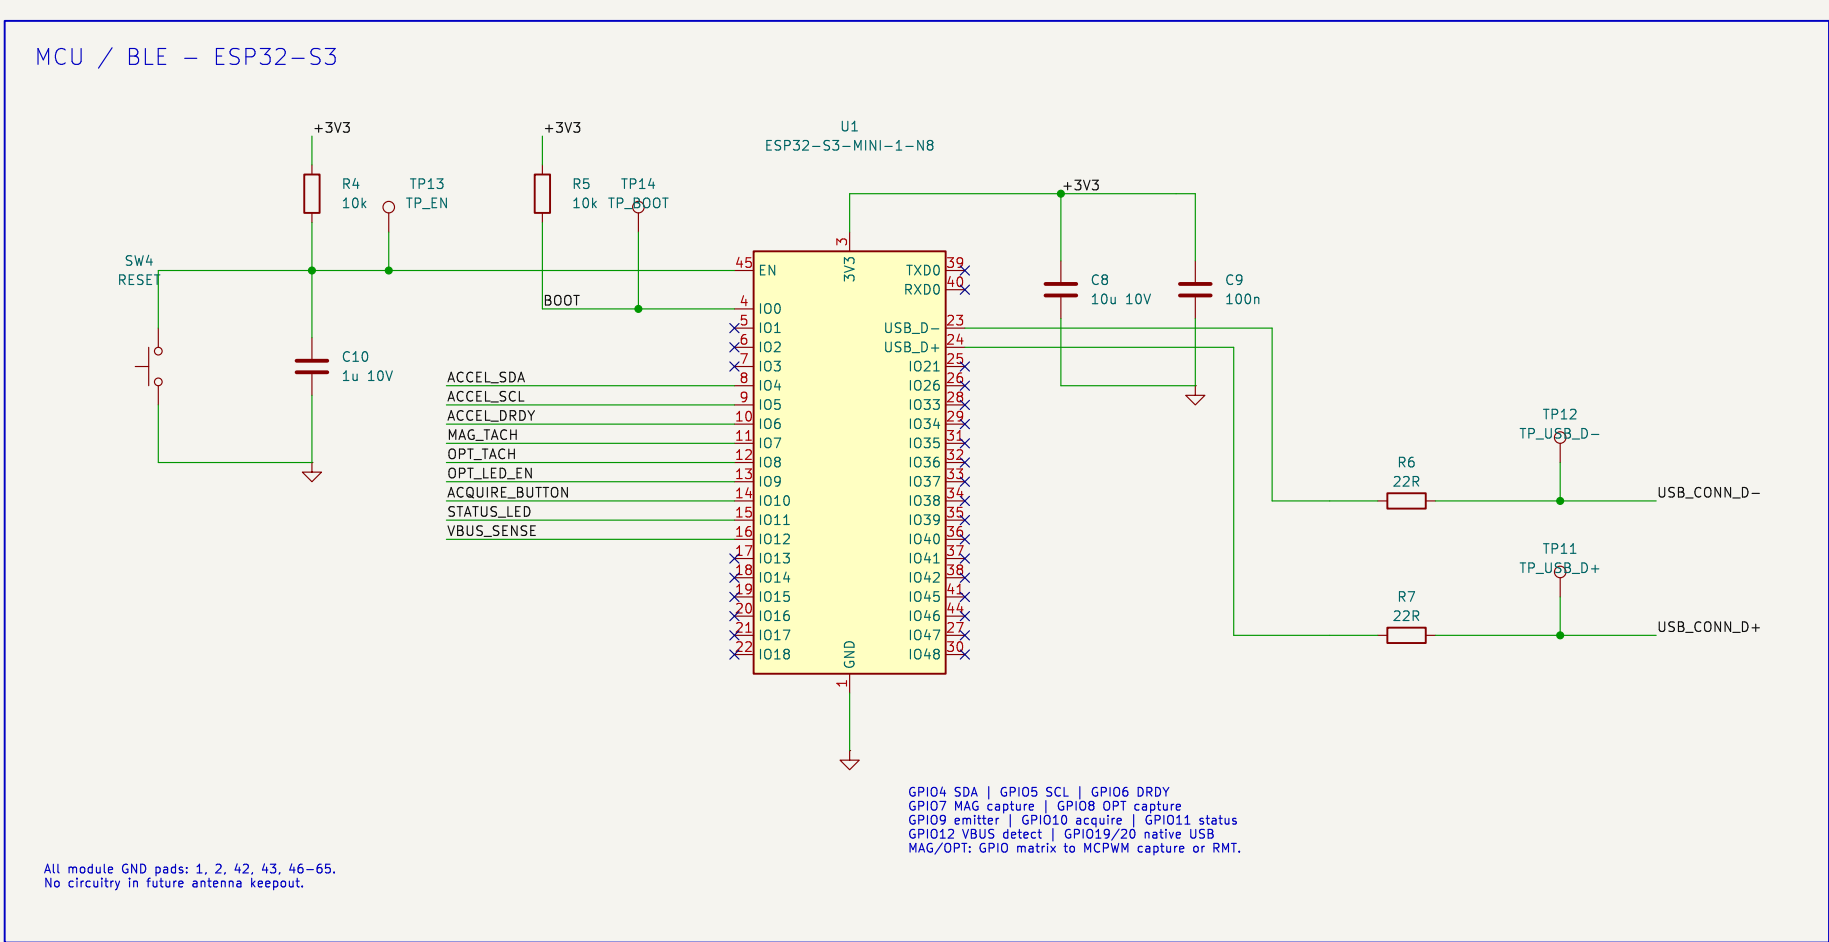

C1-C20: ceramic, X7R unless COG noted; $\geq 10V$ rating. Select effective capacitance at bias.
J3 = J_MAG: two plated wire holes only, 1 MAG+, 2 MAG-. No aircraft-specific board connector.

10