Slides from Plain Text

A tour of the LightTurtles deck toolkit

Nathan Jones

October 2026

LightTurtles

Plain Markdown is the default

- `## Heading` starts a new slide; `# Heading` starts a section
- Lists, **bold**, `code`, links, tables, and images all just work
- Speaker notes go in a `notes` block (press **S** to open them)

Build a list one step at a time

Build a list one step at a time

- Each bullet appears on a click

Build a list one step at a time

- Each bullet appears on a click
- Wrap the list in `::: incremental`

Build a list one step at a time

- Each bullet appears on a click
- Wrap the list in `::: incremental`
- Or add `{.fragment}` to anything to make it a build step

Build a list one step at a time

- Each bullet appears on a click
- Wrap the list in `::: incremental`
- Or add `{.fragment}` to anything to make it a build step

This sentence is its own build step.

Two columns, no HTML


Pandoc's `columns` div handles the common case: text beside a figure, or code beside its explanation.

> Callouts are a div with a class:
>
> `::: callout`

```
typedef struct {
    uint8_t  state;
    uint32_t last_tick;
} debouncer_t;

bool debounce(debouncer_t *d, bool raw,
              uint32_t now)
{
    if (raw != d->state &&
        now - d->last_tick > 20) {
        d->state = raw;
        d->last_tick = now;
    }
    return d->state;
}
```

One idea, full screen



Escape hatches

Drop into HTML when layout matters


Fetch
Read the next instruction from flash.

Decode
Figure out what it means.

Execute
Do it, then do it again.


Markdown keeps working **after** the raw HTML block, so you only pay for HTML where you need it.

An interactive tool inside a slide

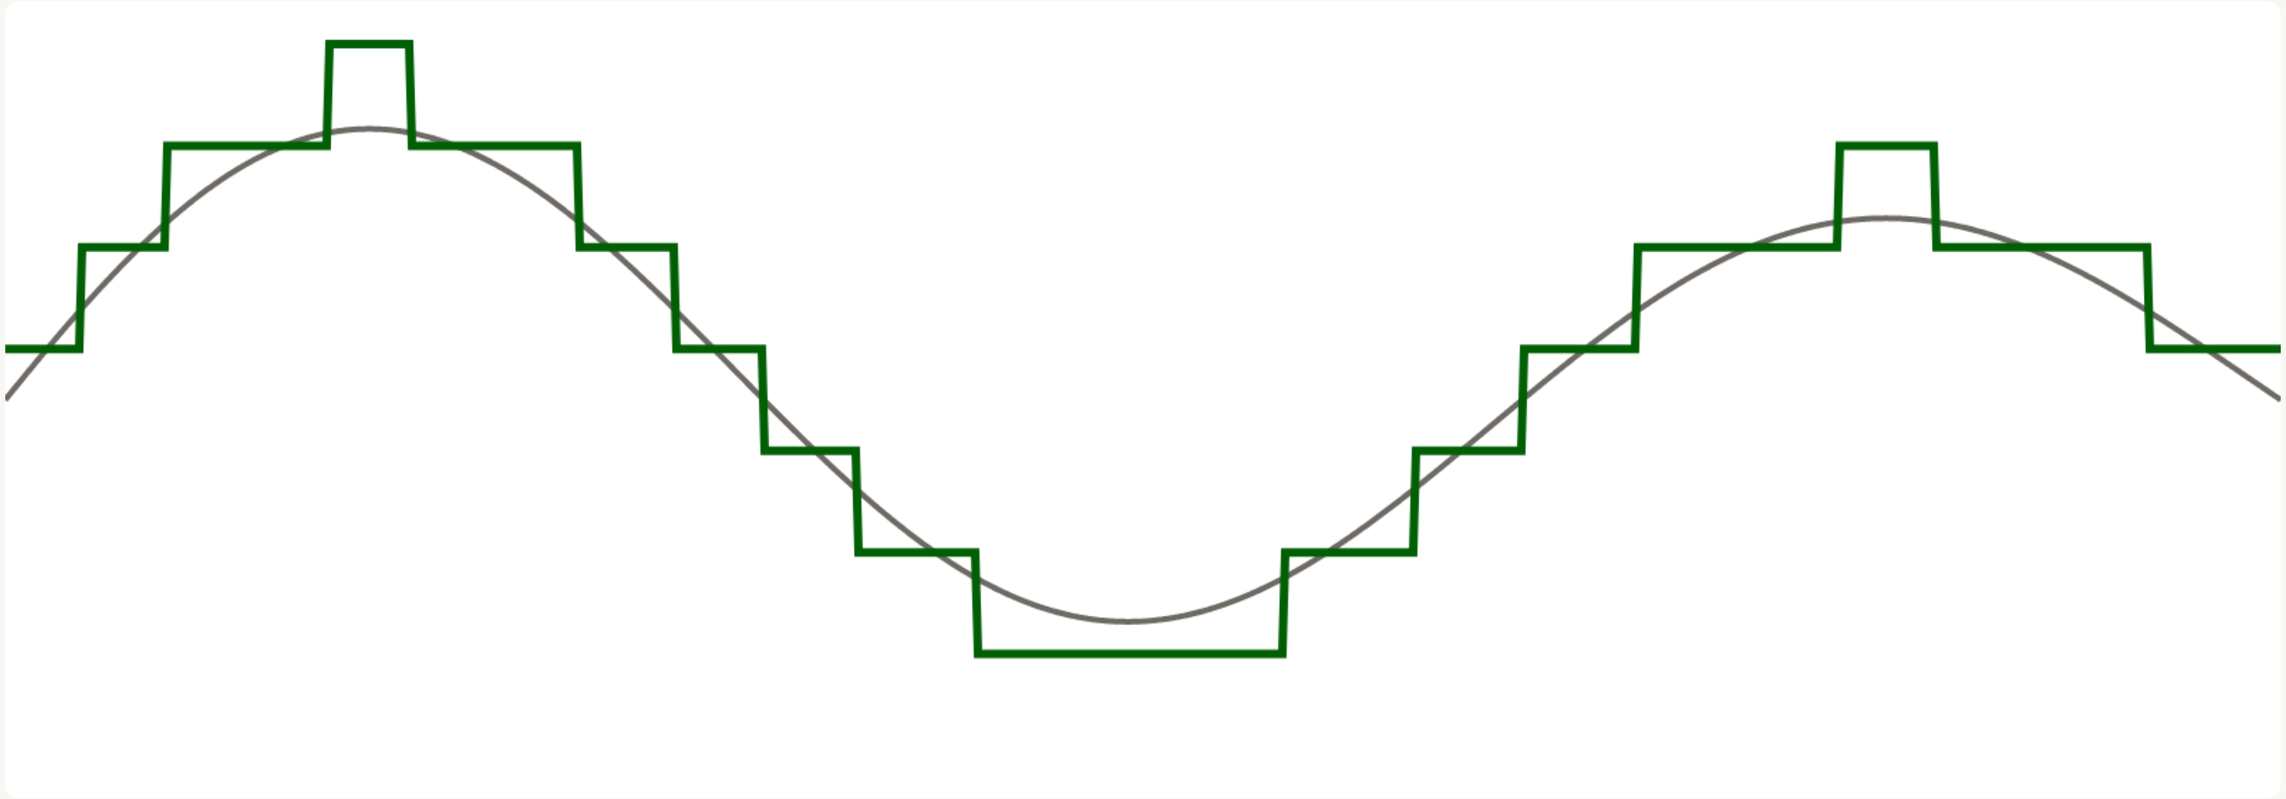


ADC resolution — 3 bits · 8 levels

Inside a microcontroller

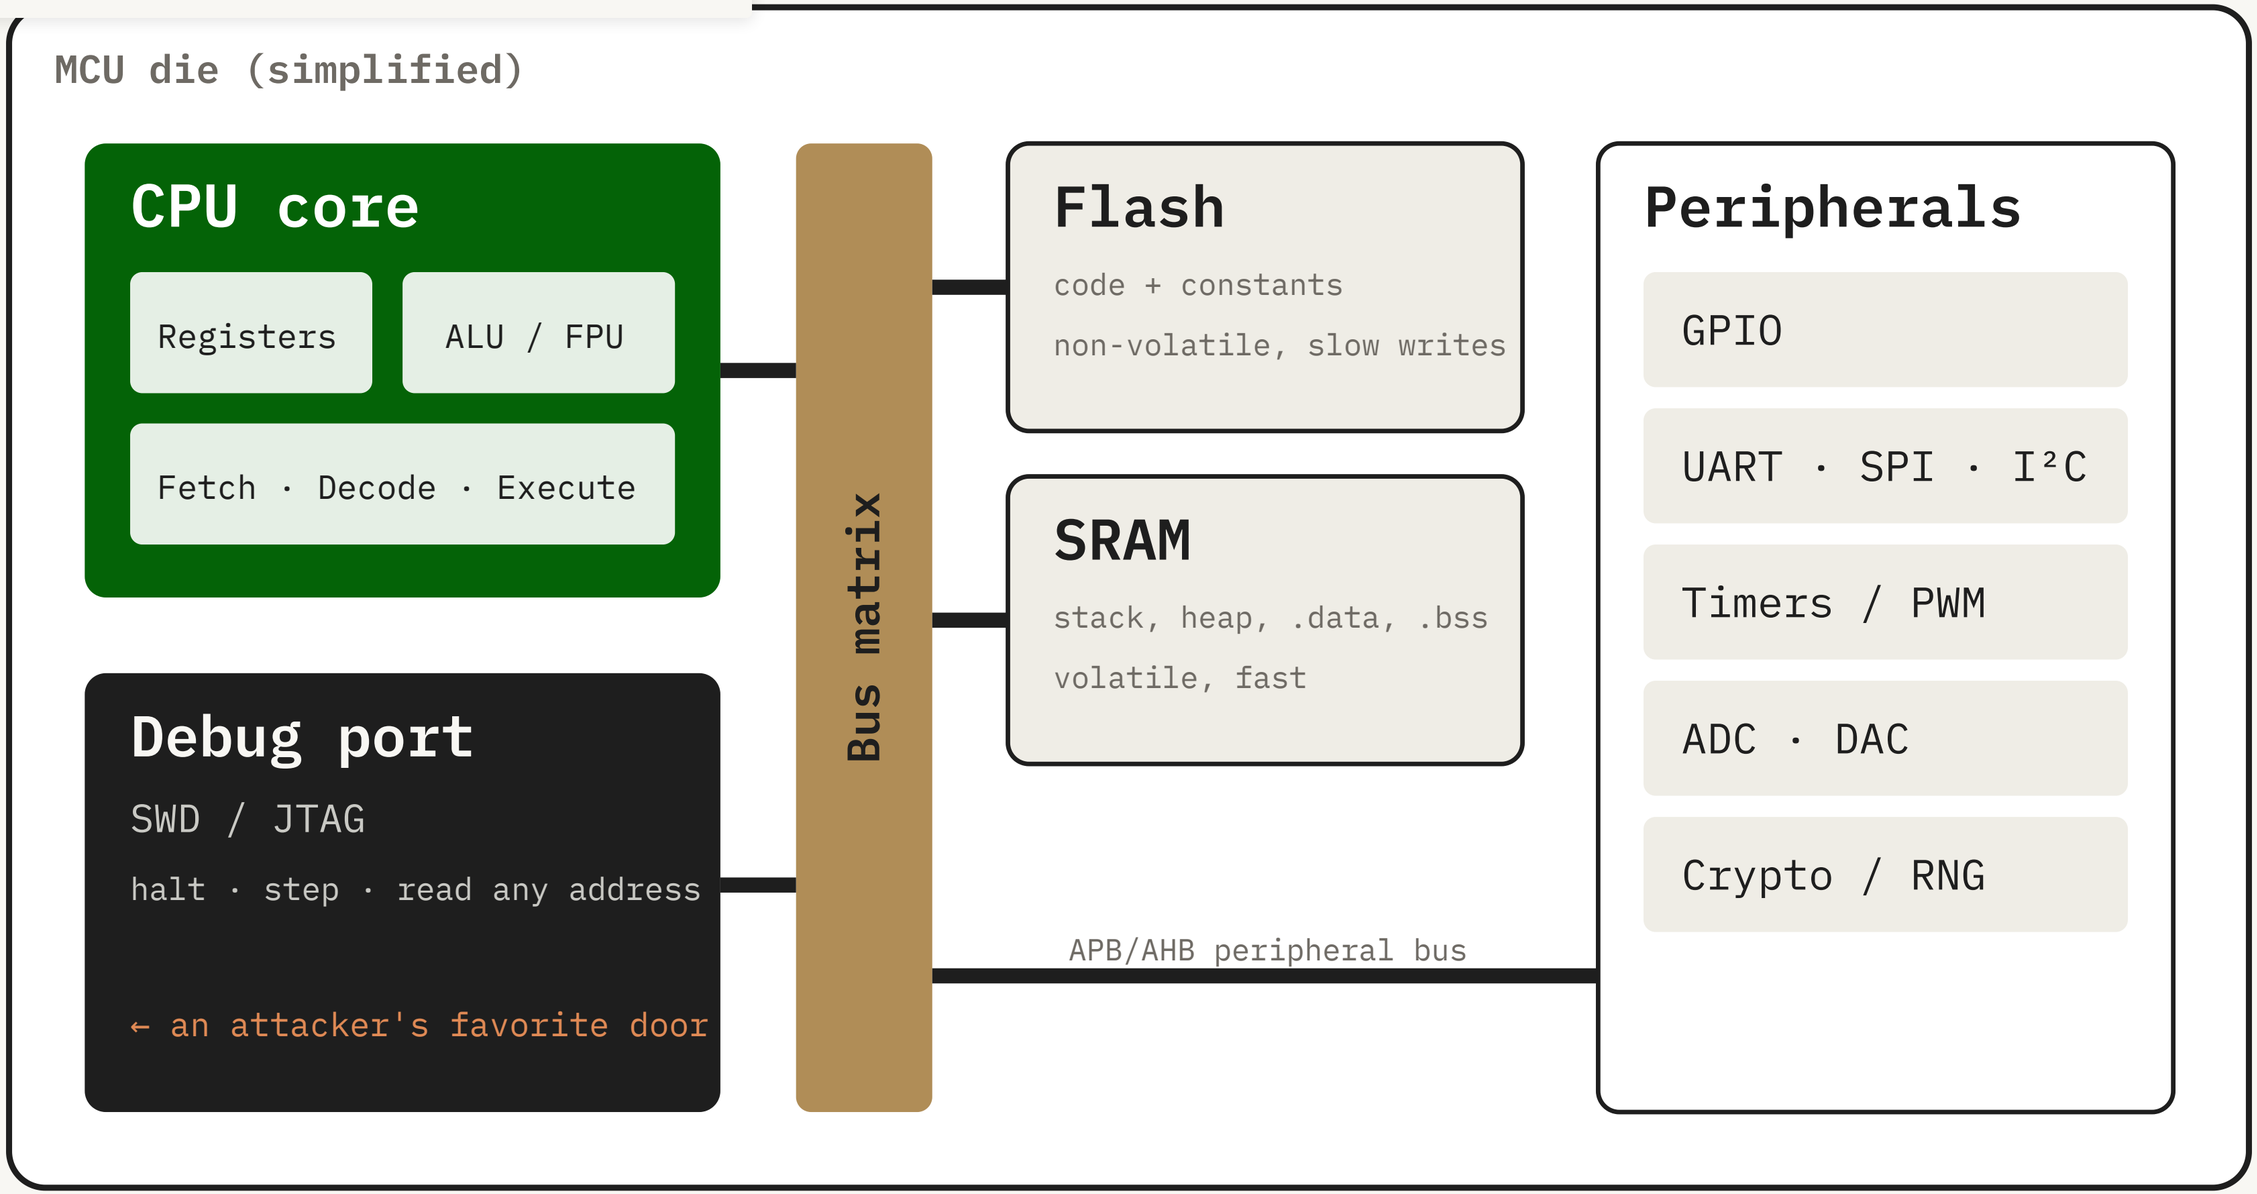


MCU die (simplified)

Inside a microcontroller

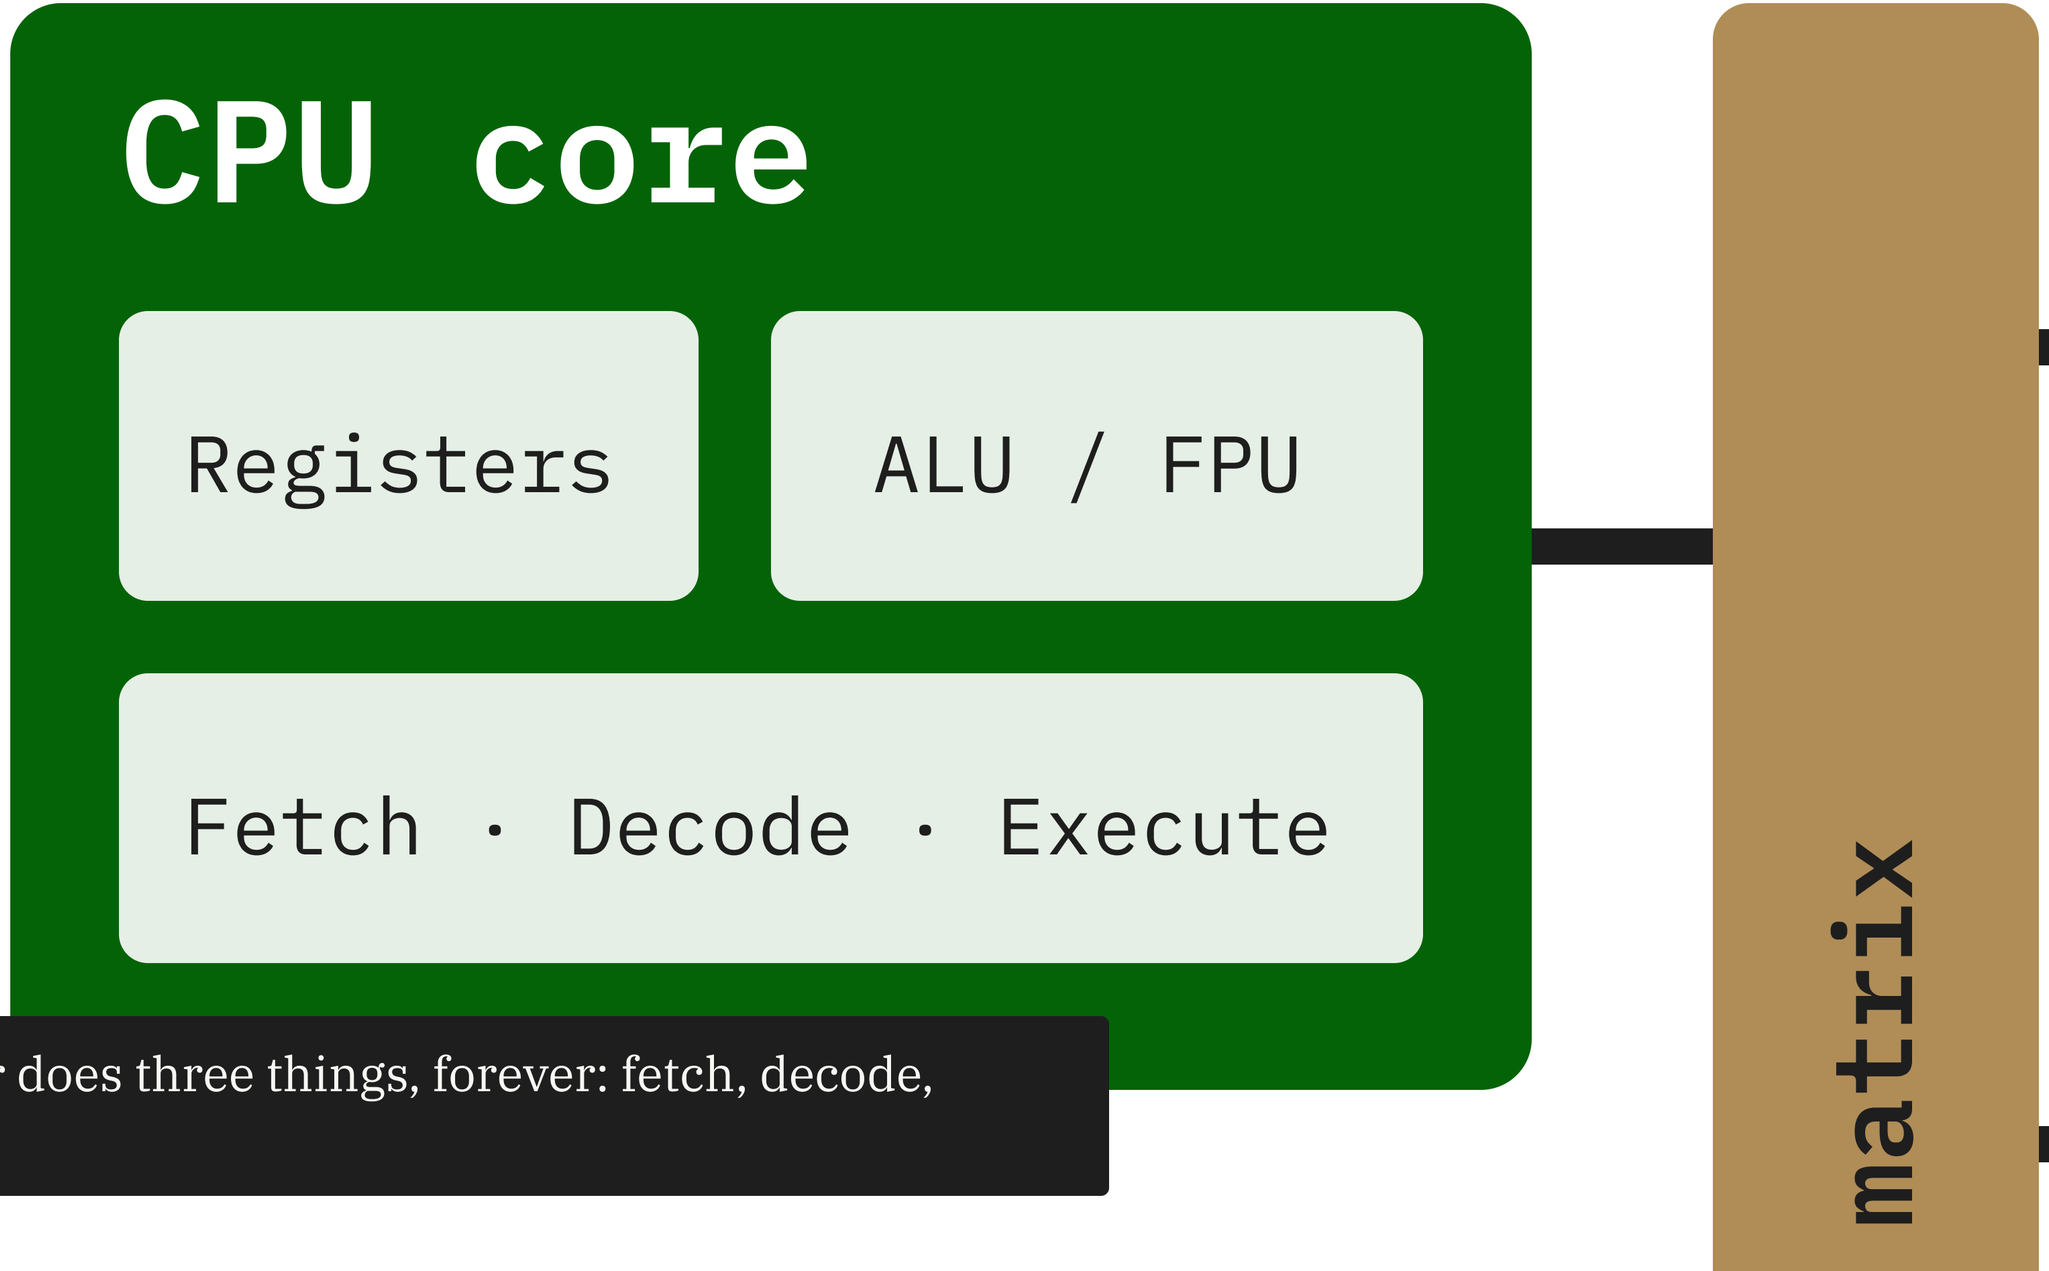


The CPU only ever does three things, forever: fetch, decode, execute.


Inside a microcontroller

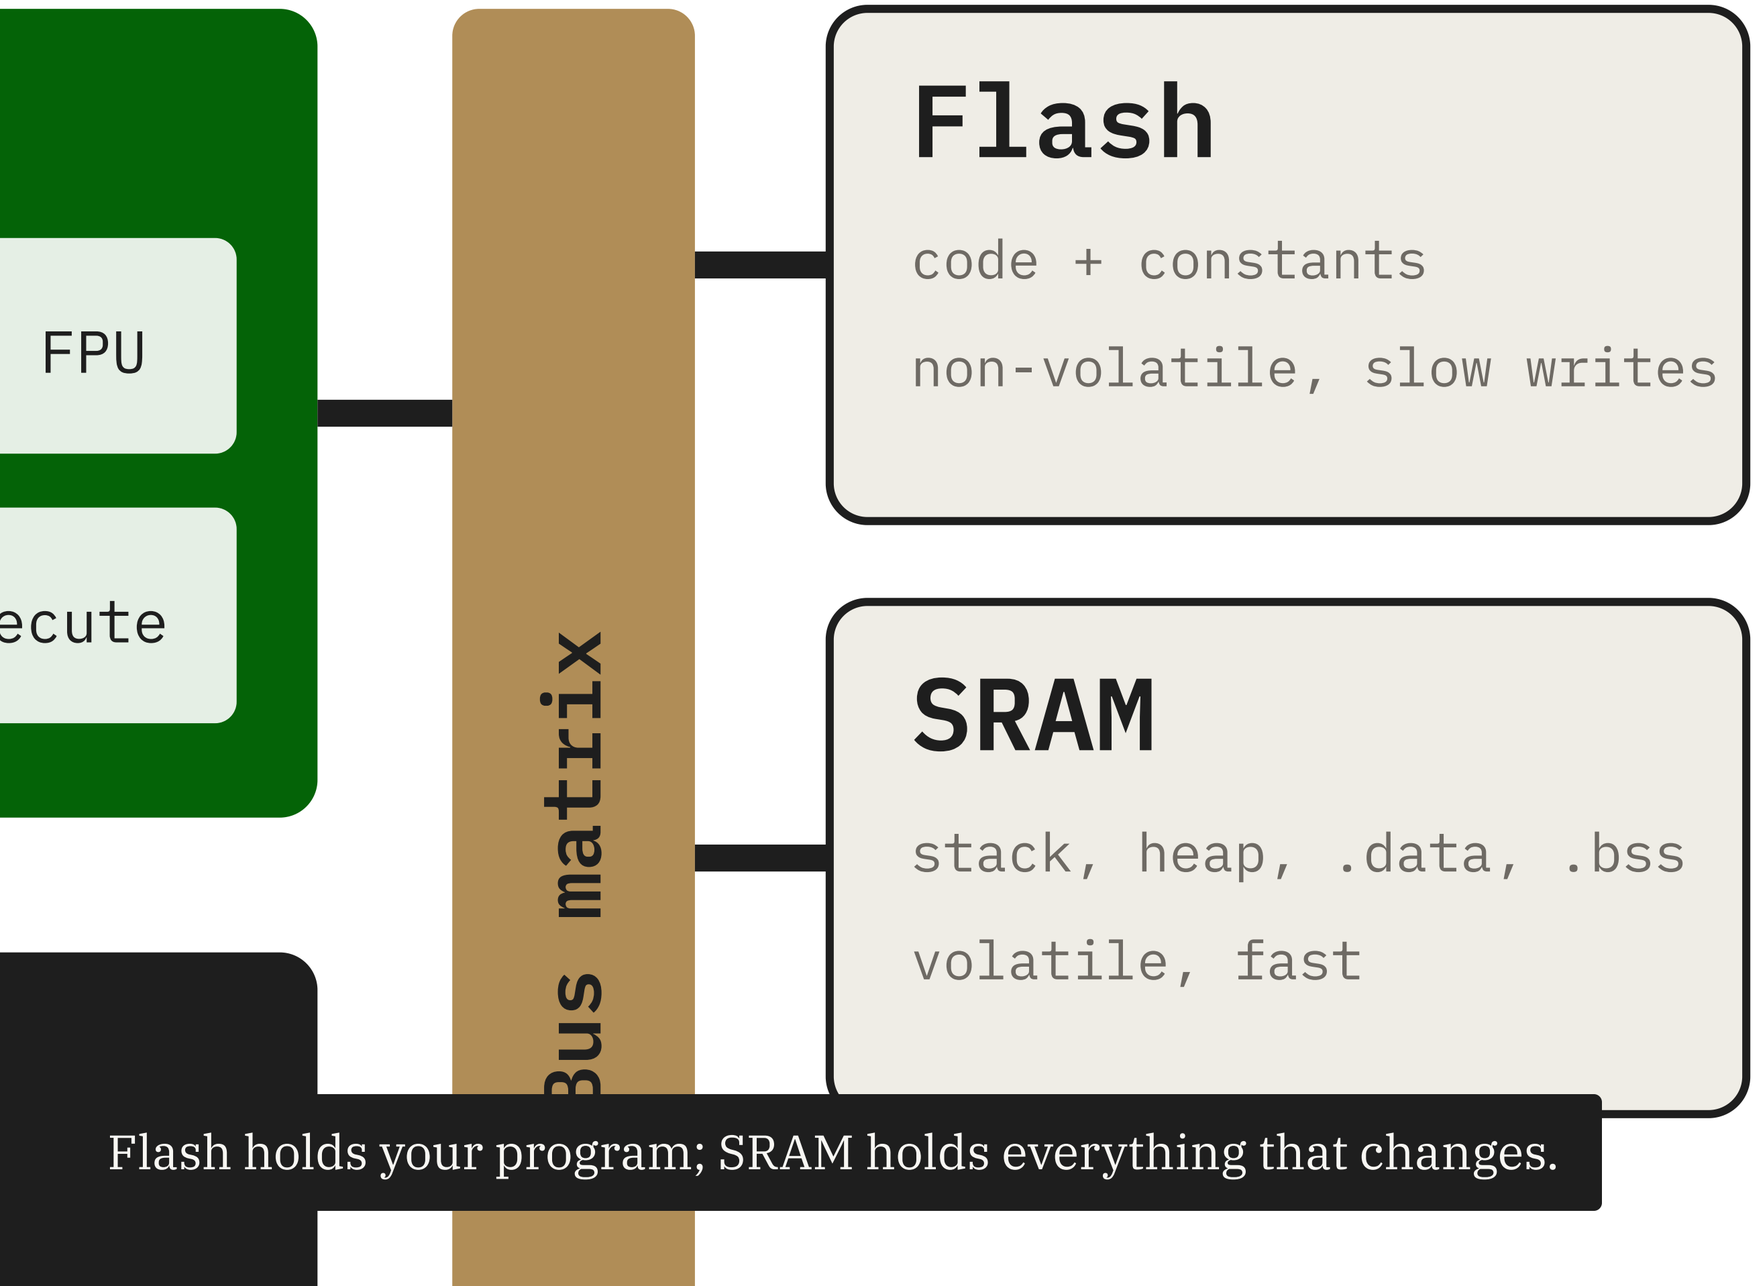

Flash holds your program; SRAM holds everything that changes.

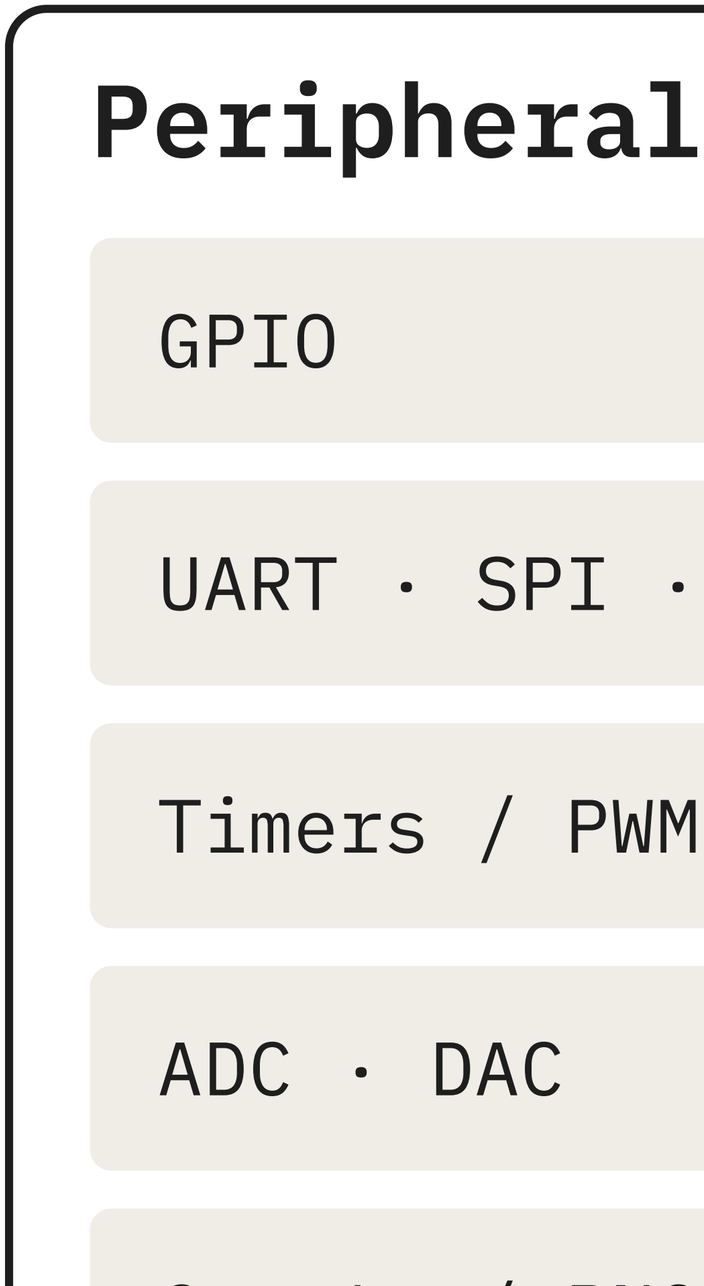

Inside a microcontroller

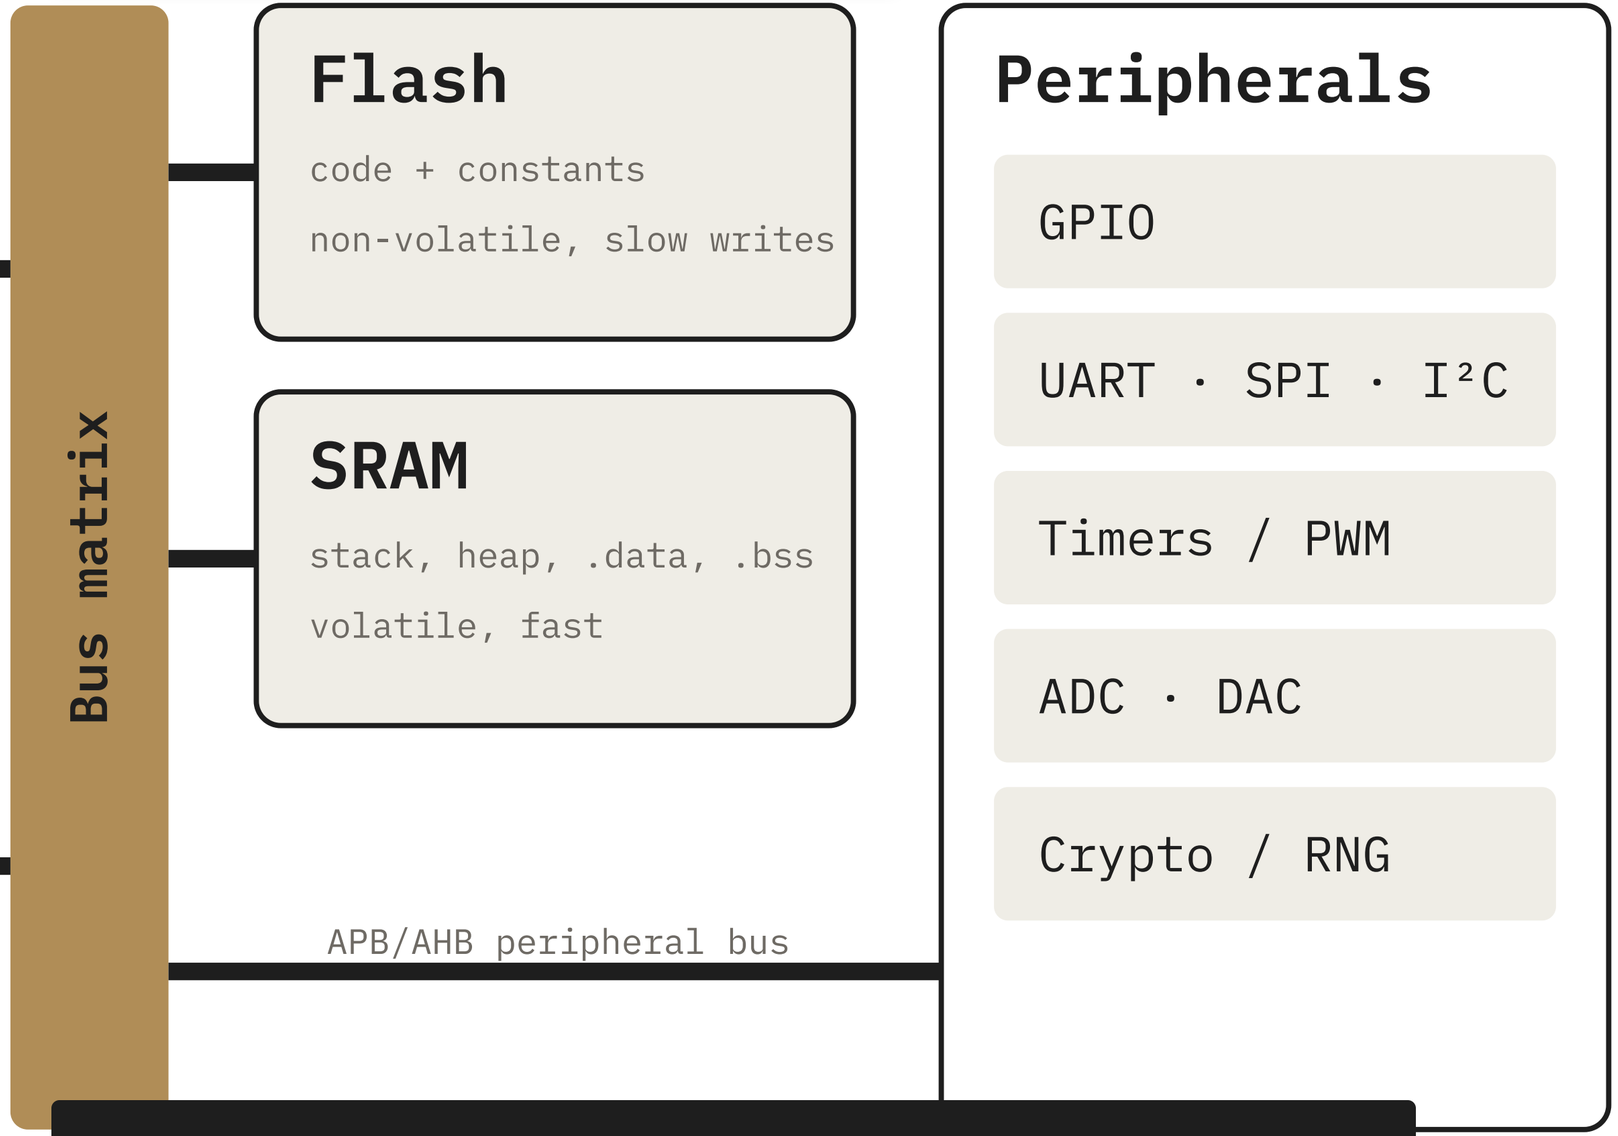

Peripherals are just memory addresses with side effects.

Inside a microcontroller

Debug port

SWD / JTAG

halt · step · read any address

← an attacker's favorite door

Bus mat

And the debug port can read all of it — unless you lock it.

Backgrounds are per-slide attributes

Add `{data-background-color="#046307"}` or `{data-background-image="photo.jpg"}` to any slide heading.

Text colors flip **automatically** on dark backgrounds.

Questions?