
SMT PRINTED CIRCUIT BOARD JUMPERS


AVAILABLE ON TAPE AND REEL

- Designed to link circuit board traces in applications where thru hole jumpers are not possible
- All conductive polystyrene carrier meets ANSI/EIA-481 standard
- Low profile/space saving design
- Minimal PCB footprint

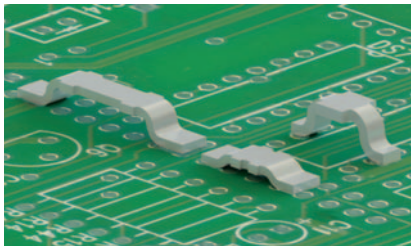


MATERIAL: .020 (.51) Copper, Silver Plate
Power Rating: 0.5 Watts at 158°F (70°C), with a current of 20 Amps and a connection temperature at 221°F (105°C or less)
Operating Temperature: -50°F to 185°F (-45°C to 85°C)

COMPACT




Mounting Detail




CAT. NO. 5100
CAT. NO. 5100TR - 500 pieces per reel

MICRO-MINIATURE




Mounting Detail




CAT. NO. 5102
CAT. NO. 5102TR - 500 pieces per reel

MINIATURE




Mounting Detail



CAT. NO. 5104
CAT. NO. 5104TR - 2500 pieces per reel

HIGH CURRENT "TRUE" ZERO OHM SMT JUMPERS

"True" Zero ohm high current SMT Jumpers, designed to replace Zero ohm resistors without changing board designs or layouts. These new devices are uniquely suited as true zero ohm resistor replacements.

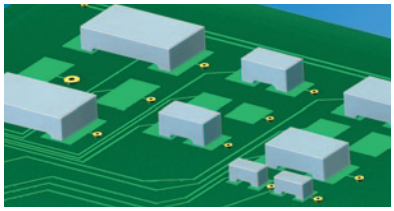


MATERIAL: Copper, Silver Plate
Power Rating: 0.5 Watts at 158°F (70°C), with a current of 20 Amps and a connection temperature at 221°F (105°C or less)
Operating Temperature: -50°F to 185°F (-45°C to 85°C)

Tape & Reel Spec's: 12mm Wide, 4mm Pitch, 1,000 pieces per 7" reel meets ANSI/EIA-481 standards


SUPPLIED ON TAPE AND REEL

0402 JUMPER




CAT. NO. 5112

0603 JUMPER




CAT. NO. 5110

0805 JUMPER



CAT. NO. 5106


1206 JUMPER



CAT. NO. 5108


THM JUMPERS

- Unique wave leg design retains jumper in thru hole for wave soldering
- May be used as a test point location
- Shorting Pin may be used in applications that require precise location of the legs
- May also be used with micro-jacks (see pages 108-109)




Operating Temperature: -50°F to 185°F (-45°C to 85°C)

.100 SPACING




MATERIAL: .020 (.50) Dia. Phosphor Bronze, Silver Plate

Mounting Detail




CAT. NO. 5025

.200 SPACING




MATERIAL: ..020 [.50] Dia. Phosphor Bronze, Silver Plate

Mounting Detail



CAT. NO. 5026

.200-.500 SPACING



CAT. NO.	A Dim.
1430-1	.200 (5.1)
1430-2	.250 (6.4)
1430-3	.300 (7.6)
1430-4	.400 (10.2)
1430-5	.500 (12.7)

MATERIAL: Brass, Gold Plate

Tel (516) 328-7500 • Fax (516) 328-1080
(800) 221-5510 • kec@keyelco.com
KEYSTONE®
RoHS COMPLIANT ~ ISO 9001 CERTIFIED
www.keyelco.com
55 S. Denton Avenue, New Hyde Park, NY 11040