
Assuming you’ve followed Nathan’s tutorial to generate a .sbp file in Aspire, follow this guide to cut your piece
Turn on the ShopBot by flipping switch to “up” position


Open ShopBot controls
Recycle Bin
11:22 PM
10/27/2025

If you do not turn on the machine before opening the controls, you will see this message. Choose “Quit and exit” and go back to step 1.

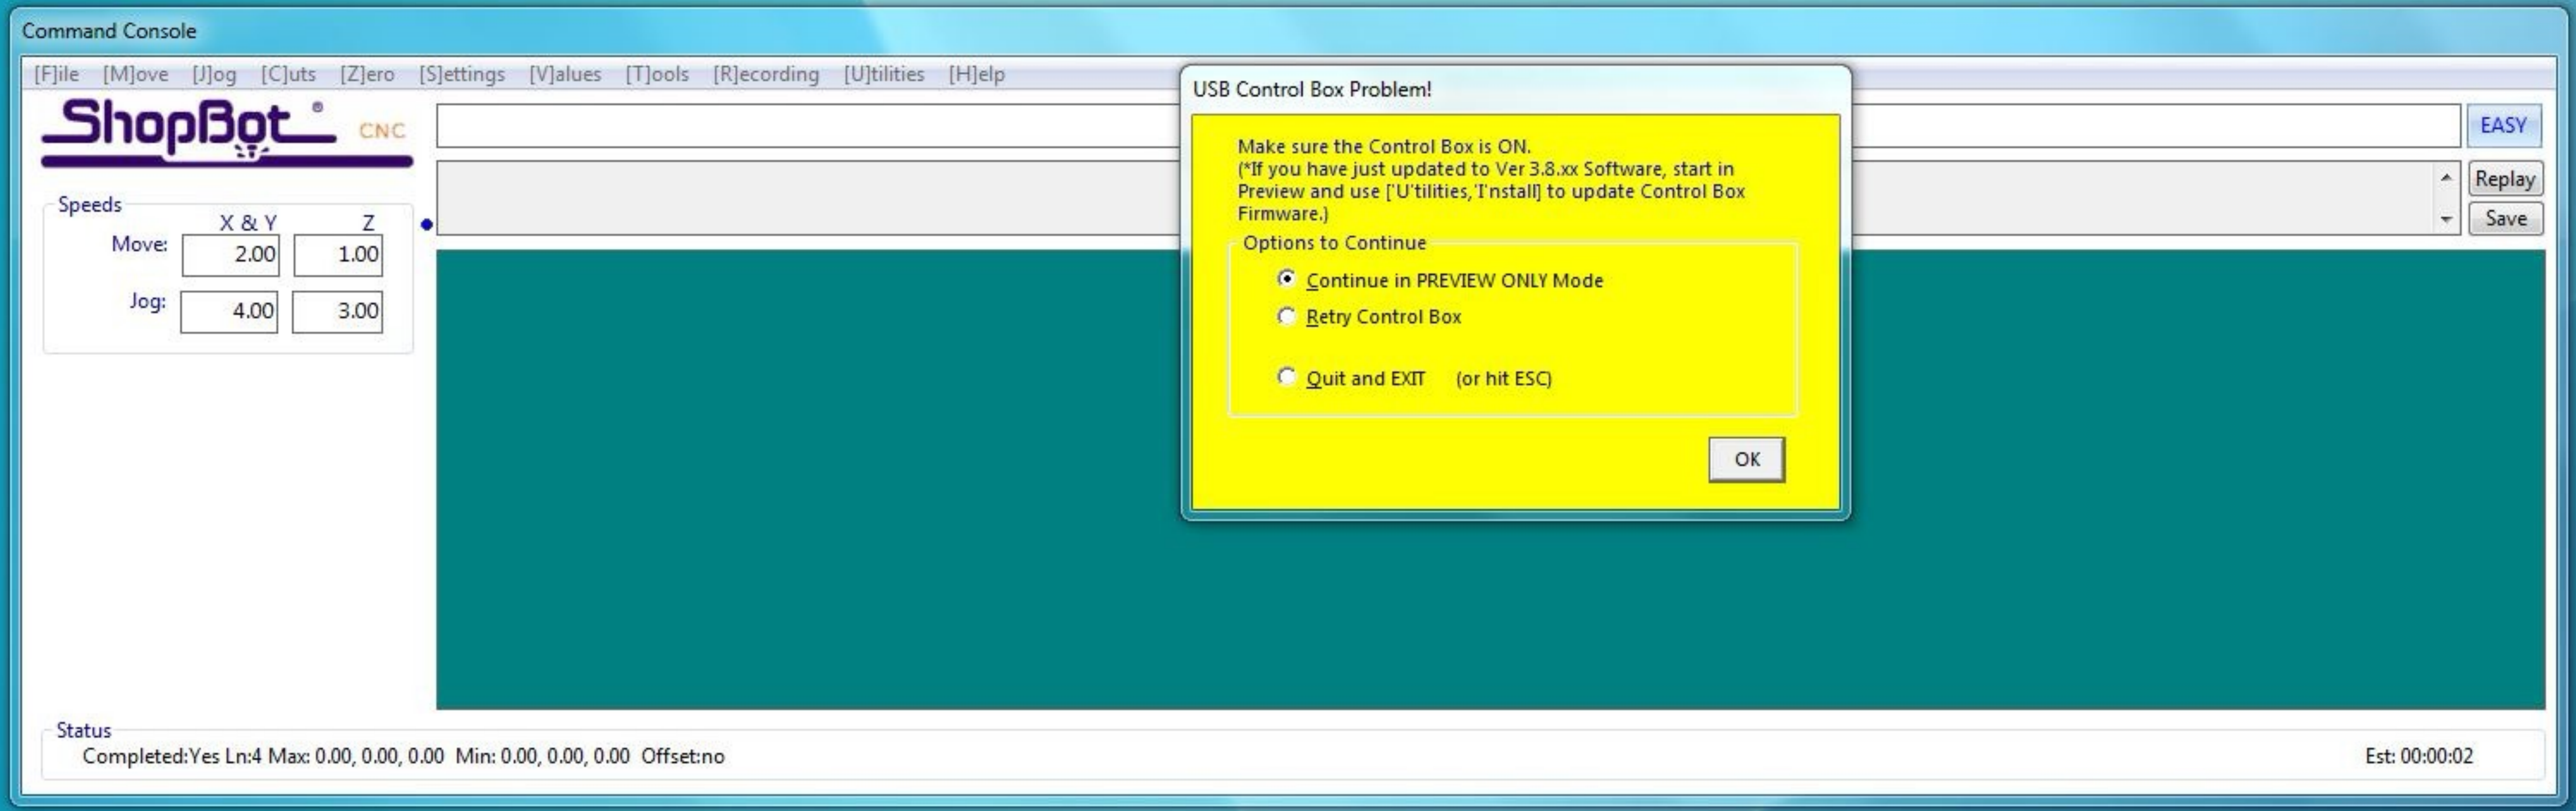

Ensure you are in Move/Cut mode


Click the yellow control panel
Position
X .000
Y .000
Z .787
Inputs
Outputs
Mode
Move/Cut
Preview
Cut Part
Command Console
[F]ile [M]ove [J]og [C]uts [Z]ero [S]ettings [V]alues [T]ools [R]ecording [U]tilities [H]elp
ShopBot CNC
EASY
Replay
Save
Speeds
X & Y
Z
Move: 2.00 1.00
Jog: 4.00 3.00
Status
Ready - Connected [Move/Cut Mode]
Est: 00:00:02
Recycle Bin
11:24 PM
10/27/2025

Use the controls to move the spindle to your desired x-y origin. However, leave it about 3cm above the surface so that you can perform an air cut first.

When finished, click “Zero Axes”

Check off all three axes and click “Zero”

Then close the yellow window

Click “Cut Part”

It will open up a window for you to select your .sbp file

Fill-In Sheet for [FP] Command
[FP]
[P]ART FILE LOAD
Parameter Name:
Value:
Required
Part File Name
Zzero.sbp
Offset in 2D or 3D
0 - No Offset
Proportion X
1.00
Proportion Y
1.00
Proportion Z
1.00
Tabbing
0 - Off
Parameters for 'templates' having just XY movements
Plunge (per repetition)
-0.00
Repetitions
1
Plunge from 0
0 - Off
Related Commands:
VB - to set TaBbing Values
VS - to set Speed Values
Click “Start”
Recall Last
Cancel
Position
X .000
Y .000
Z .000
Inputs
Outputs
Mode
Move/Cut
Preview
START
Command Console
[F]ile [M]ove [J]og [C]uts [Z]ero [S]ettings [V]alues [T]ools [R]ecording [U]tilities [H]elp
ShopBot CNC
Speeds
X & Y
Z
Move:
2.00
1.00
Jog:
4.00
3.00
Status
Ready - Connected [Move/Cut Mode]
Elapsed: 00:00:09
Recycle Bin
11:27 PM
10/27/2025


Turn the spindle on by rotating the key so it is sideways


>>>sample_shopbot_lo...
X .000 in
Y .000 in
Z .000 in
Inputs
Outputs
—Warning!—
Ready to Move ...!
Click STOP or Hit SpaceBar to Stop
STOP
Command Console
[F]ile [M]ove [J]og [C]uts [Z]ero [S]ettings [V]alues [T]ools [R]ecording [U]tilities [H]elp
ShopBot CNC
EASY
Replay
Save
Speeds
X & Y
Z
Move: 2.00 1.00
Jog: 4.00 3.00
FP, Zzero.sbp, 1, 1, 1, 1,
FP, sample_shopbot_logo.sbp, 1,
C:\SbParts\sample_shopbot_logo.s
Main File: 198-Lines [Prop: 1,
34 ' -this one has pauses to s
35 'Use v-bit, and 0 bit on sur
36 'Cutting file for ShopBot Lo
37 PAUSE 1
39 'User takes responsibility for the effects and outcomes of the use of this program.
40 PAUSE 1
41 'Test Run this program in Preview Mode and with air cutting above material to make
42 ' sure you are satisfied that it is doing what you expect it to do.
43 SO, 1,1 'turn on router
44 Pause 2
45 '
46 '----Tool Path Name Display in Preview
47 'Toolpath Name = Logo File
48 '----Tool to Use for Display in Preview
NOW STARTING ROUTER/SPINDLE !
Click OK to Start Router/Spindle and Run PartFile. Cancel to terminate.
Now.]
Cancel
OK
Click "Ok"
Status
Loading: sample_shopbot_logo.sbp
Recycle Bin
11:28 PM
10/27/2025

Check that the air cut is ok, i.e. not hitting another piece or going off the edge. If not, go back and re-set origin.

Click “Stop” once satisfied. Then click “Quit”

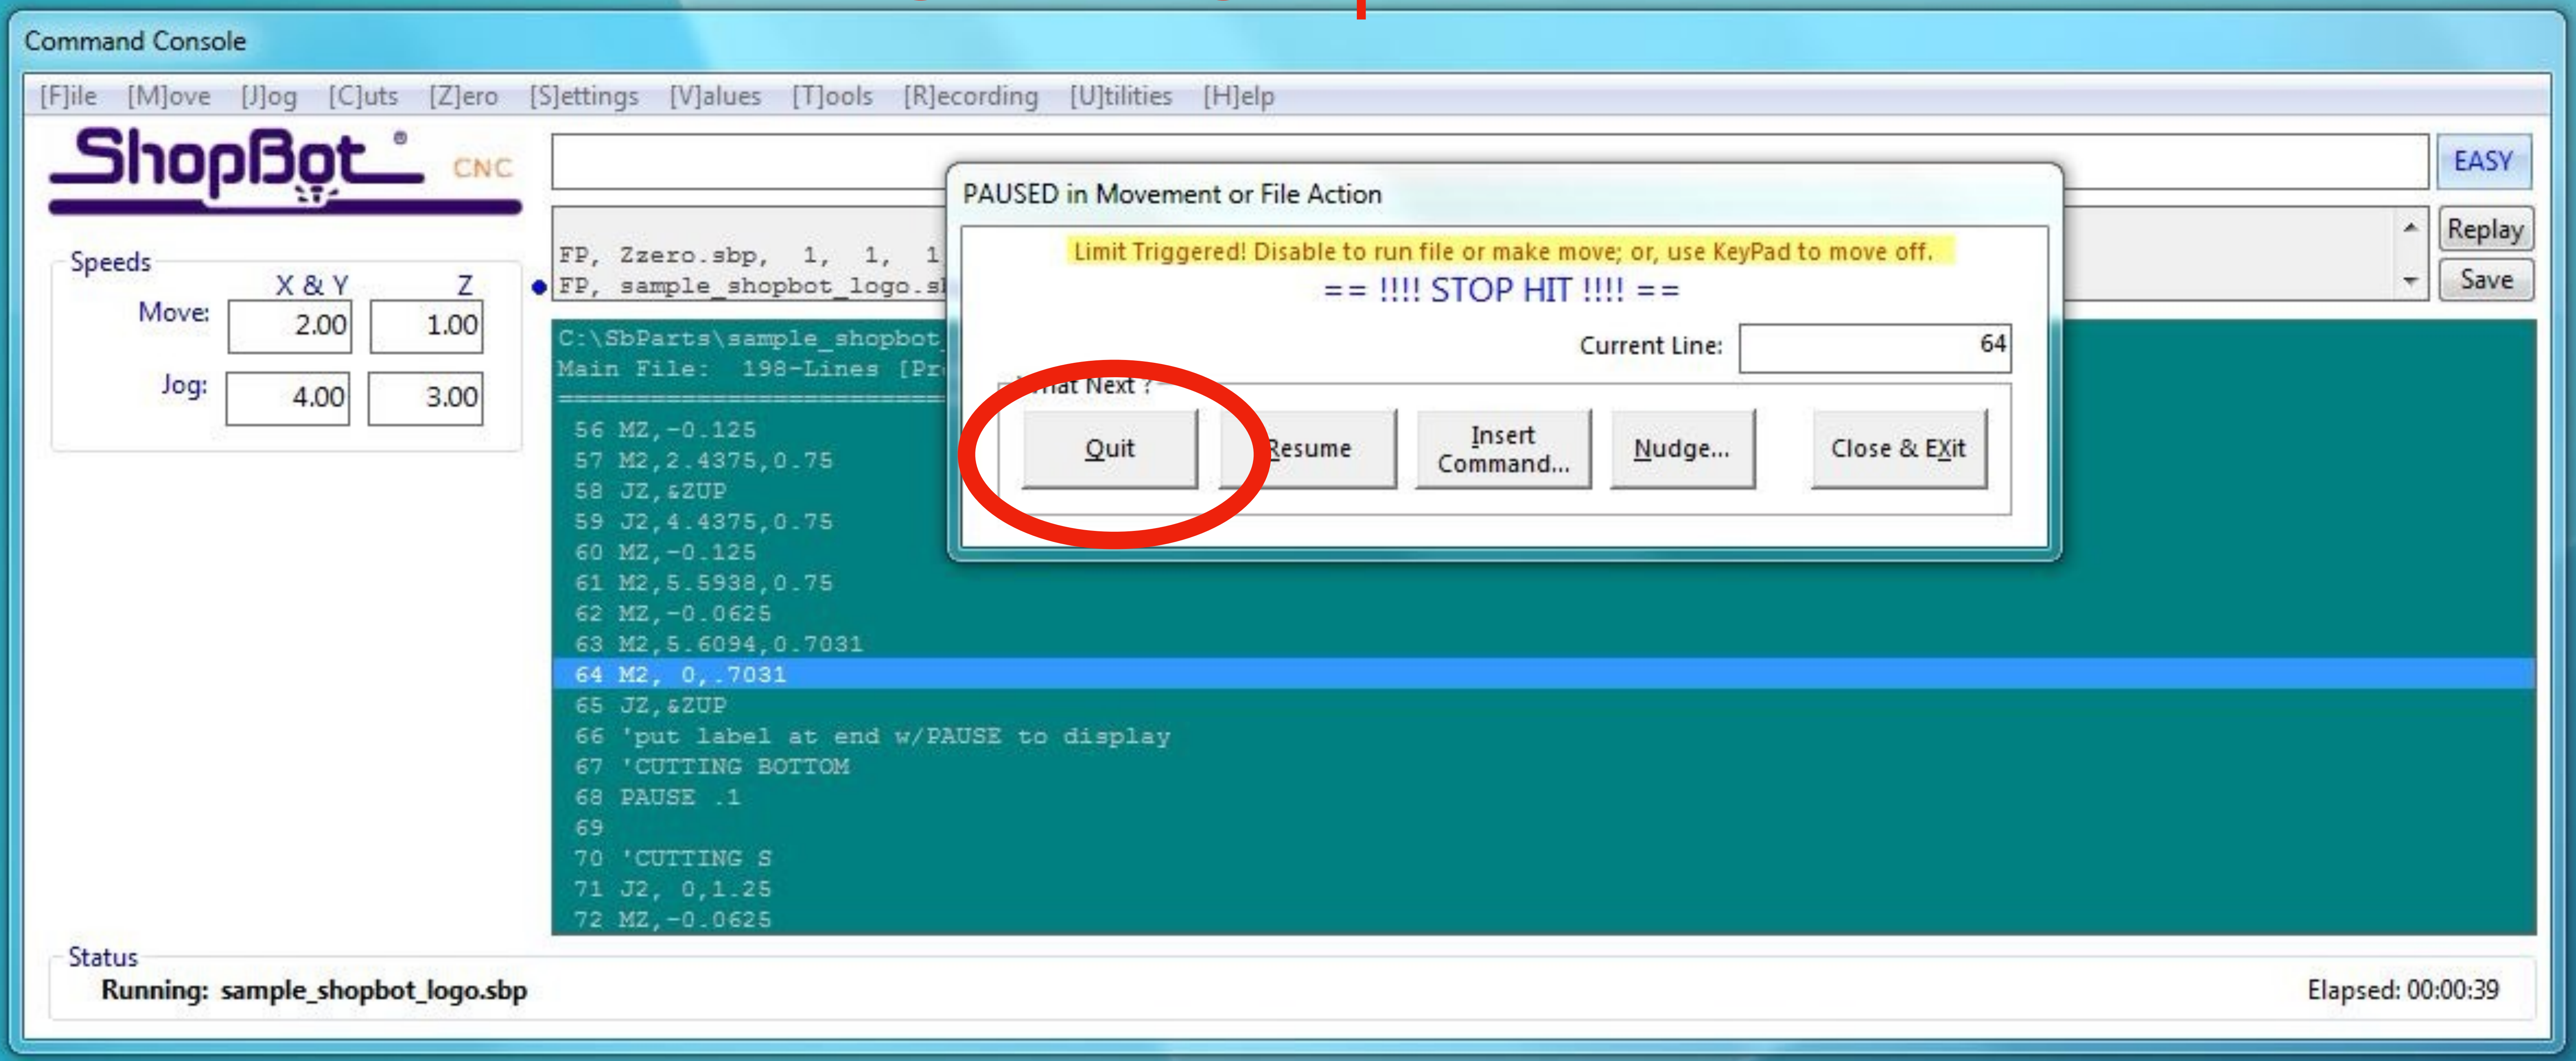

Open the controls again and level the z-height using fixed intervals

When the spindle is just barely touching the surface (can do paper test as well), click “Zero Axes”

This time, only zero the Z-axis

Close the yellow window and follow the same process as before to cut your piece


After your piece is done, remember to
vacuum. The “on” switch is located here
RIDGID
⚠WARNING
• For your own safety, read and understand owner's manual.
• Do not run unattended.
• Do not pick up hot ashes, coals, toxic, flammable or other hazardous materials.
• Do not use around explosive liquids or vapors.
I ON
O OFF


Turn off spindle and machine