




Topro 170

GEN 3

ENDURO FRAMESET

User Manual

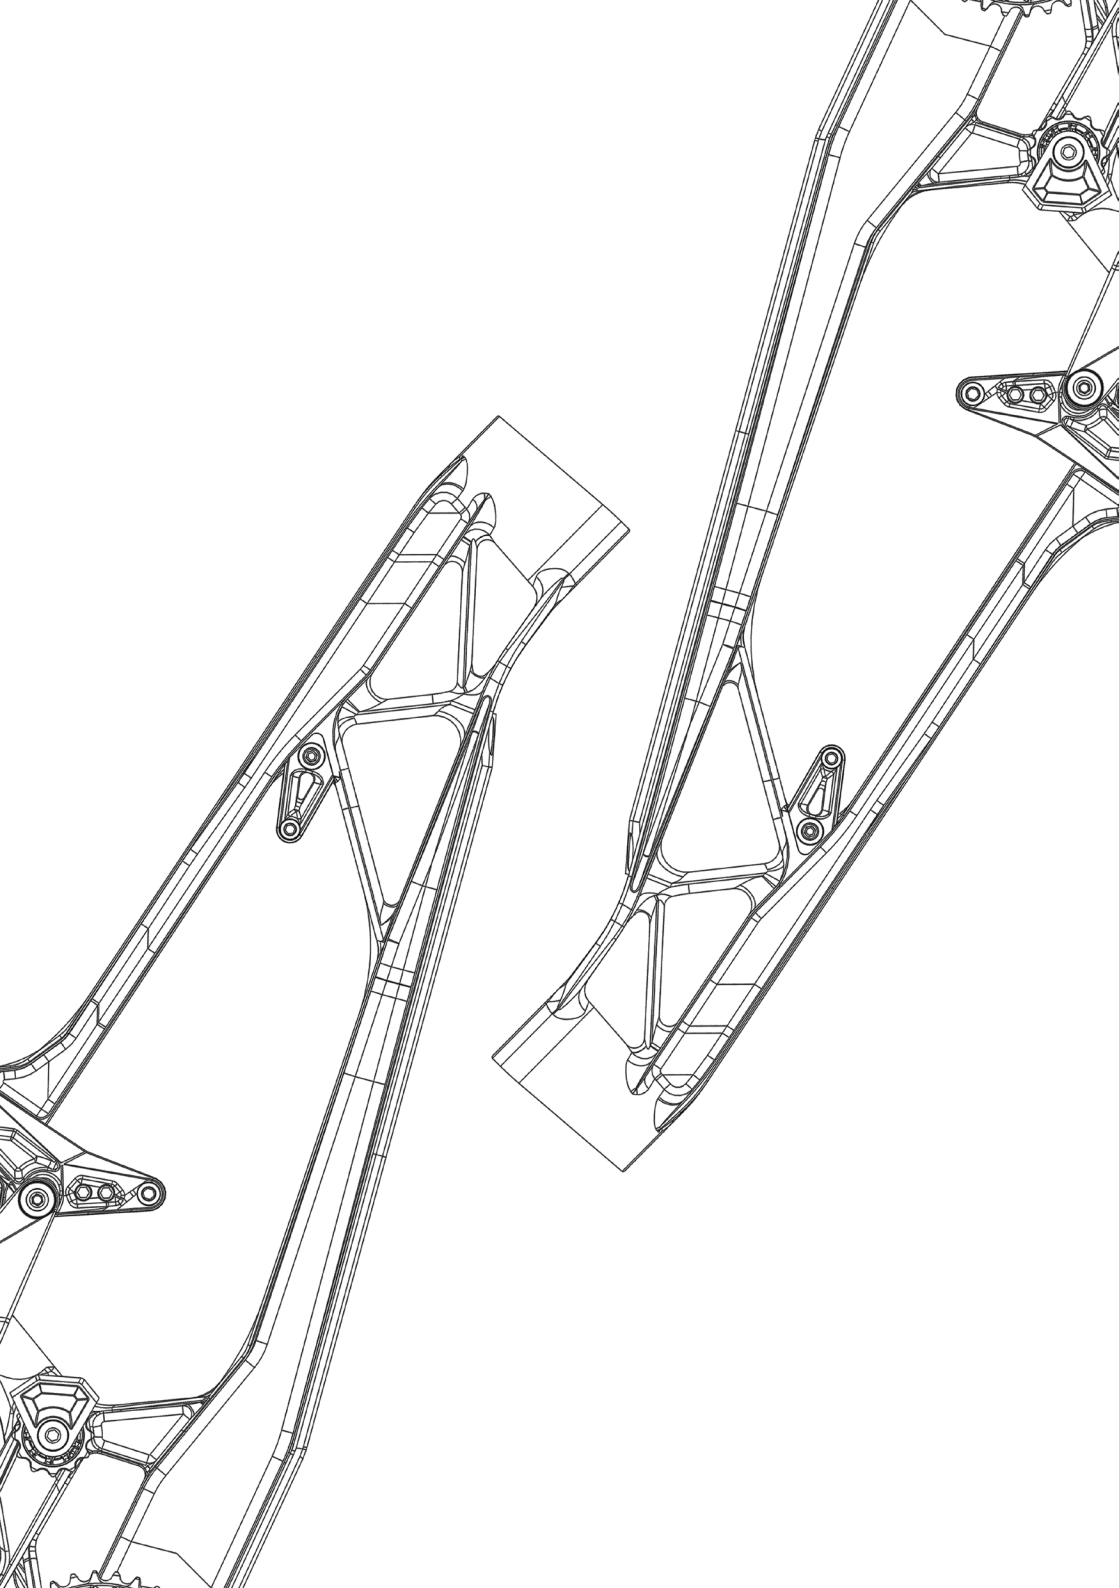

Innovation is nothing without the
people bold enough to embrace it.
Thank you for seeing the value in what we
are building.

You are the reason we push boundaries.
You are the reason we refuse to settle.
Thank you for coming along for the ride.

CONTENTS

RIDER SAFETY & RISK AWARENESS

Understanding the Ride
Understanding Impact Forces
Additional Unpredictable Severe Impacts Scenario

01
02

OPERATIONAL PROTOCOLS

The "Ready-to-Ride" Ritual
Assembly & Professional Care
Operational Range & Environmental Limits

03
04

TECHNICAL SPECIFICATIONS

General Technical Information	Component Specification (Rear)
Full Frameset Explode View	Flip Chip Guide
Front Frame Explode View	Suspension Kinematics
Component Specification (Front)	Bike Geometry
Rear Frame Explode View	Cable Routing

05
19

LIMITED WARRANTY & CLAIM ADJUDICATION

The Evok Economics & Engineering Standard	The Defect vs. Misuse Clause
Problem Solving & Rider Support	The "Custom Configuration" Clause
"Small Issues" - Noise, Wear & Cosmetics	The Mandatory Investigation Protocol
"Big Issues" - Structural Concerns	Returns & Restocking (30-Day Policy)
Sustainability, Liability & Investigation	Warranty Resolutions (The Three Scopes)
Registration & Non-Transferability	Limitation of Liability (Customer Responsibility)
Defined Scope of Coverage (The "5-Part" Rule)	

20
23

MAINTENANCE & SERVICE

Preserving Performance & Operational Integrity
Pre-Ride Inspection
Frame Service Interval Schedule
Full Frameset Disassembly Guide
Pivot Bearings: MAX Series Requirement
Torque Specifications

24
27

Note: Flip to different strips for corresponding sections.

EVOK DESIGN OWNER'S MANUAL:

SECTION 1 - RIDER SAFETY & RISK AWARENESS

1.1 Understanding the Ride

Your **safety** is our primary concern. We have engineered this frame to exceed industry impact standards using proprietary reinforced composites. However, we want you to ride with **full awareness**: no material is completely impervious to destruction. High-velocity gravity sports are inherently hazardous. By riding this bike, you acknowledge these risks. Our goal is to ensure you understand the limits of physics so you can push your limits safely.

1.2 Understanding Impact Forces

While Evok Design frames are built to withstand the immense vertical loads of competitive downhill riding, they cannot defy the laws of physics during uncontrolled crashes. We classify these events as Unpredictable Severe Impacts because they generate force that exceed the physical limitations of any design and material. To help you preserve your equipment, be aware of these specific high-risk scenarios which fall outside our warranty coverage:

- **Frontal Impacts** ("Over-the-Bars"): In these events, the rider's mass rotates forward, applying massive leverage to the head tube that is perpendicular to the frame's design load. We have added additional reinforcement to prevent the frame from damage; however, damage here is due to extreme leverage.
- **Direct Impact** ("Casing"): If the chainstays or bottom bracket strike an object (like a rock or landing lip), this is a concentrated point-impact that the frame structure is not designed to resist.
- **Side Impact** ("Washing Out"): Frames are optimized for vertical stiffness. Sliding into an object sideways applies transverse loads that can crush structural beam.
- **Uncoupled Impacts** ("Ghost Riding"): When a rider separates from the bike, the bike becomes an unguided projectile. Damage sustained when you are not in control of the bike is considered negligence.

1.3 Additional Unpredictable Severe Impacts Scenario

We have identified additional specific scenarios where the forces applied simply overwhelm modern suspension and frame technology. Avoiding these will keep you and your bike safe.

Flat Landing (>1.2 Meters):

The Reality: Your suspension is designed to absorb massive impacts provided there is a transition (slope) to help dissipate the energy.

The Limit: Dropping to a flat surface from a height greater than 1.2 meters creates a "hydraulic lock" effect. The suspension fully compresses instantly and becomes a solid rigid strut. This transfers an infinite spike of energy directly into the frame, which can cause structural failure. Always aim for a transition.

Lateral Environmental Impact (Stationary Object Strike):

The Reality: Losing directional control in complex terrain often results in the frame colliding with stationary hazards.

The Limit: Striking the side profile of the frame against a tree, rock, wall, stair set, pole, or wooden feature applies a concentrated crushing force. Our frame structure is engineered to support massive rider loads, but it acts like a thin-walled shell against direct lateral impacts. Dents or cracks in the side of the beam are evidence of environmental collision, not structural inadequacy.

We recommend using frame protection bumpers to mitigate this common risk.

Off-Axis Landings ("Whip" Failure):

The Reality: Landing sideways after a jump (a "whip" that didn't come back).

The Limit: Landing with the rear wheel more than 45 degrees off-center creates a massive torsional (twisting) load on the rear triangle and pivots. While our frames are laterally stiff, they are not designed to land nearly perpendicular to the direction of travel.

EVOK DESIGN OWNER'S MANUAL:

SECTION 2 - OPERATIONAL PROTOCOLS

2.1 The "Ready-to-Ride" Ritual

To ensure your safety and the structural integrity of your machine, we require a mandatory Pre-Operation Inspection before every ride. Gravity riding subjects your bike to extreme forces, and damage can occur even during transport.

The 5-Point Safety Check: ✓

Visual Scan: Check the surface for coating breaches, stress discoloration, or deformation, paying close attention to bonding areas.

Hardware Check: Inspect linkages and axles. Ensure there are no signs of forced manipulation or tool marks.

Acoustic Test: Gently drop the bike from 2 inches. A rattle or dull thud indicates loose components or structural issues.

Torque Check: Verify all fasteners match the specifications in Technical Specification section. Riding with loose hardware is dangerous and constitutes neglect.

Alignment: Ensure the rear triangle and wheels are perfectly aligned to rule out prior severe impacts.

Important: If you find any anomaly, **DO NOT OPERATE** the bike.

2.2 Assembly & Professional Care

To ensure it performs as designed, we **strongly recommend** having a professionally trained technician assemble the full bike.

Torque Precision: We use specific torque settings. Tightening variations of even 10% can compromise safety.

Modifications: Please do not file, drill, or chemically strip the frame, as this compromises the structure.

Components: Use only reliable components from well-known manufacturer. Exceeding suspension travel limits alters the geometry and stress risers, which may damage the frame. Crashes that were caused by component malfunctions are not considered as frame defects.

2.3 Operational Range & Environmental Limits

To guarantee the performance of the Optimized Structural Matrix and ensure the suspension kinematics function as intended, the operator must adhere to the following physical limits. Operating the chassis outside these parameters compromises the safety factors engineered into the frame.

Maximum System Weight (135kg / 297lbs):

The chassis is tuned for a specific flex profile. The total combined weight of the Rider + all equipment must not exceed 135kg. Exceeding this limit over-saturates the suspension dampers and subjects the structural beam flanges to cyclic loads beyond their fatigue rating.

High Heat Condition:

High Heat: Do not store the bike in direct sunlight inside a vehicle or enclosed space where temperatures exceed 60°C (140°F). Extreme heat can affect the temper of composite resins and hydraulic seals.

Low Temperature Conditions: Avoid high-impact riding in temperatures below -10°C (14°F). At these temperatures, hydraulic fluids thicken (causing "spiking" in the suspension) and materials become less ductile, increasing the risk of brittle fracture during impact.

Corrosive Environments:

If the bike is operated in coastal (salt air) or winter road (salt/magnesium chloride) environments, it must be washed with fresh water immediately after use. Corrosion of the alloy pivot inserts caused by salt accumulation, humidity, and corrosive chemical substance is classified as Neglect, not a warranty defect.

Transport & Shuttle Protocol:

Shuttle Abrasion: When transporting the bike on a tailgate pad or chairlift hook, ensure the bike is properly positioned. Structural damage caused by repetitive abrasion (rubbing) against a truck tailgate or another bike during transport is not a riding failure.


EVOK DESIGN OWNER'S MANUAL:

SECTION 3 - TECHNICAL SPECIFICATIONS

GENERAL TECHNICAL INFORMATION


UNIT:MM

 BIKE TYPE SUPER ENDURO	 REAR TRAVEL LENGTH 170-190	 RECOMMEND FORK TRAVEL 170-200
 FRAME MATERIAL 7075-T651	 REAR SHOCK DIMENSION 230x57.5-65	 HEADSET DIMENSION ZS44/56
 REAR WHEEL COMPATIBILITY 27.5/29IN	 SHOCK BUSHINGS Front 25x8 Rear 30x8	 GEOMETRY ADJUSTMENT 2 position
 DERAILLEUR HANGER UDH	 SAG RECOMMENDATION 30-35%	 REAR ROTOR DIMENSION 200/max223
 SEATPOST DIMENSION 31.6/ Clamp34.9	 SEATPOST INSERTION LENGTH $260 + [(reach-443) \times 0.72]$	 BOTTOM BRACKET TYPE BSA 100
 FRAME WEIGHT 5kg	 REAR HUB DIMENSION 148x12	 SHOCK COMPATIBILITY Air/Coil
 MAX TIRE COMPATIBILITY 27.5x2.7IN 29x2.4IN	 CHAIN RING COMPATIBILITY 32-34t	 PIGGY BACK SHOCK Compatible
 CABLE ROUTING Concealed External	 CRANKSET DIMENSION Dub SB+	 CHAINRING OFFSET 24

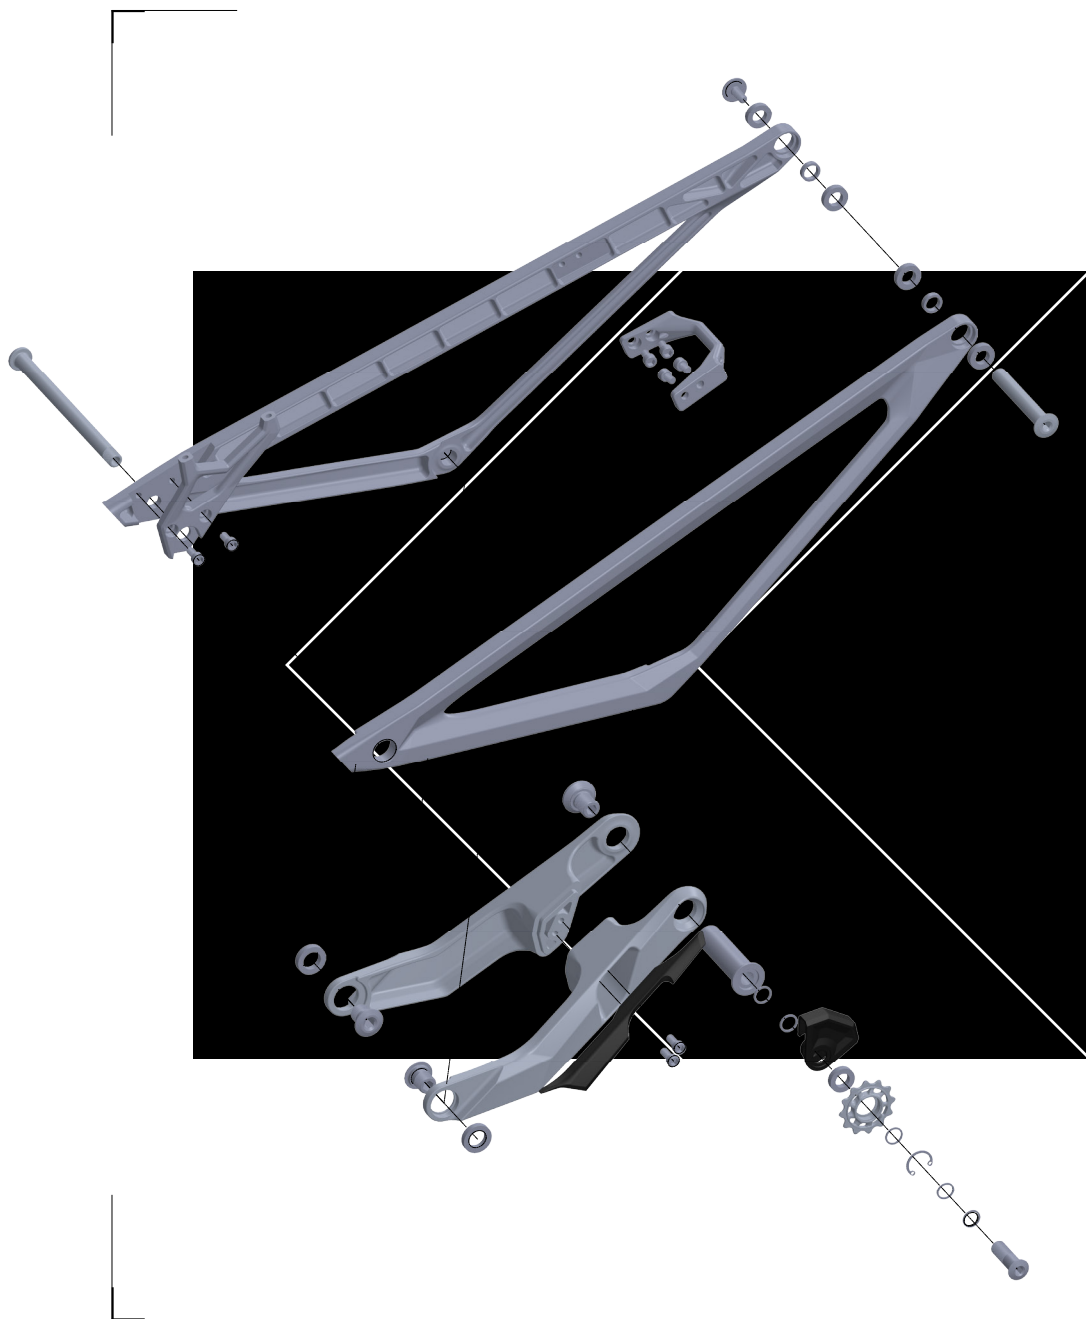


FULL FRAMESET EXPLODE VIEW

// 21 Main Components
28 Bolts and Axles
11 Bearings
7 Spacers

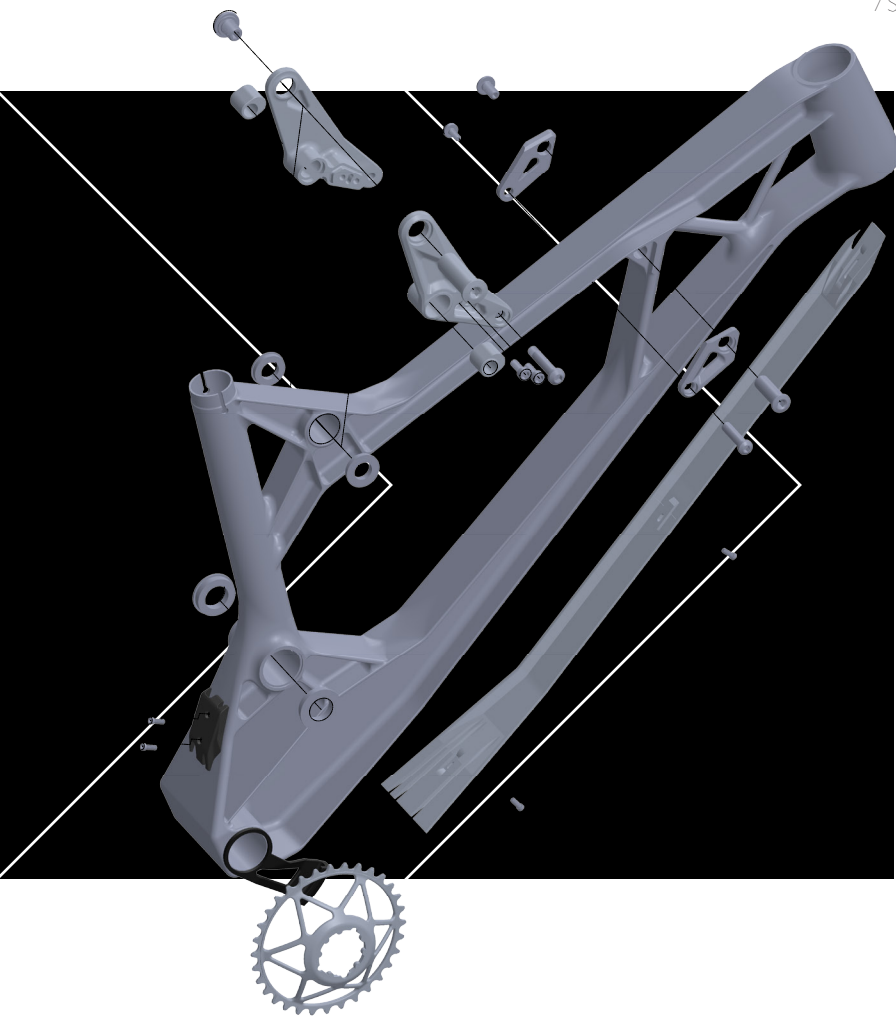


FRONT FRAME EXPLODE VIEW

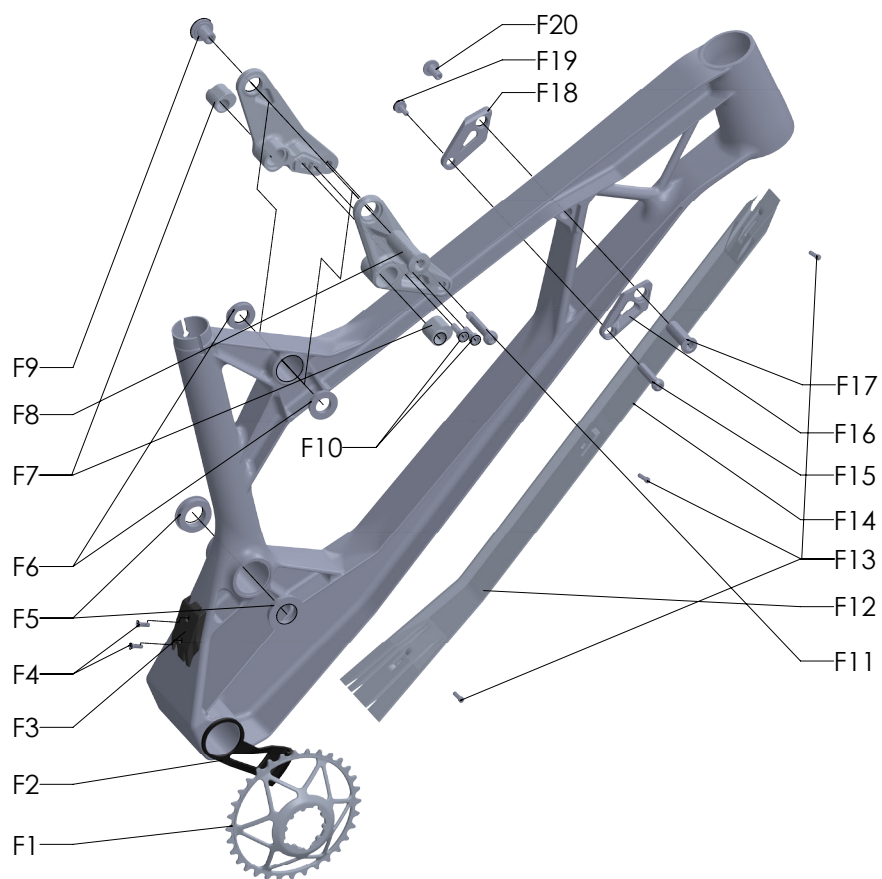

COMPONENT SPECIFICATION

S.NO	COMPONENT NAME	TORQUE	GREASE	THREAD LOCKER
F1	24mm Offset 32t Chainring	9N/m	● grease crank arm	● on thread
F2	Chainring Chain Retainer	N/A	● no grease	● no thread locker
F3	Front Triangle Cable Manager	N/A	● no grease	● no thread locker
F4	Cable Manager Fixing Bolts	2.5N/m	● no grease	● on thread
F5	LowerLink-Front Pivot 6804 Flanged Bearings	N/A	● grease inner ring	● on outer ring
F6	UpperLink-Front Pivot 6803 Flanged Bearings	N/A	● grease inner ring	● no thread locker
F7	UpperLink Flip Chips	N/A	● grease contact surface	● no thread locker
F8	UpperLink-Front Pivot Axle	20N/m	● grease contact surface	● on thread
F9	UpperLink-Front Pivot Bolt	20N/m	● no grease	● on thread
F10	UpperLink Connection Bolts	7.8N/m	● no grease	● on thread
F11	Rear Shock Eye Bolt	10N/m	● grease contact surface	● on thread
F12	Lower Cable Case	N/A	● no grease	● no thread locker
F13	Cable Case Fixing Bolts	2.5N/m	● no grease	● on thread
F14	Upper Cable Case	N/A	● no grease	● no thread locker
F15	Front Shock Eye Axle	10N/m	● grease contact surface	● on thread
F16	Right Shock Rack	N/A	● grease contact surface	● no thread locker
F17	Shock Rack Axle	16N/m	● grease contact surface	● on thread
F18	Left Shock Rack	N/A	● grease contact surface	● no thread locker
F19	Front Shock Eye Bolt	10N/m	● no grease	● on thread
F20	Shock Rack Bolt	16N/m	● no grease	● on thread

REAR FRAME EXPLODE VIEW

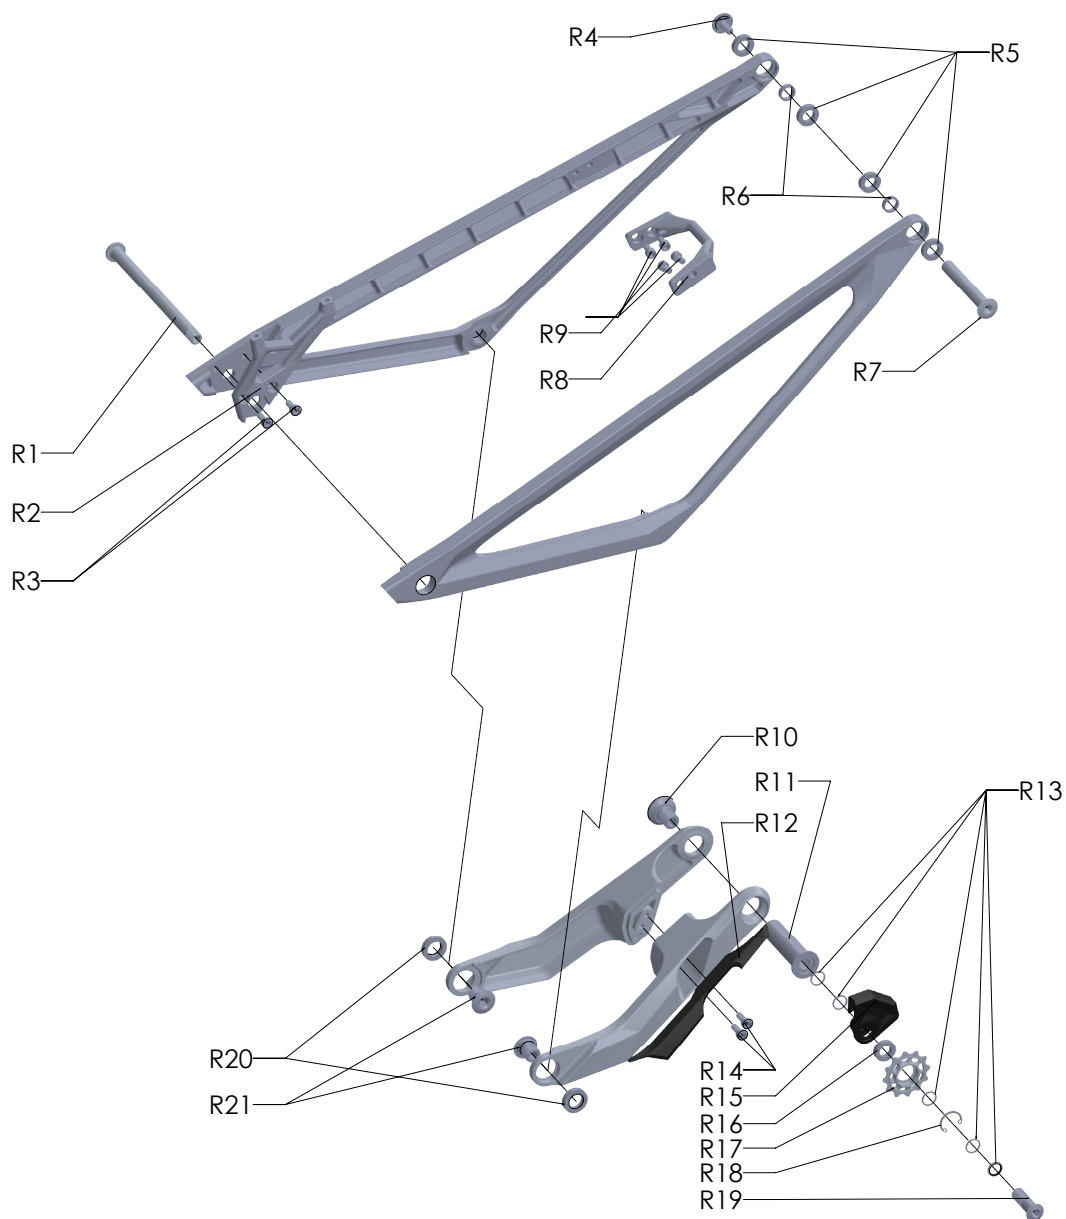


COMPONENT SPECIFICATION

S.NO	COMPONENT NAME	TORQUE	GREASE	THREAD LOCKER
R1	Rear Thru Axle	12N/m	● grease contact surface	● on thread
R2	Rear Brake Mount	N/A	● grease contact surface	● no thread locker
R3	Rear Brake Mount Bolts	N/A	● no grease	● no thread locker
R4	UpperLink-Rear Pivot Bolt	12.9N/m	● no grease	● on thread
R5	UpperLink-Rear pivot 6801 Bearings	N/A	● grease inner ring	● no thread locker
R6	UpperLink-Rear Pivot Spacers	N/A	● grease contact surface	● no thread locker
R7	UpperLink-Rear Pivot Axle	12.9N/m	● grease contact surface	● on thread
R8	Rear Triangle Link Bridge	20N/m	● grease contact surface	● on thread
R9	Link Bridge Fixing Bolts	7.7N/m	● no grease	● on thread
R10	LowerLink-Front Pivot Bolt	20N/m	● no grease	● on thread
R11	LowerLink-Front Pivot Axle	N/A	● grease contact surface	● on chamfer
R12	Chain Protector	N/A	● no grease	● no thread locker
R13	Idler Cog Spacer	N/A	● no grease	● no thread locker
R14	LowerLink Connection Bolts	7.8N/m	● no grease	● on thread
R15	Idler Cog Chain Guide	N/A	● no grease	● no thread locker
R16	Idler Cog Bearing	N/A	● grease inner ring	● no thread locker
R17	Idler Cog	N/A	● no grease	● no thread locker
R18	Idler Cog Bearing Retainer	N/A	● grease contact surface	● no thread locker
R19	Idler Cog bolt	8N/m	● grease contact surface	● on thread
R20	LowerLink-Rear Pivot Bearings	N/A	● no grease	● no thread locker
R21	LowerLink-Rear Pivot Bolts	25N/m	● grease contact surface	● on thread

FLIP CHIP GUIDE


Flip chip location

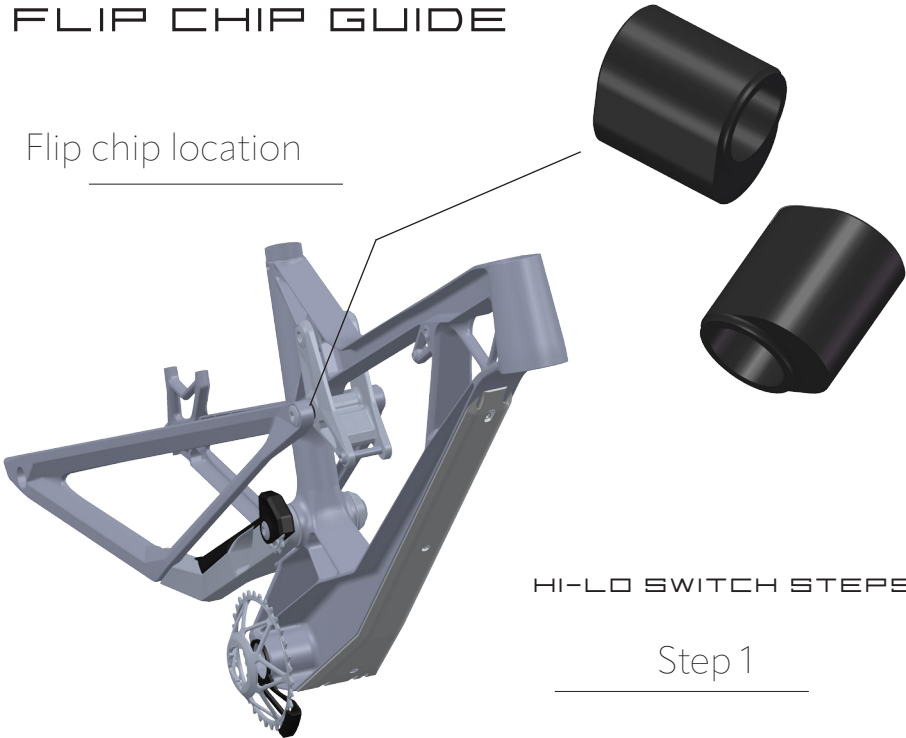

HI-LO SWITCH STEPS


Step 1

Remove R4 and R7

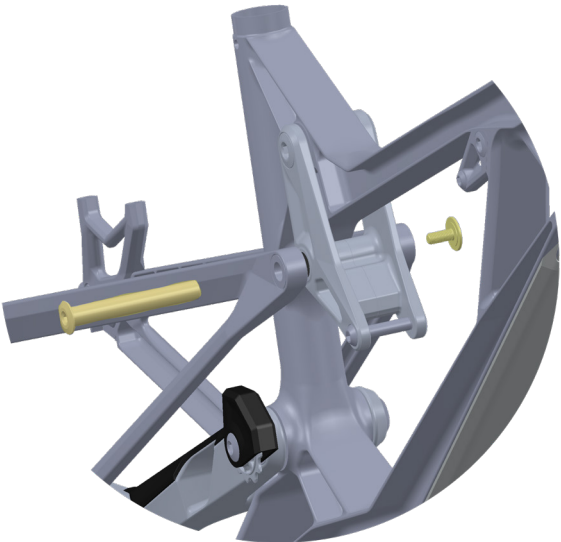


Step 2

Lift left and right rear triangles

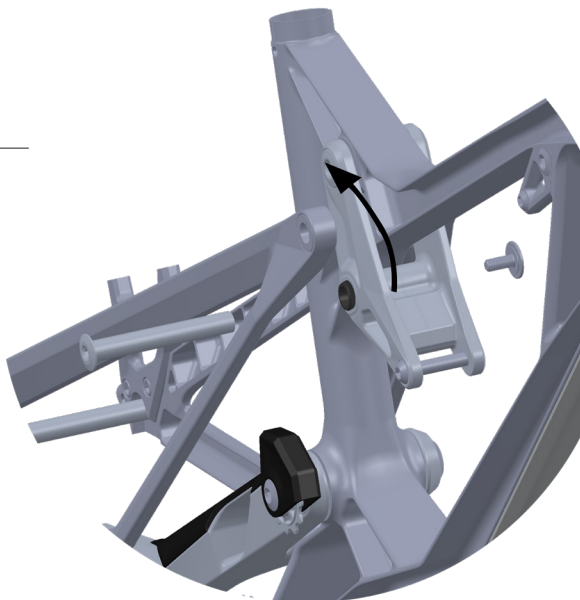

Step 3

Take out the flip chips

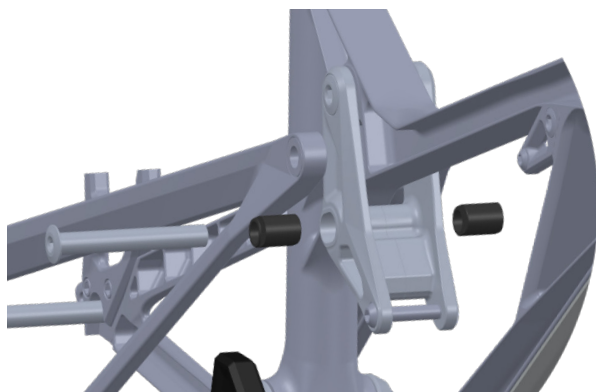

Step 4

Flip both flip chips



Step 5

Reassemble the linkage

HI 27/9 FLIP CHIP SETTING

Performance by Zone

Small Bumps (0-45mm): Ground-Hugging Sensitivity

Feel: This high leverage allows the wheel to move instantly, effectively "erasing" small chatter and braking bumps. The bike will naturally settle into its sag, offering exceptional traction.

Mid-Stroke (45-110mm): Active & Deep

Feel: The suspension remains active and willing to use travel. Instead of a firm platform for popping, it offers a "hunker down" feel that absorbs square-edge hits and roots effortlessly, keeping the rider stable.

End Stroke (110-170mm): Rapid Ramp-Up

Feel: As you approach bottom-out, the frame mechanically stiffens rapidly. This provides a progressive cushion that catches the rider softly on large drops, preventing harsh bottom-out even on linear coil shocks.


Travel/Stroke

57.5mm Stroke:
170mm Travel

60.0mm Stroke:
177mm Travel

62.5mm Stroke:
182mm Travel

65.0mm Stroke:
189mm Travel

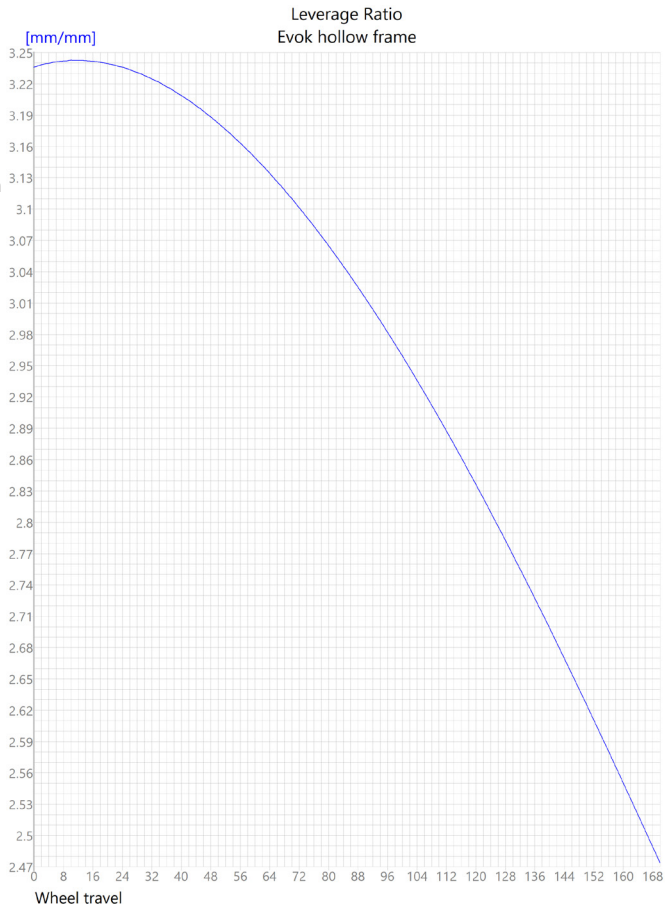

LO 29 FLIP CHIP SETTING

Performance by Zone


Small Bumps (0-45mm): Maximum Sensitivity

Feel: This high leverage allows the suspension to overcome friction easily, "erasing" trail chatter and delivering excellent traction in loose conditions.

Mid-Stroke (45-110mm): Deep & Active

Feel: The bike stays active deeper into the travel, prioritizing impact absorption over "pop." It will feel planted and stable through rough rock gardens and braking bumps.

End Stroke (110-170mm):
Extreme Ramp-Up

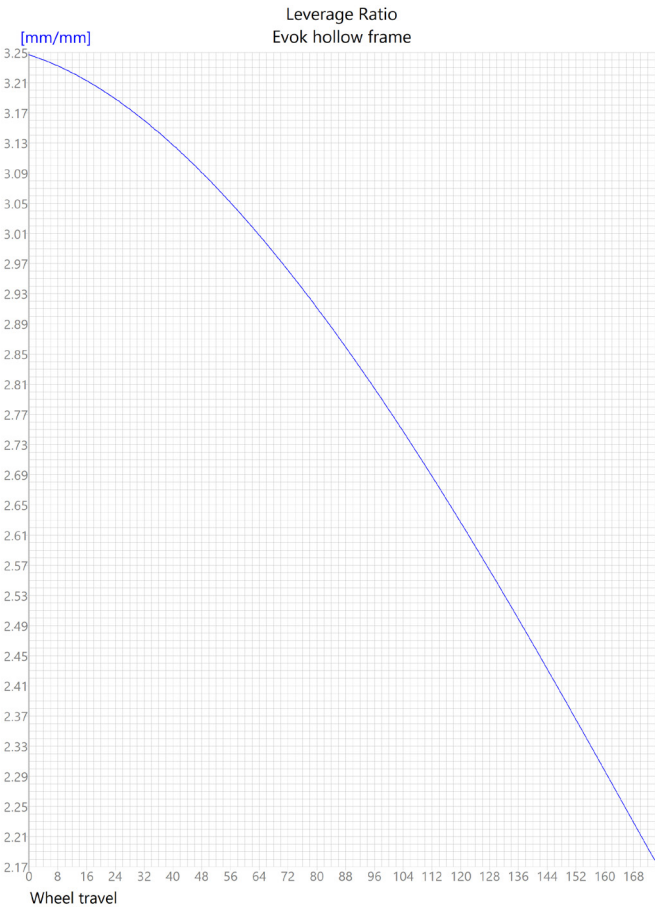

Feel: This creates a massive increase in force required to use the last millimeters of travel. It effectively eliminates harsh bottom-outs, even on the largest drops or flat landings.

Travel/Stroke

57.5mm Stroke:
163mm Travel

60.0mm Stroke:
170mm Travel

62.5mm Stroke:
174mm Travel

65.0mm Stroke:
179mm Travel

BIKE GEOMETRY

GEOMETRY ADJUSTMENT & FLIP CHIP PROTOCOLS

The Evok frame features a 2-position Flip Chip located at the upper linkage. This system allows riders to modify the chassis geometry to suit specific wheel configurations and terrain demands. Changing the chip orientation alters the Head Tube Angle (HTA), Seat Tube Angle (STA), Bottom Bracket (BB) height, and Reach.

HIGH SETTING (Agility & Mixed Wheel)

Recommended Configuration: 27.5" Rear Wheel (Mullet Setup).

--Geometry Effect: Raises the BB and steepens the Head and Seat Tube angles.


--Ride Characteristic: Because a 27.5" rear wheel naturally lowers the bike's rear axle, the High setting compensates by lifting the frame chassis. This maintains proper pedal clearance and creates a sharper, more responsive steering feel. The steeper seat angle places the rider in a dominant, upright climbing position.

LOW SETTING (Stability & Full 29")

Recommended Configuration: 29" Rear Wheel.

--Geometry Effect: Lowers the BB and slackens the Head and Seat Tube angles.

--Ride Characteristic: A 29" rear wheel naturally raises the rear axle; the Low setting compensates by dropping the chassis to keep the center of gravity low. This creates a "slacked out" geometry ideal for high-speed stability and steep descents, giving the rider a sensation of sitting "in" the bike rather than "on" it.

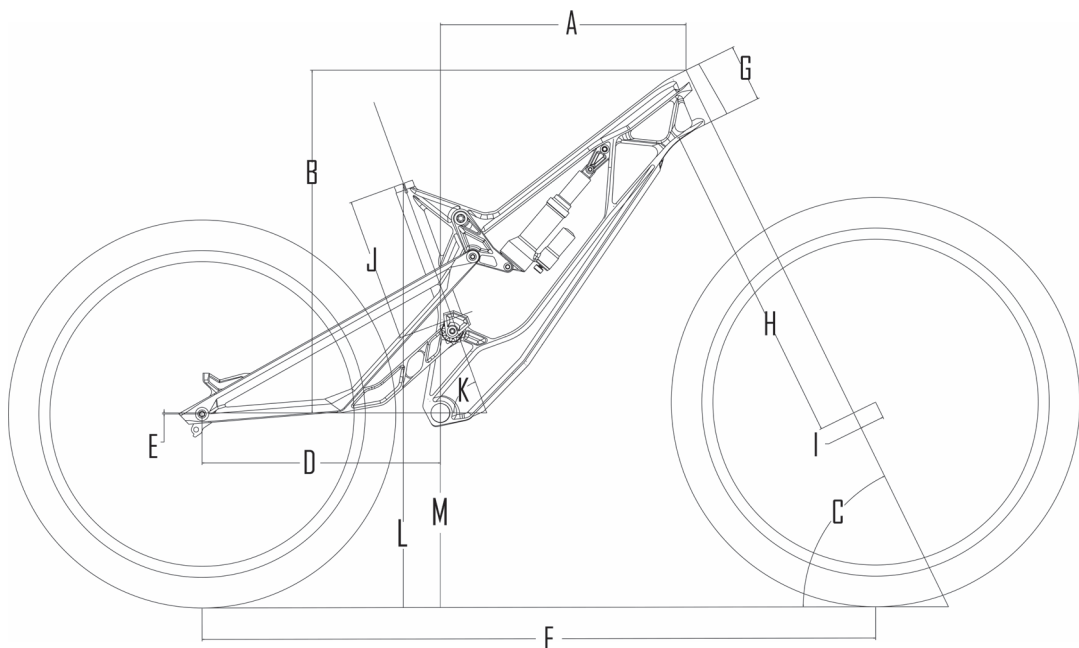

		MM/DEGREES			
		HI		LO	
		27.5	29	27.5	29
A	REACH	443	454	427	443
B	STACK	617	610.8	628	443
C	HEAD ANGLE	63.8	64.83	62.35	443
D	CHAINSTAY	430	429.6	441.8	443
E	BB DROP	+1.87	-5.86	-20.8	443
F	WHEEL BASE	1215.8	1215.7	1226.9	443
G	HEAD TUBE LENGTH	103	103	103	103
H	FORK LENGTH	584	584	584	584
I	FORK OFFSET	44	44	44	44
J	SEAT TUBE INSERT	260	260	260	260
K	SEAT TUBE ANGLE	70	71	68.55	69.44
L	SEAT HEIGHT	742	757	720	733.7
M	BB HEIGHT	348.7	362.4	328.5	340.7




Note: 443mm reach is used as a reference frame size to show the switching effects of the flip chip

CABLE ROUTING

CONFIGURATION-

Dropper left

Shifter, rear brake right

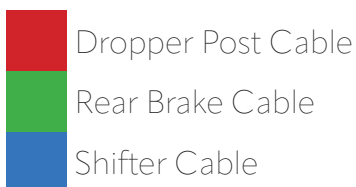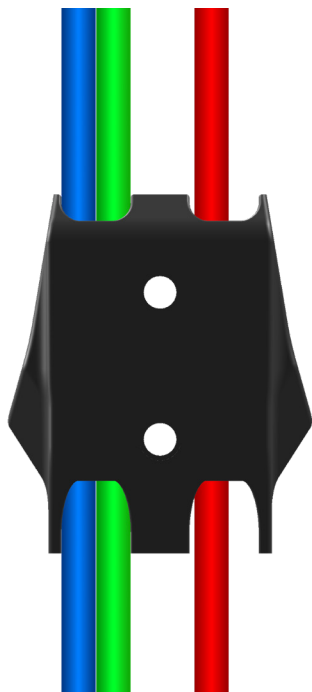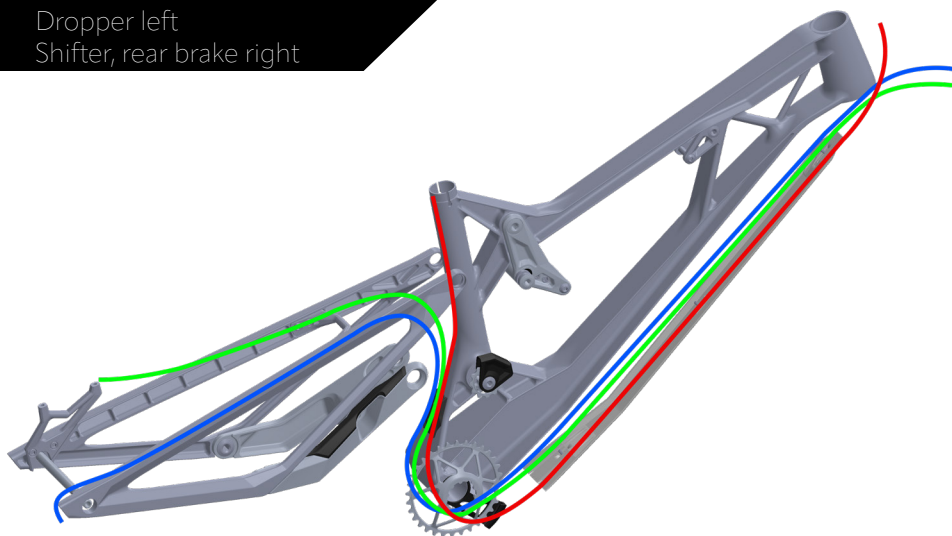



Caution

Pre-configuration of cable at front frame cable manager is important. Inappropriate installation may cause the cables to rub against the frame surface, resulting in unwanted damage.

CONFIGURATION-

Dropper, rear brake left

Shifter right

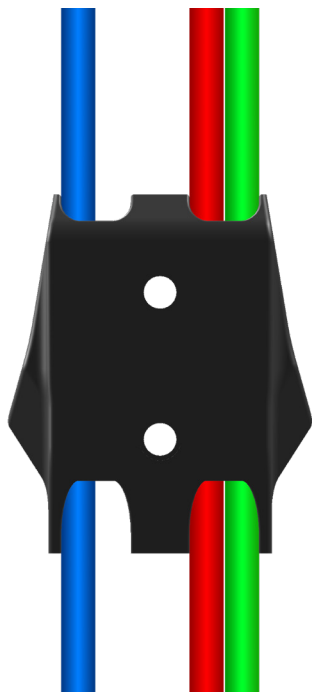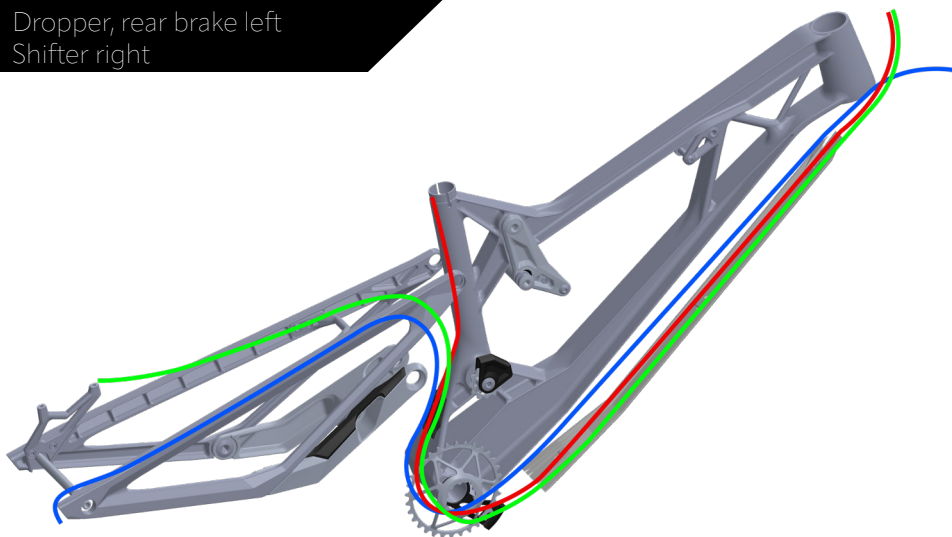

CABLE ROUTING PROTOCOL

Lane Pre-Configuration: Before installation, assign a specific "lane" (position) for the Shifter, Rear Brake, and Dropper Post cables.

Entry & Alignment: Insert the cables into the Front Triangle Cable Manager. You must maintain the designated lane throughout the system; the hole position used at the Cable Manager must match the corresponding hole position at the Front Triangle Cable Case.

Routing Path:

- Pass the cables through the Front Triangle Cable Manager.
- Wrap the cables around the Bottom Bracket shell.
- Feed the cables into the Front Triangle Cable Case and out.
- Route the cables through the Rear Triangle Bridge to their respective components.

Consistency Check: Ensure cables do not cross over each other inside the frame. The cable position (Left, Center, or Right) must remain constant from the entry point to the exit point.

EVOK DESIGN OWNER'S MANUAL:

SECTION 4 - LIMITED WARRANTY & CLAIM ADJUDICATION

PREFACE: THE EVOK ECONOMICS & ENGINEERING STANDARD

To understand our warranty, you must understand our reality. CNC machining a chassis from solid 7075-T651 Aviation Grade Aluminum is an exceptionally costly process, yet we price our frames to be accessible to riders.

To sustain this pricing structure, our business cannot absorb the cost of replacing frames damaged by crashes or misuse. If we covered non-defects, we would have to double our prices. However, the very process that drives our production costs up drives your defect risk down: machining from a solid block eliminates the heat-affected zones (HAZ) of welding and the porosity of casting, reducing the likelihood of a genuine manufacturing defect to near zero. Therefore, to protect our sustainability and keep your costs low, our warranty is strictly limited to original defects.

SECTION 1: PROBLEM SOLVING & RIDER SUPPORT

We know that when you buy an Evok Design frame, you are investing in a relationship with us. We also know that in the rough world of gravity riding, things don't always go to plan. Whether it's a strange noise or a genuine concern about a part, we are here to guide you through it.

1.1 "Small Issues" – Noise, Wear & Cosmetics

The Issue: You hear a creak, notice a surface scratch, or feel a pivot becoming loose.
The Reality: Metal-on-metal mechanical systems are subject to vibration and settling. Minor creaks usually mean the bike requires maintenance (grease and torque), not that the metal has failed. Similarly, surface finish breaches are inevitable results of normal riding. **The Solution (Maintenance Support):** Before worrying about a claim, we recommend a "Nut & Bolt" service.

--**Creaks:** Usually resolved by cleaning, greasing, and torquing pivot bolts to the specifications listed in the Component Specification tables.

--**Play/Wobble:** Bearings (e.g., 6804, 6803, 6801) are wear items and are not covered. They are designed to be replaced periodically at the owner's expense.

Surface Finish: We do not warrant anodizing or powder coating against the rocks and debris of the trail.

1.2 "Big Issues" – Structural Concerns

The Issue: You discover a visible fissure in the CNC aluminum structure or a misalignment that prevents assembly. **The Reality:** While 7075-T651 is incredibly resilient, no material is completely impervious to destruction. If there is a genuine flaw in the raw material block or a machining error, we need to know. **The Solution (The Investigation):** If your frame has a structural defect, we will initiate our Investigation Protocol. We are committed to getting you back on the trail safely, provided the issue is a genuine manufacturing fault and not the result of impact or negligence.

SECTION 2: SUSTAINABILITY, LIABILITY & INVESTIGATION

To continue producing high-end, CNC-machined frames at a sustainable level, we must be clear about what we can and cannot cover.

2.1 Registration & Non-Transferability

The Policy: Warranty coverage is valid only if the product is registered at evokcycling.com within 30 days of purchase. This warranty extends only to the Original Retail Purchaser and is strictly non-transferable. It becomes null and void the moment the frame is sold, gifted, or transferred to a second owner. We cannot verify the history of used equipment; therefore, we cannot carry the liability for it.

2.2 Defined Scope of Coverage (The "5-Part" Rule)

To ensure absolute clarity, this warranty applies exclusively to the specific structural components manufactured by Evok Design, as identified in the Frameset Explode Views.

Covered Components (The "Core 5"):

- Main Frame (Front Triangle)
- Left Rear Triangle Arm
- Right Rear Triangle Arm
- Upper Linkage(Any side)
- Lower Linkage(Any side)

NOT Covered (Component Exclusion): Any part not listed above is excluded from warranty coverage. This explicitly includes:

- Pivot Bearings and Bushings.
- Axles, Bolts, and Fasteners.
- Derailleur Hangers (UDH).
- Frame Protection (Rubber/Plastic guards, Flip Chips).
- Third-party Components.

2.3 The Defect vs. Misuse Clause

The Policy: This warranty covers Manufacturing Defects Only. It does NOT cover damage resulting from riding errors, crashes, assembly errors, or component failures.

Evok Design frames are built to withstand vertical loads, not uncontrolled crashes or negligence. Any damage identified by our forensic team as resulting from the scenarios outlined in the Topro 170 Owner's Manual is excluded from warranty.

Specifically, coverage is VOID in the following instances:

1. Unpredictable Severe Impacts: Any damage resulting from the crash scenarios detailed in Section 1 (Rider Safety & Risk Awareness) of the User Manual (e.g., Frontal Impacts, Casing, Side Impacts, Ghost Riding, Flat Landings >1.2m, or Off-Axis "Whip" Failures).
2. Incorrect Assembly: Damage caused by failure to adhere to Section 2.2 (Assembly & Professional Care), specifically regarding torque precision or assembly by non-certified technicians.
3. Component Malfunction: As stated in Section 2.2, crashes or structural damage caused by the malfunction of third-party components (e.g., a seized shock, collapsed fork, or brake failure) are not considered frame defects and are not covered.
4. Environmental Neglect: Damage resulting from operation outside the limits defined in Section 2.3 (Operational Range & Environmental Limits), including Maximum System Weight (>135kg) violation, extreme heat storage (>60°C), or corrosion from salt/coastal environments.

2.4 The "Custom Configuration" Clause

The Policy: Evok Design offers models that allow customers to commission "One-of-One" highly customized geometry or machining configurations. Due to the extreme cost and singular nature of Highly Customized Parts, these specific custom components are NOT warranted for free replacement, even in the event of a material defect.

The Remedy: If a verified manufacturing defect occurs in a "Highly Customized" part, the customer is entitled to a Loyalty Purchase of a replacement part at 30% off the original retail price. We cannot absorb the full cost of re-machining a unique, one-off design.

2.5 The Mandatory Investigation Protocol

The Policy: We do not issue replacements based on photos alone. To filter out concealed crash damage, we require a physical forensic examination.

The Steps:

1. Digital Screening: Submit photos of the damage. If approved, we will issue a Return Authorization (RA).
2. Customer Shipment: The customer must ship the "Failed Unit" to Evok Design headquarters. Shipping costs are the customer's responsibility.
3. Forensic Examination: Our engineers will analyze the fracture mode of the 7075-T651 aluminum. We look for evidence of frame defects.
4. Determination: Proceed to Section 2.7 for the outcome.

2.6 Returns & Restocking (30-Day Policy)

The Policy: If you change your mind, you may return a new, unbuilt frame within 30 days of delivery.

A. Standard Configuration Frames (30-Day Policy)

The Policy: If you change your mind, you may return a new, unbuilt Standard Configuration frame within 30 days of delivery.

The Risk (Read Carefully):

- Cost: The customer pays for return shipping.
Technician Examination: Upon receipt, a technician will inspect the frame for any signs of assembly marks, scratches, or handling damage.
- The Verdict:
 - Resellable Condition: A refund is issued (minus original shipping costs).
 - Damaged/Marked: If the frame shows any sign of handling that prevents it from being sold as "New," the return is rejected. The frame will be shipped back to the customer at their expense, and no refund will be made.

B. Highly Customized Frames ("One-of-One" Exclusion)

The Policy: Due to the bespoke nature of "One-of-One" custom frames, returns are NOT possible once the frame has shipped. The Pre-Shipment Digital Verification Protocol: To ensure total satisfaction before the product leaves our facility, we enforce the following procedure:

--Visual Inspection: Before shipping, Evok Design will provide a comprehensive pre-shipping inspection video and high-resolution photos, or any specific visual inspection demanded by the customer.

--Customer Approval: The customer must confirm that the product meets their specifications based on this visual evidence.

--Binding Agreement: Once the customer approves the reality of the product and the frame is shipped, the sale is FINAL. No return, refund, or revision to the product will be accepted beyond that point.

2.7 Warranty Resolutions (The Three Scopes)

Once the Investigation is complete, the outcome will fall into one of three scopes:

A. Scope: Warranty Solution (Defect Confirmed - Standard)

Definition:

The investigation confirms a manufacturing defect in materials or workmanship on a Standard Configuration part, with no evidence of crash damage, assembly error, or misuse.

Outcome:

Evok Design will provide a replacement part from available inventory.

Inventory Reality: We reserve the right to replace the product with the available inventory. If your specific color is out of stock, you may receive a Raw or Black replacement.

Labor Costs: Evok Design covers the cost of the replacement part only. We do not cover labor costs for switching components to the new frame.

B. Scope: Loyalty Replacement (Custom Parts / Crash Damage)

Definition:

The frame is broken due to a crash, "Unpredictable Severe Impact", negligence, or component malfunction.

OR: A defect is found in a Highly Customized (One-of-One) component.

Outcome:

The Original Owner may purchase a replacement part at a 30% Discount off the current retail price.

C. Scope: No Warranty (Claim Denied)

Definition:

The investigation reveals the issue was caused by improper assembly, modification, or wear and tear, and the customer declines the Loyalty Replacement offer.

Outcome:

The claim is closed. The customer is responsible for return shipping costs if they wish to keep the damaged unit.

2.8 Limitation of Liability (Customer Responsibility)

The user assumes all risks inherent to downhill riding. Evok Design warrants that the frame is free from defects in materials and workmanship. In the event of a frame failure caused by Misuse, Crash, or "Unpredictable Severe Impacts" (as defined in Section 1 of the User Manual), Evok Design assumes NO LIABILITY for any direct, indirect, incidental, or consequential damages. The Customer Accepts Sole Responsibility For:

Medical Costs: All hospital, ambulance, and rehabilitation expenses resulting from injury.

Lost Wages: Any loss of income due to recovery time or disability.

Property Damage: Damage to third-party components (e.g., broken forks, helmets, clothing) or environmental structures.

THIS IS THE FULL AND COMPLETE STATEMENT OF EVOK DESIGN'S WARRANTY.

EVOK DESIGN OWNER'S MANUAL:

SECTION 5 - MAINTENANCE & SERVICE

Preserving Performance & Operational Integrity

A quiet bike is a fast bike. Gravity sports are inherently hazardous and subject your equipment to extreme physical forces that exceed those of standard cycling. The Evok Design 7075-T651 aluminum chassis is engineered for immense strength, but no material is impervious to neglect.

WARNING: Failure to follow this maintenance schedule can result in component failure, loss of control, severe injury, or death. Riding a bike with loose hardware, seized bearings, or damaged components constitutes negligence and will void your warranty.

5.1 Pre-Ride Inspection

Refer to Section 2.1 "The Ready-to-Ride Ritual" for the mandatory checklist. You must perform the mandatory 5-Point Safety Check outlined in the Operational Protocols section before every ride. If you discover any anomaly, DO NOT OPERATE the bike until it is resolved.

5.2 Frame Service Interval Schedule

The following schedule applies strictly to the Evok Design frameset. Maintenance for third-party components (Suspension, Brakes, Drivetrain, Wheels) must be performed according to the specific manufacturer's user manual.

INTERVAL	SERVICE PROCEDURE	NOTES
Every Ride	Visual & Acoustic Inspection Clean Pivot Areas	Refer to Section 2.1. Remove mud and debris from linkage bridges and shock mounts to prevent abrasion.
Every 25 hours	Bolt torque check Linkage Inspection	Verify torque on all frame pivot axles and shock bolts. Check for play or lateral movement in the rear triangle.
Every 100 hours	Full Teardown & Inspection Bearing Replacement	Disassemble linkage to clean and inspect pivot axles and spacers for wear (See Section 5.3). Replace all frame pivot bearings. Use MAX Bearings only (See Section 5.4).

5.3 Full Frameset Disassembly Guide

Note: This procedure should only be performed by a Qualified Bicycle Mechanic. Refer to the Exploded Views in Section 3 for component identification.

Step 1: Preparation & Component Removal

- Mount the bike in a repair stand. Remove the wheels, crankset, and rear brake system.
- Remove the chain from the chainring and Idler Cog (R17).

Step 2: Shock Removal

- Support the rear triangle to prevent it from swinging loose.
- Remove the Front Shock Eye Bolt (F19), Front Shock Eye axle (F15) and Rear Shock Eye Bolt (F11).
- Remove the shock from the frame.

Step 3: Rear Triangle Separation

- Upper Connection: Remove the UpperLink-Rear Pivot Bolts (R4) and UpperLink-Rear Pivot Axle(R7) Rconnecting the seat stays to the upper linkage.
- Lower Connection: Remove the LowerLink-Rear Pivot Bolts (R21) connecting the chainstays to the lower linkage.
- Carefully pull the Rear Triangle away from the Front Triangle.

Step 4: Linkage Removal

- Upper Link: Remove the UpperLink-Front Pivot Bolt (F9) and UpperLink-Front Pivot Axle(F8) to release the Upper Link from the front triangle.
- Lower Link: Remove the LowerLink-Front Pivot Bolt (R10) and LowerLink-Front Pivot Axle(R11) to release the Lower Link from the front triangle.

Step 5: Idler & Hardware Removal

- Remove the Idler Cog Bolt (R19) to remove the Idler Cog (R17), Idler Cog Spacer(R13) and Bearing Retainer (R18).
- Inspect all axles (F8, R11, R7) for scoring or pitting.

Step 6: Reassembly & Thread Locker Application

- Clean all old thread locker from bolts using a pick or wire brush.
- Mandatory: Apply fresh thread locker (blue/medium strength) to all bolts marked "on thread" in the Component Specification tables (Section 3).
- Caution: Do not apply thread locker to bolts marked "no thread locker" (e.g., F8, R6, R10), as these often rely on grease for proper pivot rotation.

5.4 Pivot Bearings: MAX Series Requirement

The Evok frame utilizes specific "MAX" (Full Complement) sealed bearings (6804, 6803, 6801 series). Unlike standard bearings which use a retainer cage, MAX bearings are packed with the maximum number of balls possible. This design provides significantly higher load capacity and lateral rigidity.

Replacement Standard: When replacing bearings, you must install MAX-type bearings. Using standard caged bearings will result in premature failure and decreased frame stiffness.

Wear Items: Bearings are consumable. Riding with seized bearings transfers impact loads directly into the 7075-T651 structure, potentially causing ovalization of the bores. Damage caused by seized bearings is not covered under warranty.

5.5 Torque Specifications

Refer to Section 3 "Technical Specifications" for the complete torque chart. Precision is critical. Tightening variations of even 10% can compromise the safety of the frame. Always use a calibrated torque wrench and adhere strictly to the values listed in the Component Specification tables in Section 3.



CONTACT INFO

EMAIL:

contact@evokcycling.com

WEBSITE:

evokcycling.com
or scan QR-code

