


Scale 1:10. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

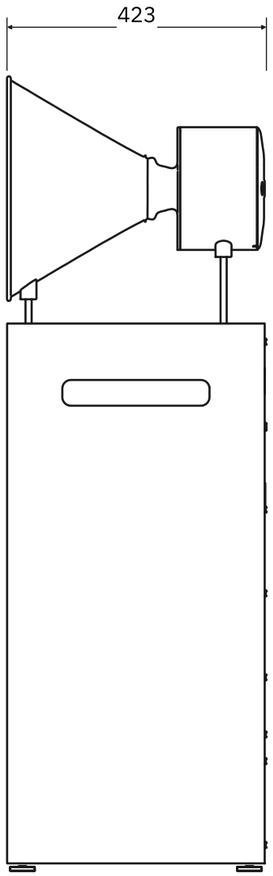

FROM THE RIGHT

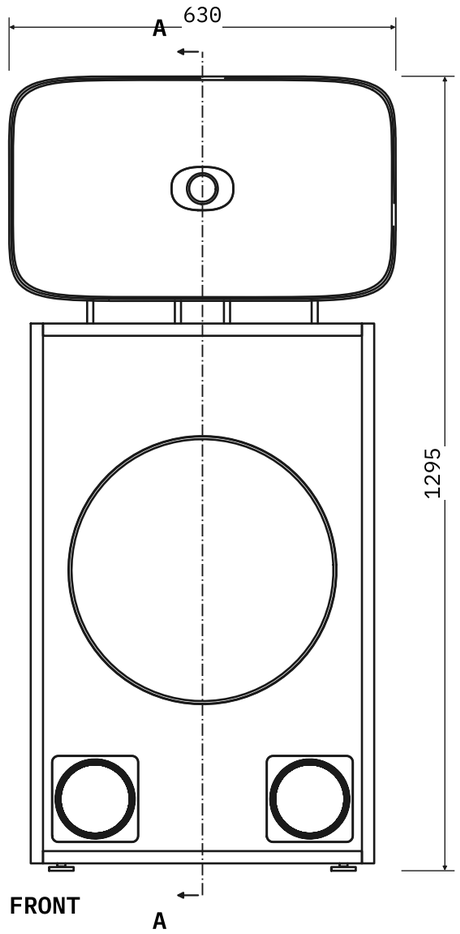

FRONT

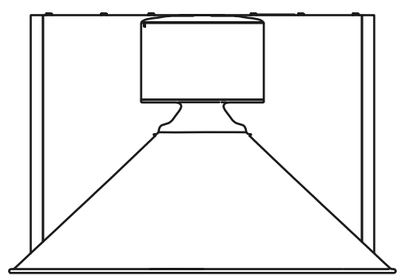

FROM ABOVE

General arrangement


barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

BHC-001 rev A

Scale 1:10. Section A-A (sheet 1): the product cut at x 280.0 and seen from the right; cut faces hatched, a different angle for each part.

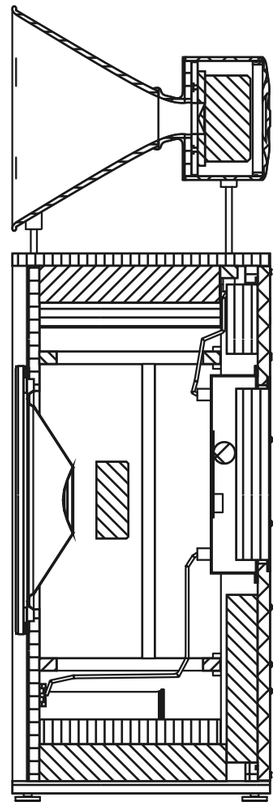

Section A-A


barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

BHC-002 rev A

Scale 1:10, parts drawn apart. Balloons are the parts list's numbers (last sheet).

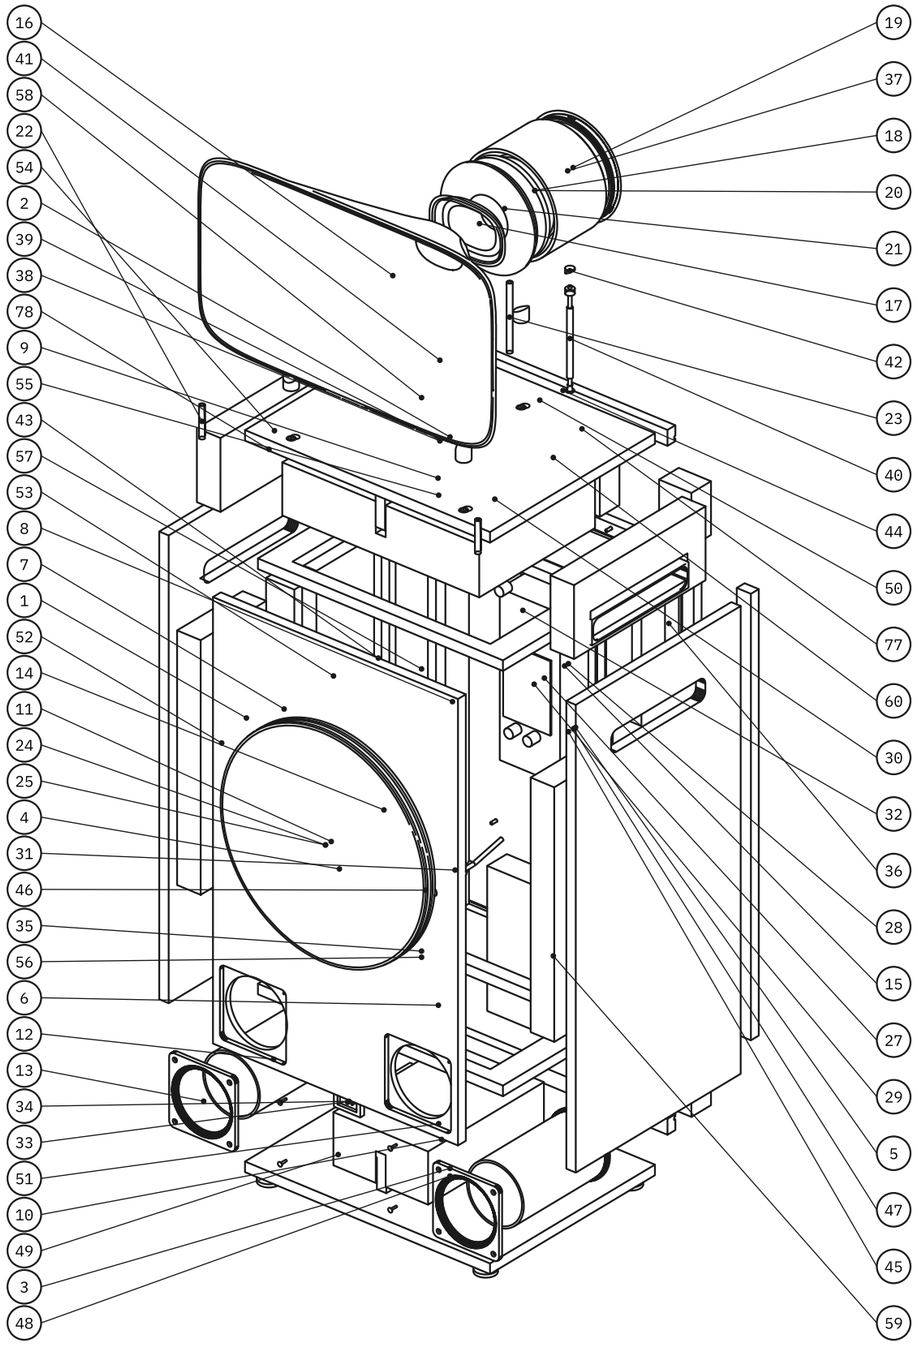


Exploded view

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:20. Panels cut to their outline only (DXF files in dxf/); sizes as seen from the outer face.




rib-left-1, rib-right-1

20 mm cast-acrylic, 4 for the set




rib-back-1, rib-back-2

20 mm cast-acrylic, 4 for the set




rib-top

20 mm cast-acrylic, 2 for the set




rib-bottom

20 mm cast-acrylic, 2 for the set



lining-left-2a, lining-right-2a

50 mm polyester-batting, 4 for the set



lining-left-2b, lining-right-2b

50 mm polyester-batting, 4 for the set


Sheet parts: plain panels

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/left.dxf. Marks listed at the right.

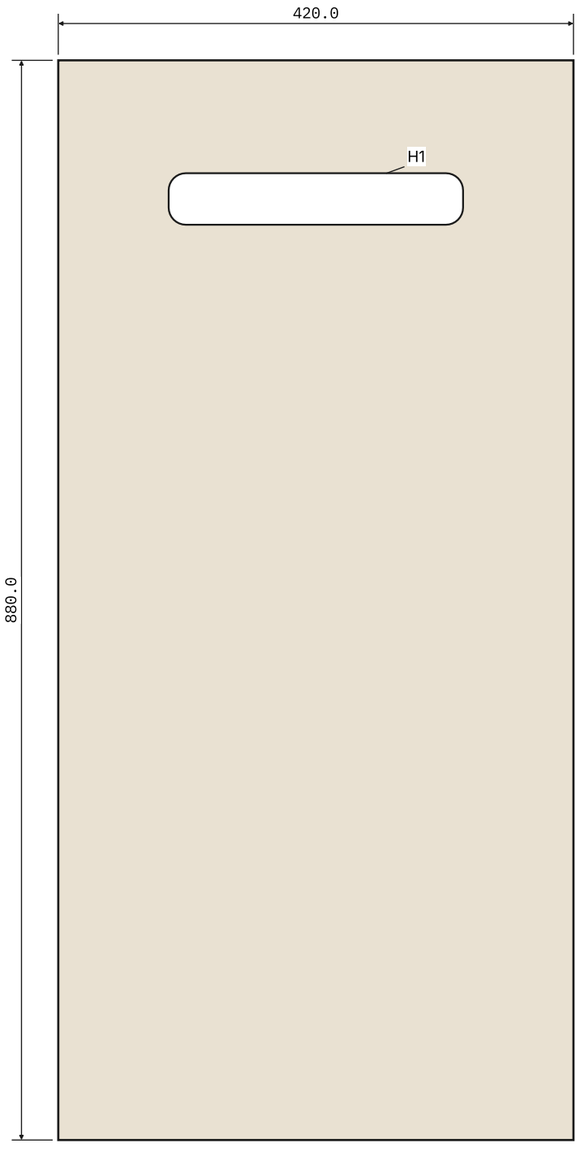

left: 20 mm cast-acrylic, 2 for the set, seen from its outer face

mark	size	x	y	depth
H1	profile (DXF)	210.0	767.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: left

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/right.dxf. Marks listed at the right.

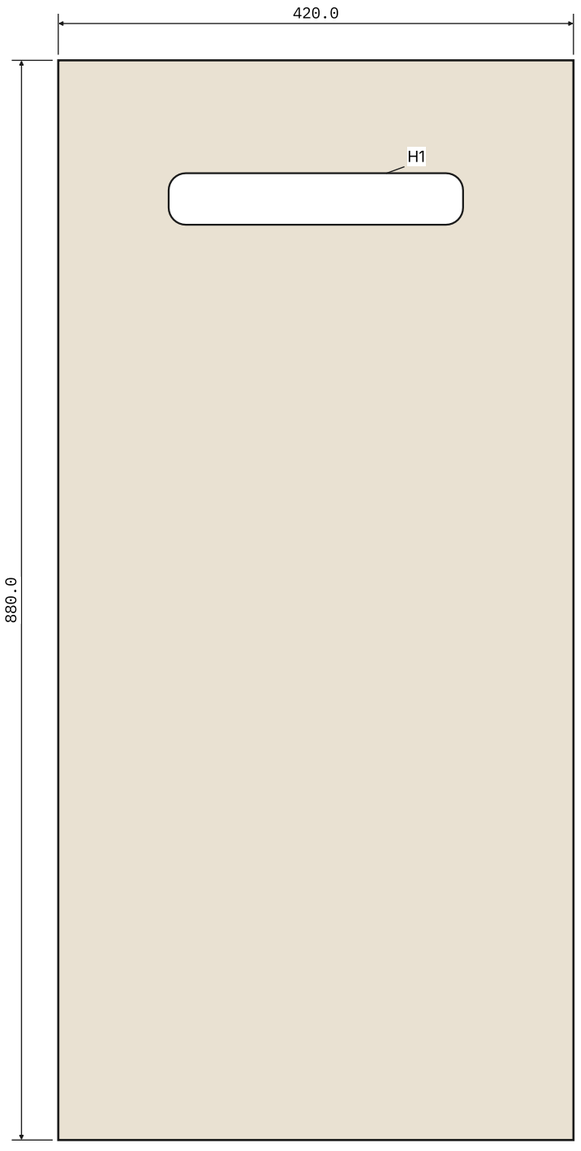

right: 20 mm cast-acrylic, 2 for the set, seen from its outer face

mark	size	x	y	depth
H1	profile (DXF)	210.0	767.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: right

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/top.dxf. Marks listed at the right.

mark	size	x	y	depth
P1	Ø15.2	300.0	353.0	15 from face
P2	Ø15.2	220.0	353.0	15 from face
P3	Ø15.2	443.0	35.0	15 from face
P4	Ø15.2	77.0	35.0	15 from face
H1	Ø10.5	220.0	353.0	through
H2	Ø6.5	300.0	353.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

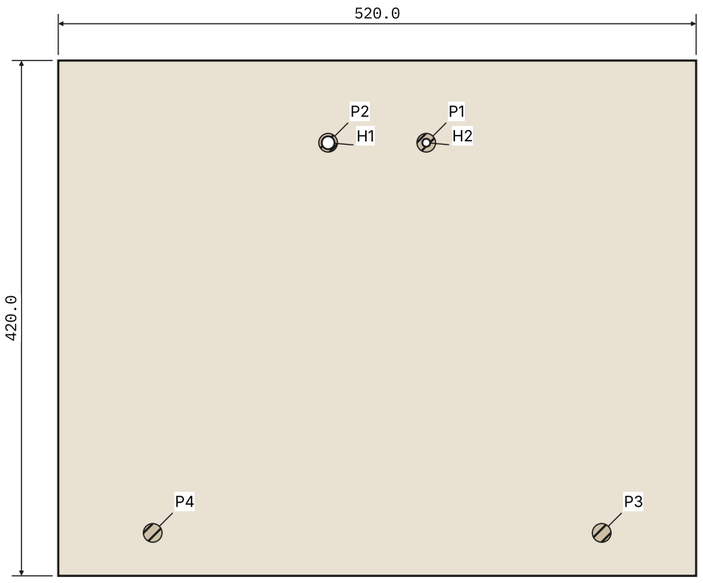

top: 20 mm cast-acrylic, 2 for the set, seen from its outer face

Sheet part: top

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/bottom.dxf. Marks listed at the right.

mark	size	x	y	depth
P1	Ø12.5	30.0	25.0	15 from face
P2	Ø12.5	30.0	395.0	15 from face
P3	Ø12.5	490.0	25.0	15 from face
P4	Ø12.5	490.0	395.0	15 from face

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

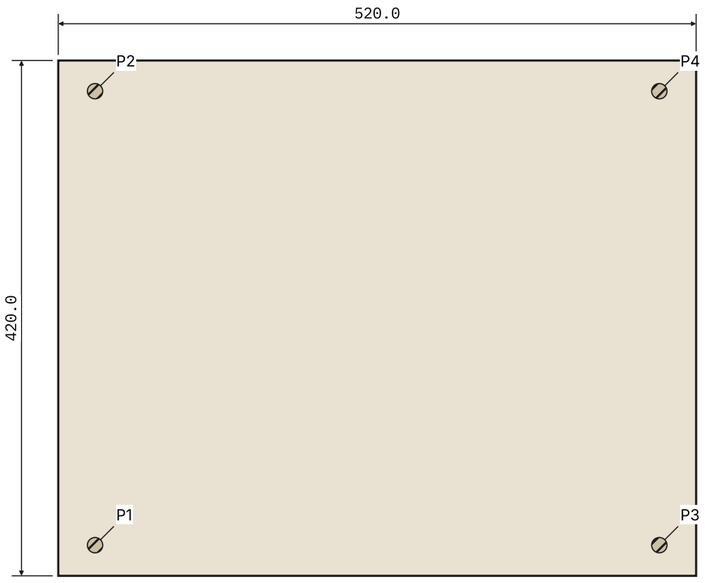

bottom: 20 mm cast-acrylic, 2 for the set, seen from its outer face


Sheet part: bottom

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/front-panel.dxf. Marks listed at the right.

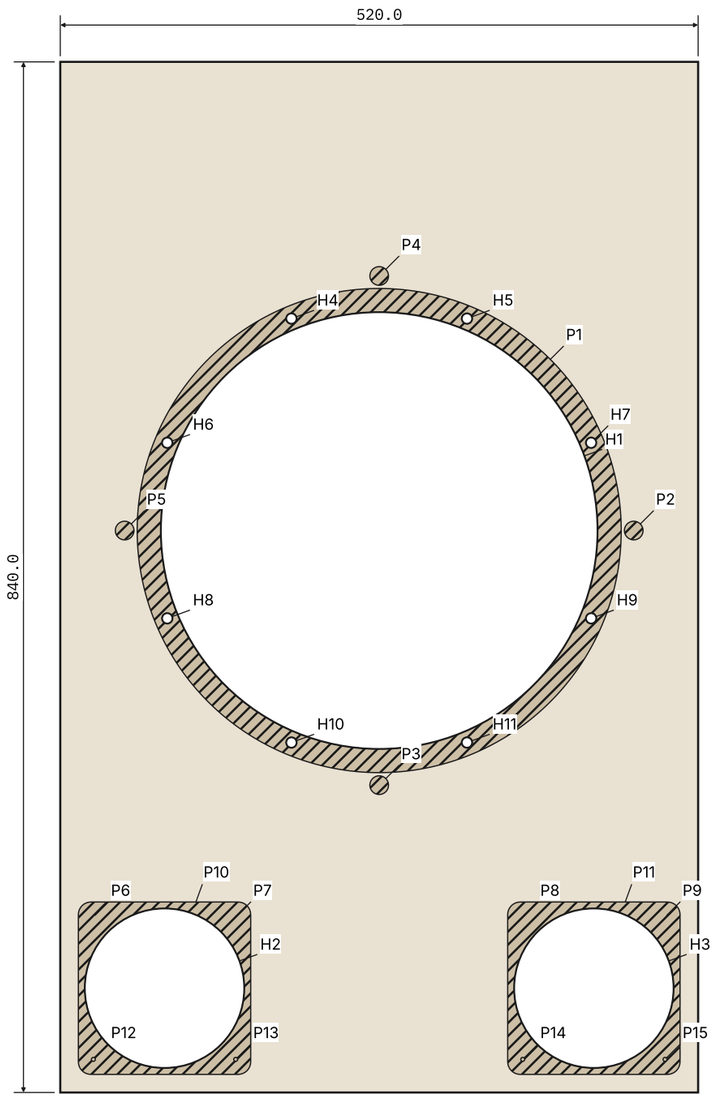

front-panel: 20 mm cast-acrylic, 2 for the set, seen from its outer face

mark	size	x	y	depth
P1	Ø394.6	260.0	458.0	11 from face
P2	Ø15.2	467.5	458.0	3.2 from face
P3	Ø15.2	260.0	250.5	3.2 from face
P4	Ø15.2	260.0	665.5	3.2 from face
P5	Ø15.2	52.5	458.0	3.2 from face
P6	profile (DXF)	27.0	143.0	17 from face
P7	profile (DXF)	143.0	143.0	17 from face
P8	profile (DXF)	377.0	143.0	17 from face
P9	profile (DXF)	493.0	143.0	17 from face
P10	profile (DXF)	85.0	85.0	9 from face
P11	profile (DXF)	435.0	85.0	9 from face
P12	profile (DXF)	27.0	27.0	17 from face
P13	profile (DXF)	143.0	27.0	17 from face
P14	profile (DXF)	377.0	27.0	17 from face
P15	profile (DXF)	493.0	27.0	17 from face
H1	Ø356.0	260.0	458.0	through
H2	Ø130.0	85.0	85.0	through
H3	Ø130.0	435.0	85.0	through
H4	Ø8.5	188.4	630.8	through
H5	Ø8.5	331.6	630.8	through
H6	Ø8.5	87.2	529.6	through
H7	Ø8.5	432.8	529.6	through
H8	Ø8.5	87.2	386.4	through
H9	Ø8.5	432.8	386.4	through
H10	Ø8.5	188.4	285.2	through
H11	Ø8.5	331.6	285.2	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: front-panel

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/back.dxf. Marks listed at the right.

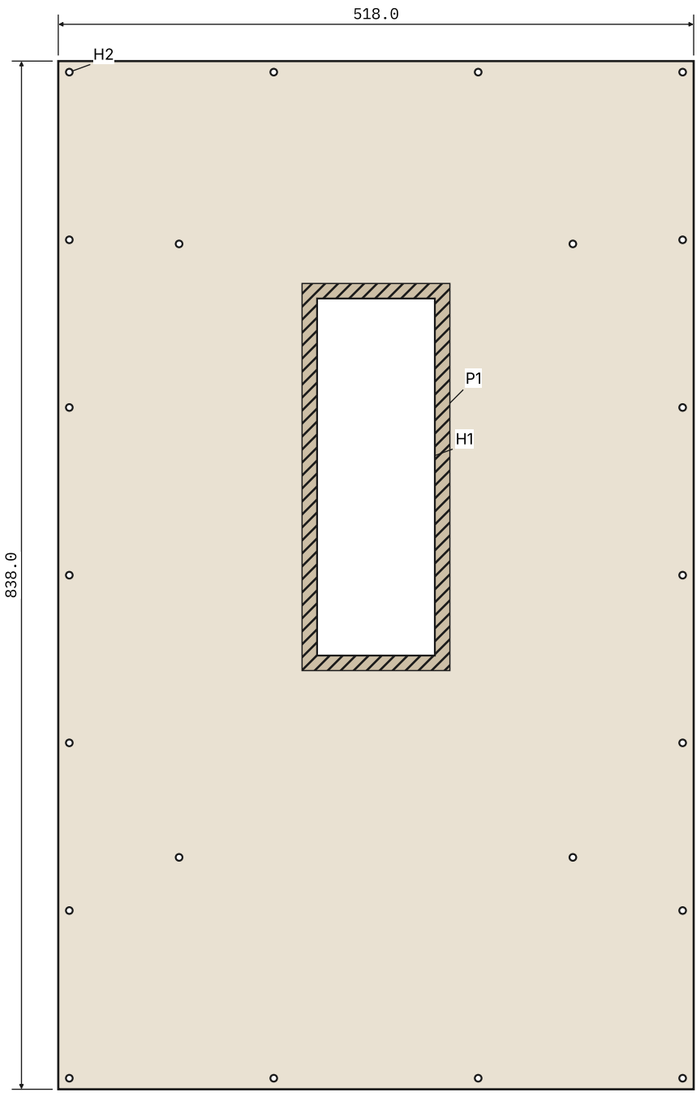

back: 20 mm cast-acrylic, 2 for the set, seen from its outer face

mark	size	x	y	depth
P1	120.5 × 315.5	259.0	499.0	4.5 from face
H1	96.0 x 291.0	259.0	499.0	through
H2	Ø5.5	22 off	DXF	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: back

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/brace.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	420.0 x 239.0	260.0	147.5	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

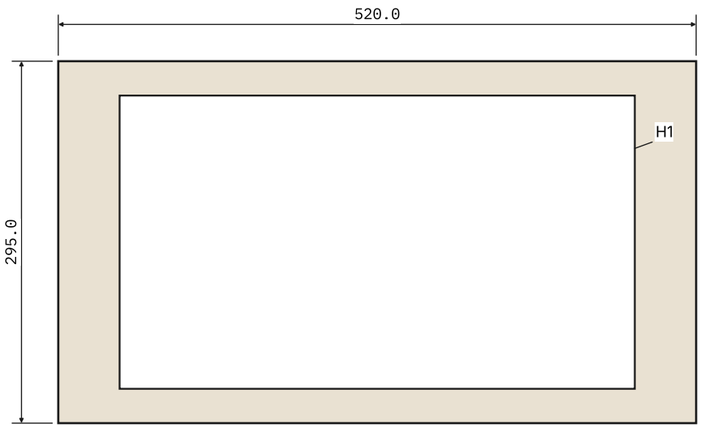

brace: 20 mm cast-acrylic, 2 for the set, seen from its outer face

Sheet part: brace

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/brace-2.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	420.0 x 239.0	260.0	147.5	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

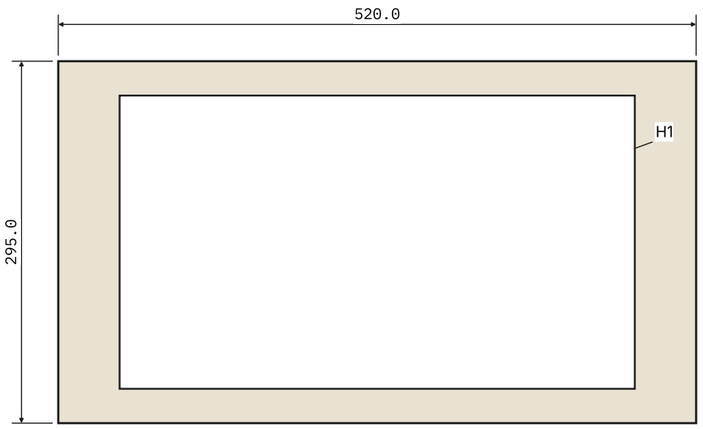

brace-2: 20 mm cast-acrylic, 2 for the set, seen from its outer face


Sheet part: brace-2

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/woofer-ring.dxf. Marks listed at the right.

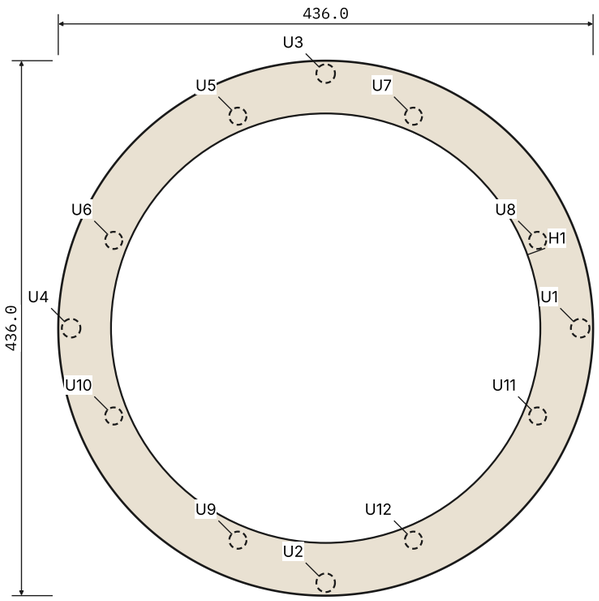

woofer-ring: 6 mm cast-acrylic, 2 for the set, seen from its outer face

inner-face pockets: dxf/woofer-ring-underside.dxf (seen from that face)

mark	size	x	y	depth
H1	Ø350.0	218.0	218.0	through
U1	Ø15.2	425.5	218.0	3.2 from inside
U2	Ø15.2	218.0	10.5	3.2 from inside
U3	Ø15.2	218.0	425.5	3.2 from inside
U4	Ø15.2	10.5	218.0	3.2 from inside
U5	Ø14.0	146.4	390.8	4 from inside
U6	Ø14.0	45.2	289.6	4 from inside
U7	Ø14.0	289.6	390.8	4 from inside
U8	Ø14.0	390.8	289.6	4 from inside
U9	Ø14.0	146.4	45.2	4 from inside
U10	Ø14.0	45.2	146.4	4 from inside
U11	Ø14.0	390.8	146.4	4 from inside
U12	Ø14.0	289.6	45.2	4 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: woofer-ring

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/port-frame-left.dxf. Marks listed at the right.

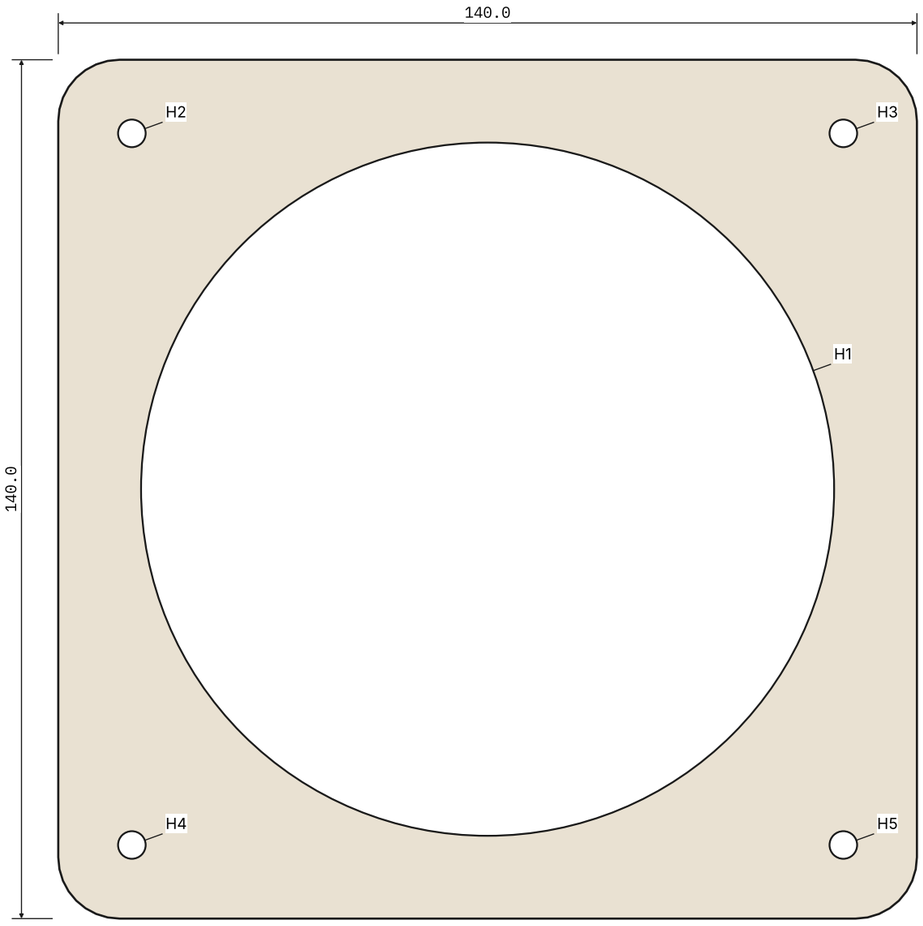

mark	size	x	y	depth
H1	Ø113.0	70.0	70.0	through
H2	Ø4.5	12.0	128.0	through
H3	Ø4.5	128.0	128.0	through
H4	Ø4.5	12.0	12.0	through
H5	Ø4.5	128.0	12.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

port-frame-left: 8 mm cast-acrylic, 2 for the set, seen from its outer face

not in the cut file: 4 holes countersunk 90 deg from the outer face
and: the 113 hole at 70, 70 rounded over from the outer face (24 faces, 2 to 88 deg off the sheet)


Sheet part: port-frame-left

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/port-frame-right.dxf. Marks listed at the right.

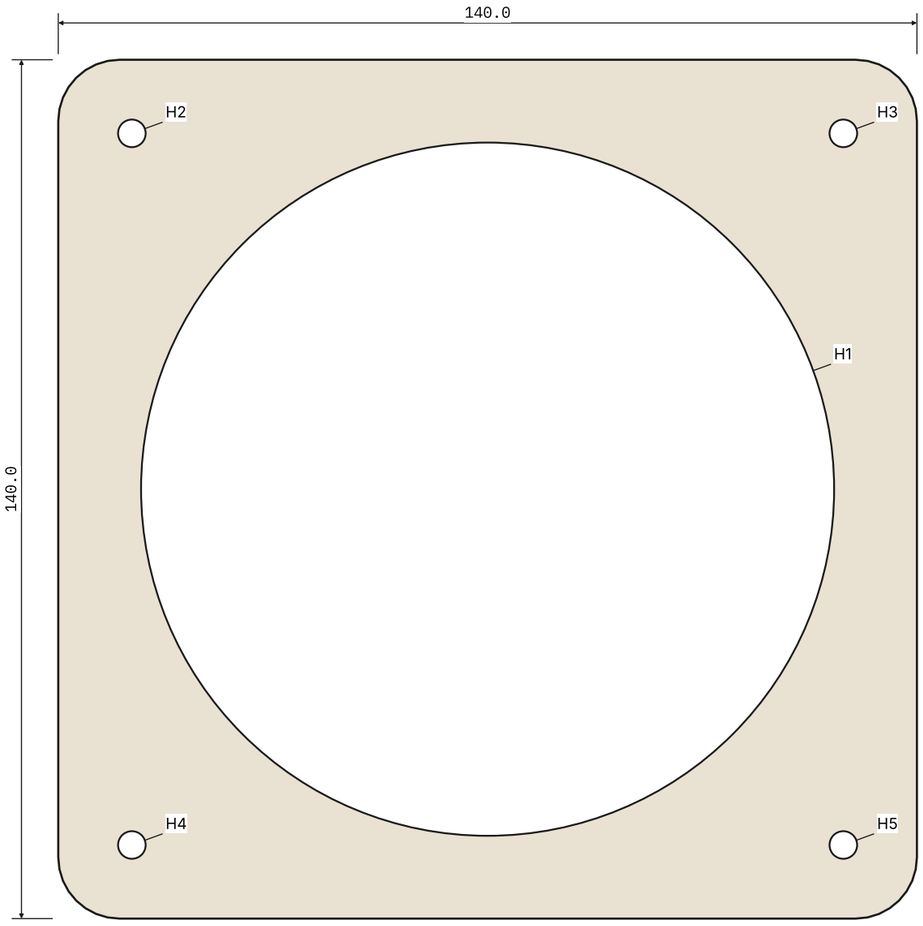

mark	size	x	y	depth
H1	Ø113.0	70.0	70.0	through
H2	Ø4.5	12.0	128.0	through
H3	Ø4.5	128.0	128.0	through
H4	Ø4.5	12.0	12.0	through
H5	Ø4.5	128.0	12.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

port-frame-right: 8 mm cast-acrylic, 2 for the set, seen from its outer face

not in the cut file: 4 holes countersunk 90 deg from the outer face
and: the 113 hole at 70, 70 rounded over from the outer face (24 faces, 2 to 88 deg off the sheet)


Sheet part: port-frame-right

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/disc-frame.dxf. Marks listed at the right.

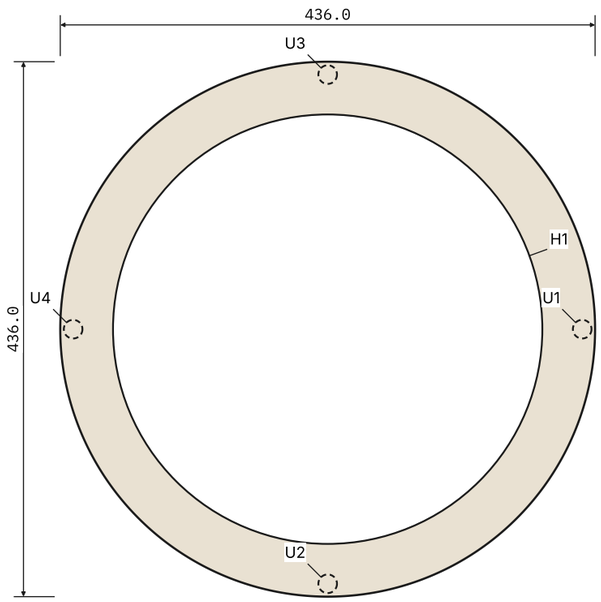

mark	size	x	y	depth
H1	Ø350.0	218.0	218.0	through
U1	Ø15.2	425.5	218.0	3.2 from inside
U2	Ø15.2	218.0	10.5	3.2 from inside
U3	Ø15.2	218.0	425.5	3.2 from inside
U4	Ø15.2	10.5	218.0	3.2 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

disc-frame: 12 mm cast-acrylic, 2 for the set, seen from its outer face

inner-face pockets: dxf/disc-frame-underside.dxf (seen from that face)


Sheet part: disc-frame

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/land-left.dxf. Marks listed at the right.

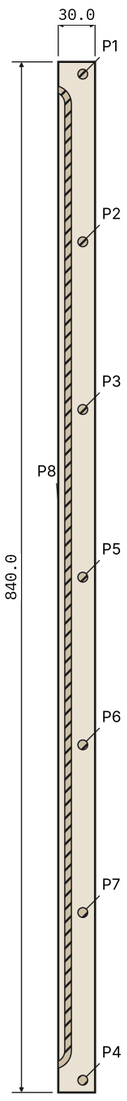

mark	size	x	y	depth
P1	Ø8.0	20.0	830.0	12 from face
P2	Ø8.0	20.0	693.3	12 from face
P3	Ø8.0	20.0	556.7	12 from face
P4	Ø8.0	20.0	10.0	12 from face
P5	Ø8.0	20.0	420.0	12 from face
P6	Ø8.0	20.0	283.3	12 from face
P7	Ø8.0	20.0	146.7	12 from face
P8	profile (DXF)	5.3	420.0	3 from face

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

land-left: 20 mm cast-acrylic, 2 for the set, seen from its outer face


Sheet part: land-left

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/land-right.dxf. Marks listed at the right.



mark	size	x	y	depth
P1	Ø8.0	10.0	830.0	12 from face
P2	Ø8.0	10.0	693.3	12 from face
P3	Ø8.0	10.0	556.7	12 from face
P4	Ø8.0	10.0	10.0	12 from face
P5	Ø8.0	10.0	420.0	12 from face
P6	Ø8.0	10.0	283.3	12 from face
P7	Ø8.0	10.0	146.7	12 from face
P8	profile (DXF)	24.6	420.0	3 from face

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

land-right: 20 mm cast-acrylic, 2 for the set, seen from its outer face

Sheet part: land-right

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/land-top.dxf. Marks listed at the right.

mark	size	x	y	depth
P1	Ø8.0	146.7	20.0	12 from face
P2	Ø8.0	313.3	20.0	12 from face
P3	profile (DXF)	230.0	7.5	3 from face

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

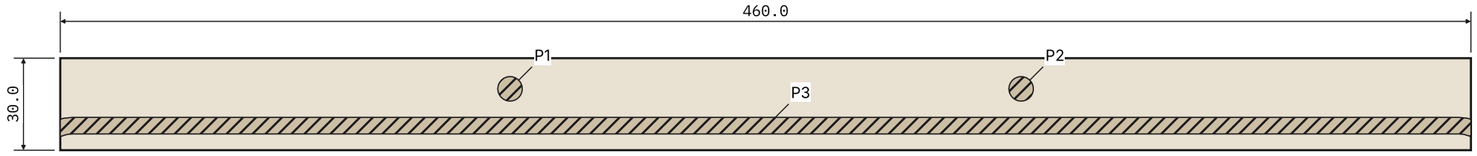

land-top: 20 mm cast-acrylic, 2 for the set, seen from its outer face

Sheet part: land-top

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/land-bottom.dxf. Marks listed at the right.

mark	size	x	y	depth
P1	Ø8.0	146.7	10.0	12 from face
P2	Ø8.0	313.3	10.0	12 from face
P3	profile (DXF)	230.0	22.5	3 from face

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

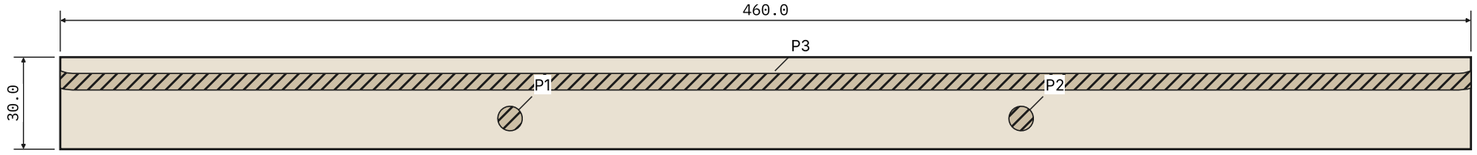

land-bottom: 20 mm cast-acrylic, 2 for the set, seen from its outer face

Sheet part: land-bottom

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

BHC-020 rev A

Scale 1:1. As the router sees it from the outer face; DXF: dxf/top-pad.dxf. Marks listed at the right.

mark	size	x	y	depth
P1	Ø9.0	94.0	14.0	10 from face
H1	Ø10.5	14.0	14.0	through
H2	Ø6.5	94.0	14.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

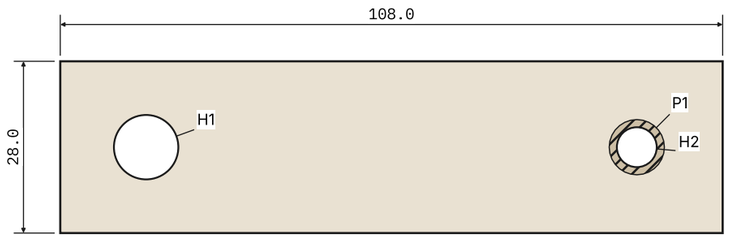

top-pad: 20 mm cast-acrylic, 2 for the set, seen from its outer face

Sheet part: top-pad

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

12. port-left, port-right: formed, cast-acrylic; 318 cm3 each; 4 for the set; 1:5


cast acrylic tube 121 × 4 (113 bore, polished), 215 long behind its frame, its inner end flared to R8 over a heated mandrel and annealed; cemented square into its frame's back face; the 2 together tune the box to 38 Hz; its length found on the first sample (three made 10 apart, the one whose impedance minimum falls at fb kept) and the rest made to it: its rounded ends cannot be trimmed

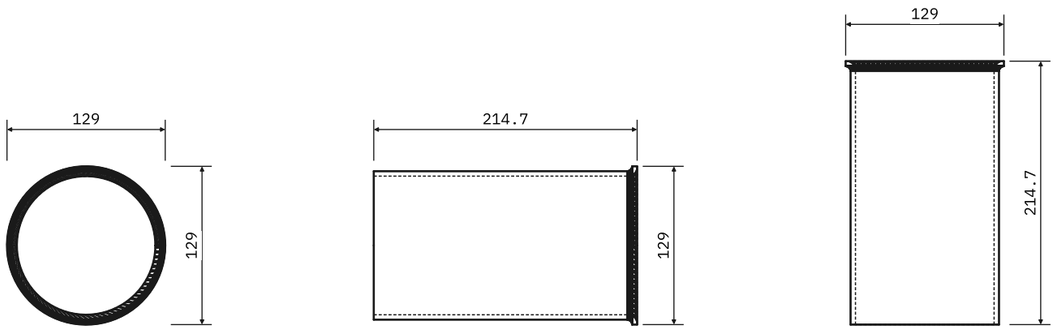

FRONT FROM THE RIGHT FROM ABOVE

16. waveguide: formed, cast-acrylic-thermoformed; 2260 cm3 each; 2 for the set; 1:10

mouth 610 × 346, 278 deep, 2 in throat, the air path as the simulation approved it; pressure-formed from 10 mm cast sheet tinted in the horn's own heavier dye lot (about 6 to 10 times the cabinet's dye, matched to a chip we approve, so its 5 to 8.5 mm wall reads deep and nearly opaque, as the site's pictures show the horn: the owner, 2026-10-31, "Deep, like the site") over a male aluminium tool (horn-tool): the blank dried, heated through at about 170 C, blown into a bubble, the tool raised into it and 4 bar over it; its face against the tool is the air path, exact; the outside free and ...

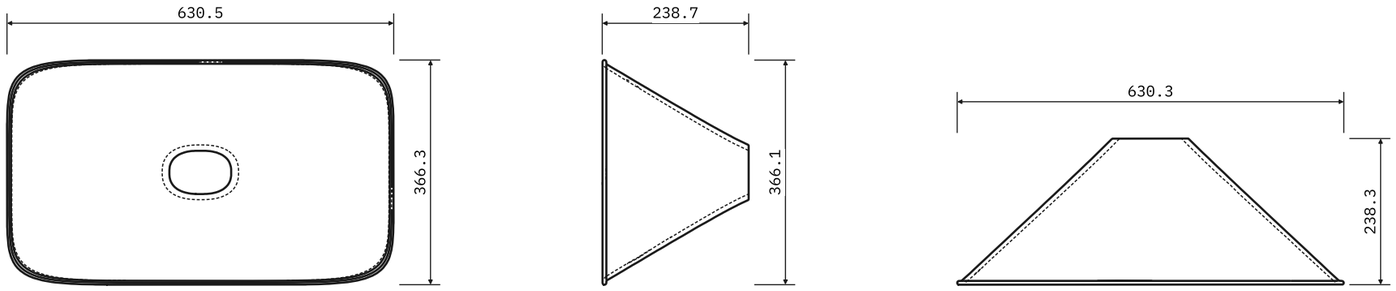

FRONT FROM THE RIGHT FROM ABOVE

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

17. horn-throat: cnc-mill, cast-acrylic-horn-lot; 458 cm3 each; 2 for the set; 1:5


turned and milled from a 75 mm block of the horn's lot: its bore the air path from the driver's 51 exit to the trim, 7 of neck outside it rising out of the flange on an R10 cove, a 12 deep socket for the flare's end (its bore the flare's outside, 0.2 clear for the cement; the two air faces meet with no step, the throat's bore machined to the same surface as the tool), and a collar round it; its flange the driver's boss, 14 thick, its spigot in the pod; 4 M5 inserts bonded in blind holes on 170 take the adaptor ring



FRONT




FROM THE RIGHT




FROM ABOVE

18. horn-pod: formed, cast-acrylic-horn-lot; 456 cm3 each; 2 for the set; 1:5


rolled from the horn lot's 6 mm sheet over a heated mandrel to 200 across, its seam scarfed and cemented underneath, between the rear posts; annealed, its bore turned true; cemented over the throat piece's spigot; the twist-lock's 3 L-slots milled in its bore; holed for the HF lead and the tie rod



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

19. waveguide-cap: cnc-mill, cast-acrylic-horn-lot; 204 cm3 each; 2 for the set; 1:5

turned from the horn lot's 30 mm sheet, its three lugs left on the spigot and milled; closes the pod behind the driver on the twist-lock as before: an eighth of a turn (45 degrees, clockwise from behind), an O-ring on the spigot beyond the lugs; two shallow finger dimples to turn it by; no screw shows



FRONT




FROM THE RIGHT




FROM ABOVE

21. hf-adaptor: lathe, aluminium; 242 cm3 each; 2 for the set; 1:5

184 across, 10 thick, bored 50.8 (the throat); 4 countersunk M6 on 101.6 take the driver from the front; 4 × 5.5 on 170 (at 45 degrees to them) take M5 socket caps into the brass inserts in the horn's boss; black anodised



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.


27. amp-box: sheet metal, aluminium; 180 cm3 each; 2 for the set; 1:10

125 × 320 inside, 75 deep from the back: 1.5 aluminium folded, its corners welded, black anodised; a 15 flange round its open side, on a 3 EPDM gasket on the back's inner face, ten screws through it, so the box stays airtight and the mains electronics are enclosed in metal; two M12 cable glands in its front; the ports' length found with it fitted (it takes volume)

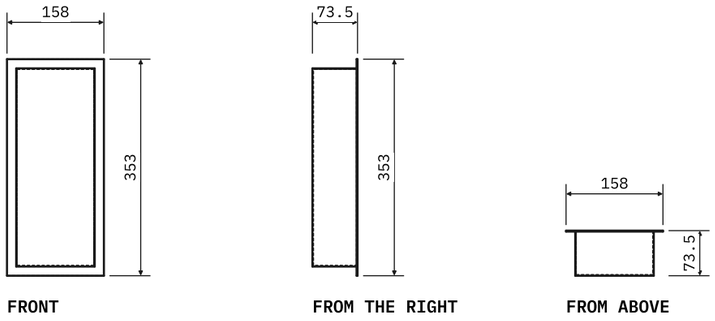

34. ir-bracket: cnc-mill, clear-cast-acrylic; 12 cm3 each; 1.0 for the set; 1:1

56 × 36 × 10, milled from 10 mm clear cast acrylic, pocketed for the board, cemented to the front panel's back face; the board held in its pocket by two bonded M2.5 inserts and nylon screws (no screw into the panel)

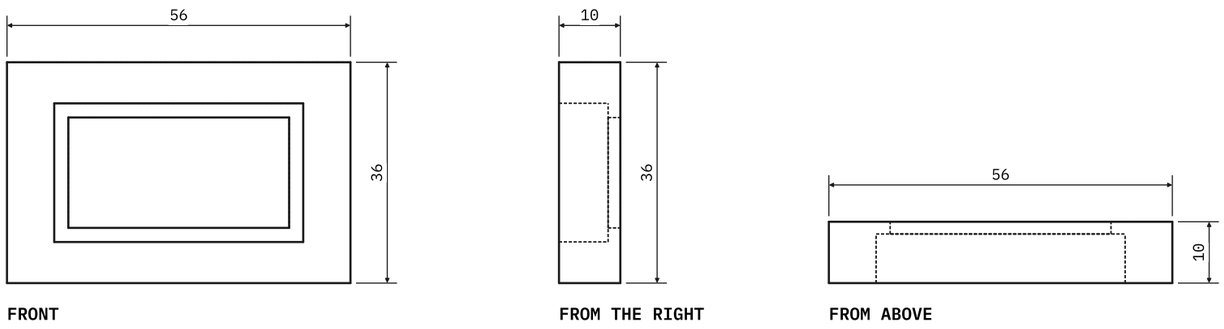

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

41. horn-pads: lathe, cast-acrylic-horn-lot; 39 cm3 each; 2 for the set; 1:10


four pucks 26 across, turned from the horn lot's 30 mm sheet, their tops milled to the flare's (the rear pair's to the pod's) underside and cemented on through a jig taken off the cabinet's sockets; each foot 15 below the shell's lowest point over it, so the M10 × 1 insert (13 × 12, bonded) stays wholly in the pad; the rear pair bored 7 on through the pod for the HF lead and the tie rod



FRONT




FROM THE RIGHT




FROM ABOVE

42. horn-saddle: lathe, cast-acrylic-horn-lot; 1 cm3 each; 2 for the set; 1:1


a puck 16 across cemented on the pod's floor inside at the tie post, its top flat for the tie rod's washer and thumb nut; bored 6.5



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

46. back-boss-1, back-boss-2, back-boss-3, back-boss-4: cnc-mill, cast-acrylic-block; 85 cm3 each; 8 for the set; 1:2


36 × 36, 73 deep: slotted 20 wide and 12 deep over the brace's rear member and cemented to it, its back face milled flush with the lands' so the back seats on both; an M5 insert bonded with epoxy in a 8 hole 12 deep takes the back's screw: the back tied to the brace



FRONT




FROM THE RIGHT




FROM ABOVE

78. grip-left, grip-right: formed, cast-acrylic-formed; 106 cm3 each; 4 for the set; 1:5


a hand grip 240 × 42, its corners rounded on 14, cut through the side; a cup drape-formed from 3 mm acrylic in the side's tint over a buck, 40 deep, its flange trimmed and cemented behind the opening, so the box stays sealed



FRONT

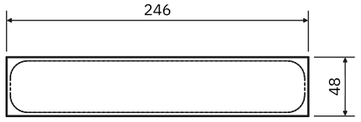

FROM THE RIGHT



FROM ABOVE

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Notes

1. The waveguide stands on four posts, stainless lamp tube 10 × 7, each threaded M10 × 1 at its top into a brass insert bonded in a pad cast under the horn (drilled after casting, through a jig taken off the top's sockets), its plain foot standing in a polyurethane sleeve in a brass socket bonded with epoxy into the top, so the horn and its posts lift off as one. An M6 rod down the free rear post, from a thumb nut inside the pod to an insert under the top, holds them down. The cap closing the pod is held by a twist-lock (round 16): three lugs on its spigot in L-slots in the pod's bore, locked by an eighth of a turn, an O-ring beyond them; no screw shows. The HF lead, a round silicone cable 5 across, runs from its connector at the amplifier's compartment straight up, through a gland under the top and up inside a rear post into the pod, where it plugs into the driver's leads. To lift the horn off: the cap off, the nut undone and the lead unplugged.
2. The FA122 crosses at 1 kHz, LR4 (round 35: in its simulation the horn loads the driver fully only from about 900 Hz, and two-way speakers of this size cross where their horns allow: JBL's 4367 at 700 Hz and its M2 at 800 on deeper waveguides, its 4430 at 1 kHz; 800 to 900 Hz only if the first sample's distortion at 100 dB/1 m stays low; B&C asks 12 dB/oct or steeper, at 800 Hz or above) with the HF channel about 6 dB down (105 dB at 2.83 V against the woofer's 99), part of it in the passive L-pad after the amplifier, so its hiss stays inaudible: two 25 W aluminium-housed resistors on a plate in the compartment, behind a 33 uF film capacitor that keeps low frequencies off the driver if the preset is ever lost.
3. The amplifier's preset, stored before the speaker ships: the crossover; a 4th-order Butterworth high-pass at 28 Hz on the woofer (below the ports' tuning the box no longer holds the cone, which would pass Xmax below about 30 Hz at full output, and a record's warp drives it there); limiters set to the woofer's Xmax and the driver's rating; a notch at the ports' pipe resonance (about 540 Hz in the pressed cabinet, 560 in the Cloud's, 600 in the plywood one), measured in each port's near field; and Hypex's auto-standby on (round 35: about 0.5 W asleep, and the compartment cooler in a warm room).
4. The amplifier in a sealed compartment of its own, as Hypex asks: 1.5 mm aluminium, black anodised, on an EPDM gasket on the back's inner face, so the box stays airtight and the mains electronics are enclosed in metal. The leads leave it through cable glands. A rating plate beside the amplifier carries the model, the serial number, the ratings, the marks and the maker's address; the finished speaker needs an EMC pre-scan and an IEC 62368-1 assessment.
5. The lining: polyester batts (thermally bonded, recycled PET), 50 mm on the sides and 100 mm on the top and the bottom (round 21), one to each bay between the braces (and the ribs), and 50 mm on the back, its full height between its ribs, so they come off with it; each cut 10 full each way and sewn into a sleeve of white voile; none on the front panel, none beside the ports (10 clear of each tube, nothing between its inner end and the back's batts) and none within 20 of the amplifier's compartment.
6. The back comes off (round 14): it closes on a 3 mm EPDM gasket against four land strips inside the shell, sixteen M5 button heads through it into inserts in them. The amplifier's compartment, the back's ribs and its batts come off with it and the leads unplug at the compartment, so the amplifier, the L-pad and the leads can be reached.
7. Four levelling feet (M8, 40 swivel bases on rubber pads) in inserts in the bottom, 50 in from its edges, lift the cabinet 12 mm: set them so it stands level and cannot rock under the horn, and lock their nuts.
8. No wood: every panel is cast acrylic, 20 mm, tinted through in its colour (red, orange, amber, green, blue, violet, frosted, black), recycled (made from recycled MMA) where a maker can make the colour, cut on a CNC router from 4 × 8 ft sheets of one batch (approve a tint swatch and a cemented corner sample first). The ring (6 mm) is cast acrylic tinted opaque in the ring colour; the cloth disc's frame (12 mm) black cast acrylic.
9. Assembly: each panel's edges milled square and polished where they show, the panels annealed (about 80 C, an hour for each 3 mm of thickness, cooled slowly); the ribs cemented to their panels flat (the back's to the back); the shell's corners, the front panel (set back 24 mm), the two braces and the back's four land strips cemented with a two-part polymerising acrylic cement for thick sheet (ACRIFIX 2R 0190 or Weld-On 40), clamped square on a jig, no visible bubble in any joint; the box annealed again; the lands' faces, the bosses' and the seal's groove milled in one setup; the back closes the box last, seated hard on the lands and the braces' bosses over a cord seal, twenty-two screws, and comes off. No solvent cement: it crazes thick cast sheet.

Notes

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Notes

10. The woofer flush in its rebate on a gasket, on eight M6 brass inserts bonded with epoxy in 8.5 holes; the ring over its frame on its magnets, bonded in their pockets; each port in the cabinet's own acrylic, its tube cemented into its 8 mm frame, fitted from the front into a recess on a foam gasket, four black M4 screws in its corners into tapped threads; the tubes cut to the length found on the first sample before their ends are flared.
11. The front: the panel's own tinted acrylic, the lining showing through it round the woofer, and a cloth disc over the woofer in the acrylic's colour, its frame standing on the ring on four magnet pairs.
12. Seen through: everything inside is drawn to be seen. The leads run straight and tied, the glands and the brass sockets show, the amplifier's compartment is black anodised, and each batt's voile sleeve has its seams to the wall.
13. Lifting (round 24): a grip 240 × 42 for both hands through each side, 92 below the top, a cup of 3 mm acrylic cemented behind it and the side's batt cut round it; two people lift a speaker by its grips, the horn off. The feet's M8 inserts take castors, spikes or isolation feet in place of the levelling feet, sold separately.
14. The mark (round 24): EARF 140 wide, laser-etched high on the back, centred, the etch filled with the speaker's own colour, deeper.


Notes

barkhorn: Two-way horn loudspeaker after Friendly Pressure, the Cloud: tinted cast acrylic, no wood


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Scale 1:10. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.




FROM THE RIGHT

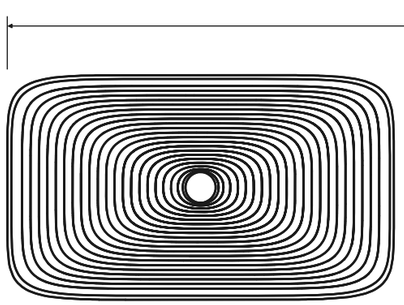



FRONT

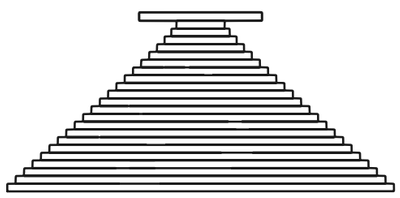

FROM ABOVE



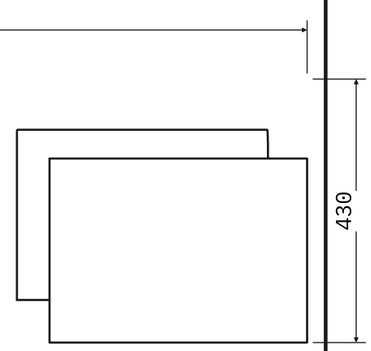



General arrangement

barkhorn: Tropos horn: the forming trial's plug, and Plan B, the laminated horn

mm | issue 2026-10-31 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

BHH-001 rev A


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

3. horn-plan-b: cnc-mill, stock-cast-sheet; 4048 cm3 each; 2 for the set; 1:10


Plan B (make/plan-b.md, make/laminated-horn.md): the flare and the neck laminated from 22 layers of stock 12.7 mm (1/2 in) tinted cell-cast sheet, each layer faced to its pitch, and the boss; each layer CNC-cut to its outline (10 outside the air path), bonded with polymerising cement in a jig, annealed, and the air path machined through on 5 axes and polished smooth (the bond lines cross it flush); the outside stepped, a terrace a layer, each layer's edge polished; in place of the formed flare and the throat piece, on the same pod, cap, pads and posts

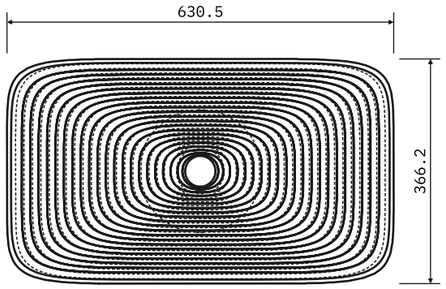

FRONT




FROM THE RIGHT

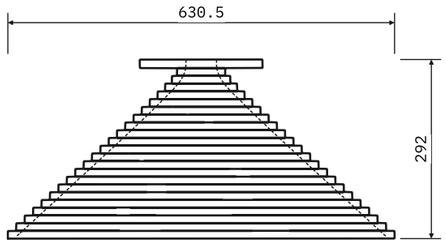


FROM ABOVE

4. horn-plan-b-smooth: cnc-mill, stock-cast-sheet; 2573 cm3 each; 2 for the set; 1:10


Plan B (make/plan-b.md, make/laminated-horn.md): the flare and the neck laminated from 22 layers of stock 12.7 mm (1/2 in) tinted cell-cast sheet, each layer faced to its pitch, and the boss; each layer CNC-cut to its outline (10 outside the air path), bonded with polymerising cement in a jig, annealed, and the air path machined through on 5 axes and polished smooth (the bond lines cross it flush); the outside machined smooth on 5 axes to follow the flare, then polished; the bond lines run round it as fine rings; in place of the formed flare and the throat piece, on the same pod, cap, ...

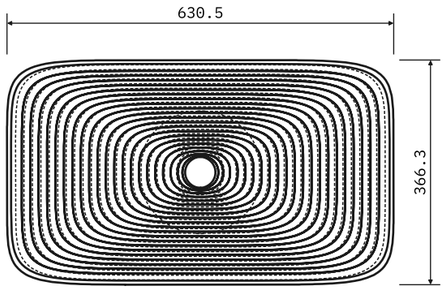

FRONT



FROM THE RIGHT

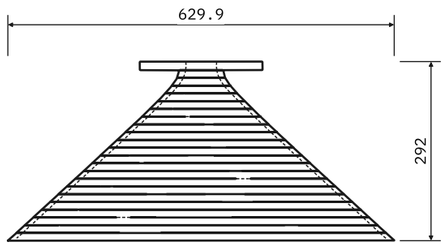

FROM ABOVE

Printed and machined parts

barkhorn: Tropos horn: the forming trial's plug, and Plan B, the laminated horn

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 2; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	horn-trial-plug	cnc-mill	1.0	High-temperature epoxy tooling board, glued up as a block, CNC-cut, sealed (the prototype's forming plug; lead time 3 to 4 weeks from the program)	419 × 273 × 287	1,927.72
2	horn-trial-base	cnc-mill	1.0	High-temperature epoxy tooling board, glued up as a block, CNC-cut, sealed (the prototype's forming plug; lead time 3 to 4 weeks from the program)	430 × 50 × 310	321.63
3	horn-plan-b	cnc-mill	2	Stock cell-cast acrylic sheet, 1/2 in (12.7 mm), tinted through in a standard colour (2423 Red for Ember; 2064 or 2074 Gray for Smoke), bought by the 48 × 96 sheet with no minimum (AC Plastics, 2423 at $835.80 a sheet, 2026-10-31; research	1000 × 1933 × 13	1,566.32
4	horn-plan-b-smooth	cnc-mill	2	Stock cell-cast acrylic sheet, 1/2 in (12.7 mm), tinted through in a standard colour (2423 Red for Ember; 2064 or 2074 Gray for Smoke), bought by the 48 × 96 sheet with no minimum (AC Plastics, 2423 at $835.80 a sheet, 2026-10-31; research	1000 × 1933 × 13	1,791.32

Notes

1. The forming trial (make/forming-trial.md): the production plug's surface cut to one quadrant at full scale, the throat end and the mouth's lower corner, its cut faces drafted outward; in high-temperature epoxy tooling board, on a board base; formed in stock 10 mm cast sheet and gauged before the full plug is cut. One set (the parts list counts it once).
2. Plan B (make/plan-b.md, make/laminated-horn.md): the flare and the neck laminated from 22 layers of stock 1/2 in tinted cell-cast sheet, each layer CNC-cut to its outline, bonded with polymerising cement in a jig, annealed, the air path machined through on 5 axes and polished; the outside stepped (horn-plan-b) or machined smooth (horn-plan-b-smooth). Each stands in the formed horn's place on the same pod, cap, pads and posts; the parts list counts both, one is chosen.

Parts list and notes

barkhorn: Tropos horn: the forming trial's plug, and Plan B, the laminated horn

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15