


Scale 1:10. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

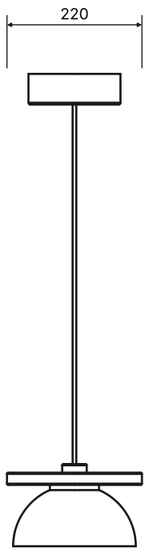

FROM THE RIGHT

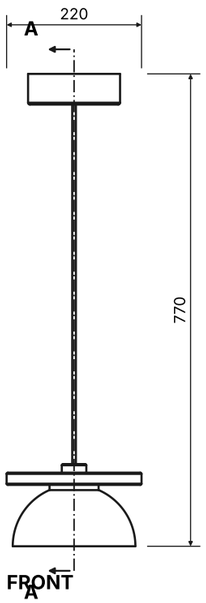

FRONT



FROM ABOVE


General arrangement

Moon pendant: Pendant lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. Section A-A (sheet 1): the product cut at x 0.0 and seen from the right; cut faces hatched, a different angle for each part.

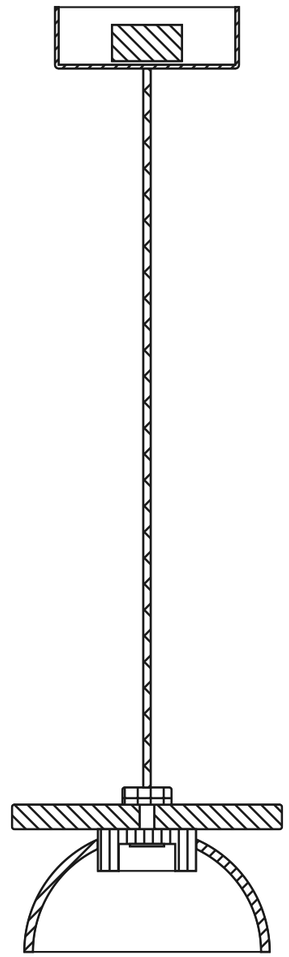


Section A-A

Moon pendant: Pendant lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:10, parts drawn apart. Balloons are the parts list's numbers (last sheet).

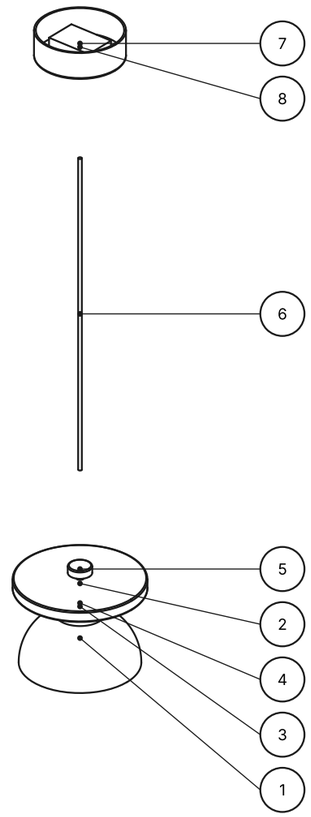

Exploded view

Moon pendant: Pendant lamp in cast acrylic, for bars


mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/disc.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø12.0	108.0	108.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

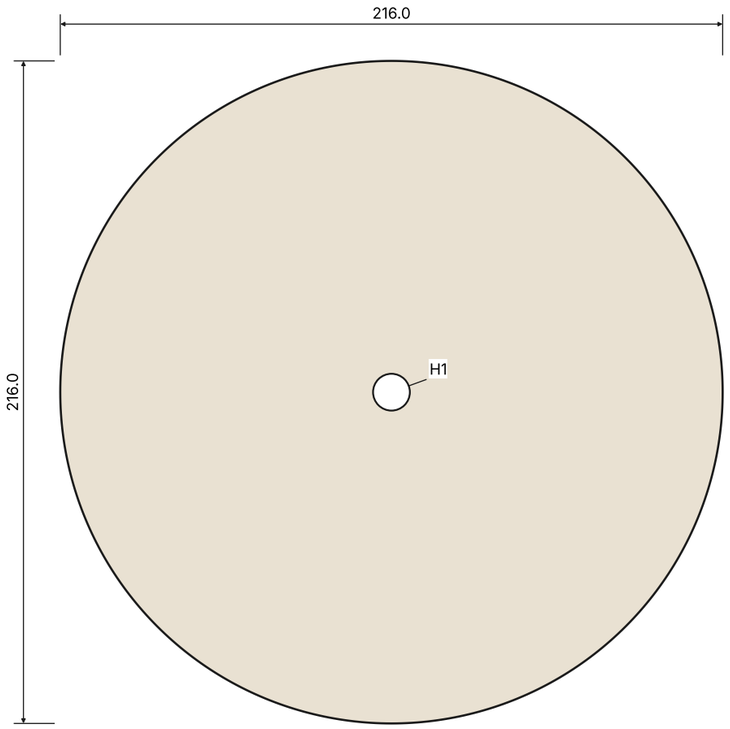

disc: 20 mm cast-acrylic, 1 for the set, seen from its outer face

not in the cut file: the 12 hole at 108, 108 rounded over from the outer face (2 faces, 45 to 45 deg off the sheet)

Sheet part: disc

Moon pendant: Pendant lamp in cast acrylic, for bars


mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

1. dome: lathe, cast-acrylic; 373 cm3 each; 1 for the set; 1:5


turned from cast block in the colour, 7 wall, frosted inside and out, its rim polished and eased



FRONT




FROM THE RIGHT




FROM ABOVE

3. hub: lathe, brass; 134 cm3 each; 1 for the set; 1:2


brass, satin, its 46 bore 22 deep a baffle: the COB sits 22 up inside it, so from below a seated guest sees the frost, not the source (cut-off about 46 deg from the vertical)



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Moon pendant: Pendant lamp in cast acrylic, for bars


mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

5. cap: lathe, brass; 17 cm3 each; 1 for the set; 1:1


clamps the disc to the hub through its 12 hole; the cord grip



FRONT




FROM THE RIGHT




FROM ABOVE

7. canopy: lathe, brass; 117 cm3 each; 1 for the set; 1:5


150 × 50, brass, satin (or blackened steel); holds the driver and the junction box strap



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Moon pendant: Pendant lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	dome	lathe	1	Cast acrylic tube, tinted through	210 × 210 × 102	344.16
2	disc	cut	1	20 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	216 × 216	22.16
3	hub	lathe	1	Brass C360	90 × 90 × 44	87.77
4	cob	buy	1	Bridgelux Vero SE 10 COB, 2700 K, CRI 90, about 1,100 lm at 700 mA (confirm its forward voltage sits in the driver's 16 to 24 V), with an Ideal Chip-Lok holder, in the brass hub on its own heat sink		12.00
5	cap	lathe	1	Brass C360	50 × 50 × 24	52.20
6	cord	buy	1	Black textile-braided 3-core 0.75 mm2 pendant cord, 3 m (cut to the drop), a cord grip in the canopy and a strain relief in the cap, and a mounting strap for a 4 in junction box		14.00
7	canopy	lathe	1	Brass C360	160 × 160 × 60	229.32
8	driver	buy	1	Mean Well PCD-16-700B, constant current 700 mA, 16 to 24 V, phase-cut dimmable (TRIAC, leading and trailing edge: confirm leading), UL8750 Class 2, 84 × 57 x 29.5: in the canopy		18.29
9	listing	buy	1	UL or Intertek (ETL) Listing the pendant to UL 1598 (and the table lamp's battery and charger to UL 153 / IEC 62368): a one-off cost a design, spread over the first run		[PRICE]

Notes

1. Mains: a Mean Well PCD-16-700B (phase-cut dimmable, UL8750 Class 2) in the canopy driving a 2700 K CRI 90 COB in the brass hub; the whole to be listed (UL 1598) as a fixture.
2. Cut-off: the COB sits 22 mm up a 46 bore in the hub, so seated guests see the lit frost, not the source.
3. Hang over a bar at 750 to 900 mm centres, the dome's rim 700 to 800 above the counter; over a booth, one per table, the rim about 650 above it.

Parts list and notes

Moon pendant: Pendant lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15