


Scale 1:5. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

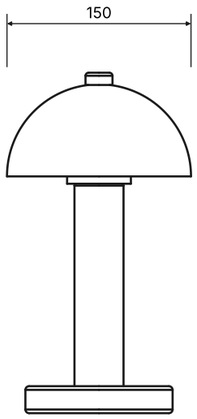

FROM THE RIGHT

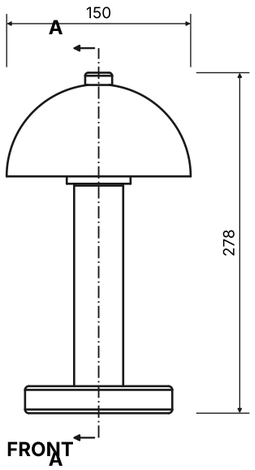



FROM ABOVE


General arrangement

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. Section A-A (sheet 1): the product cut at x 0.0 and seen from the right; cut faces hatched, a different angle for each part.

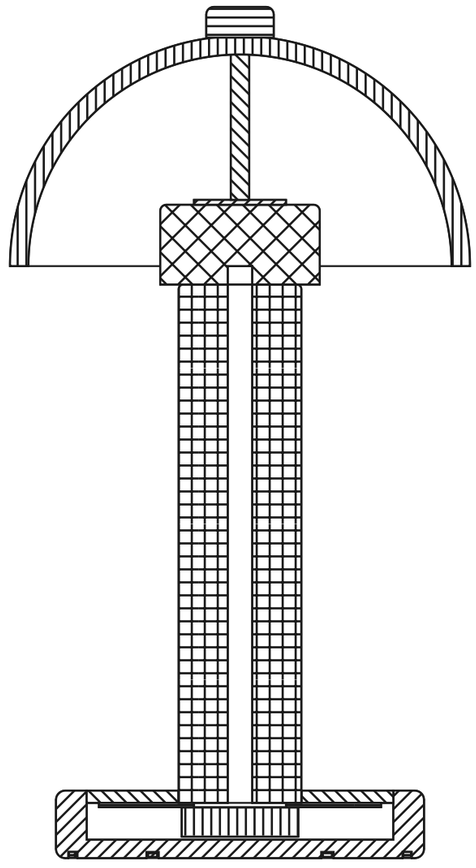


Section A-A

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2, parts drawn apart. Balloons are the parts list's numbers (last sheet).

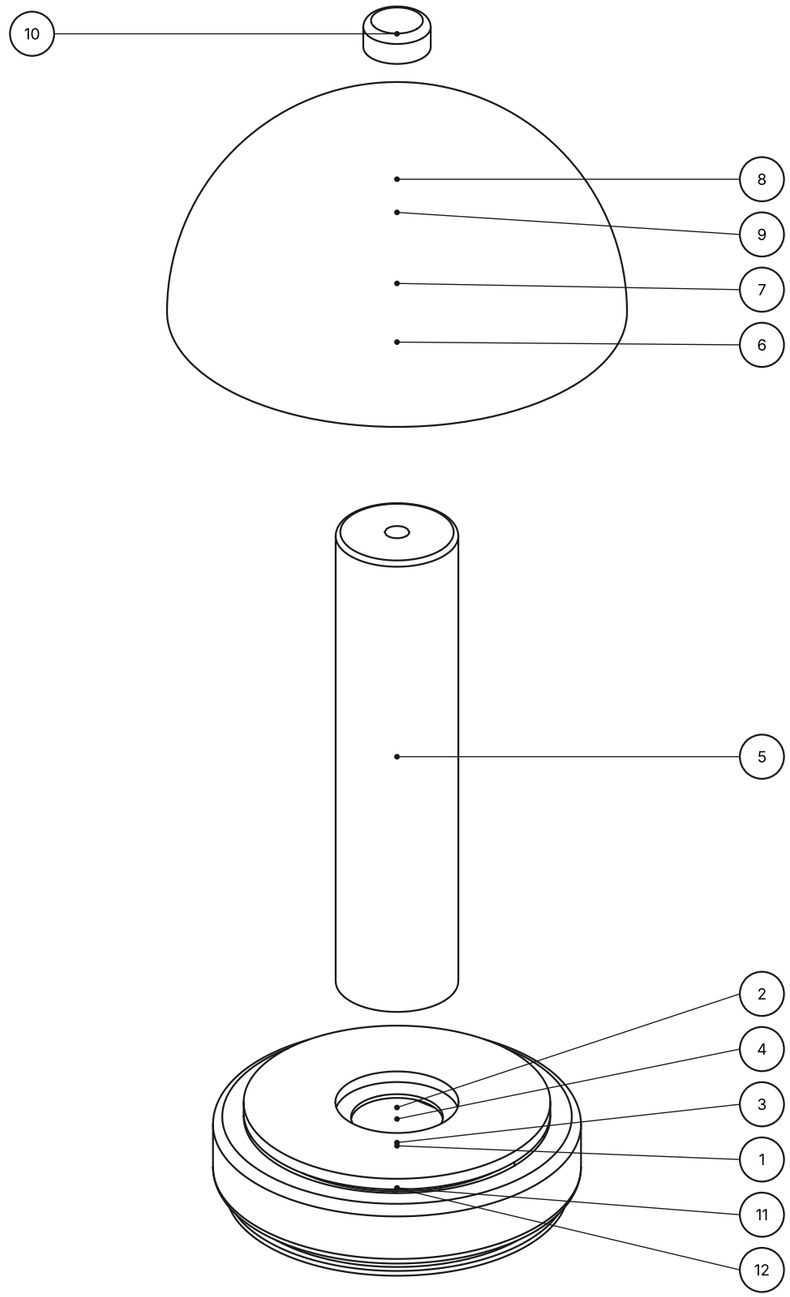

Exploded view

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars


mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

1. foot: lathe, steel; 118 cm3 each; 1 for the set; 1:2


mild steel, blackened (hot-blackened and waxed, or black e-coat for wiping); its weight keeps the lamp down: about 1.5 kg



FRONT




FROM THE RIGHT

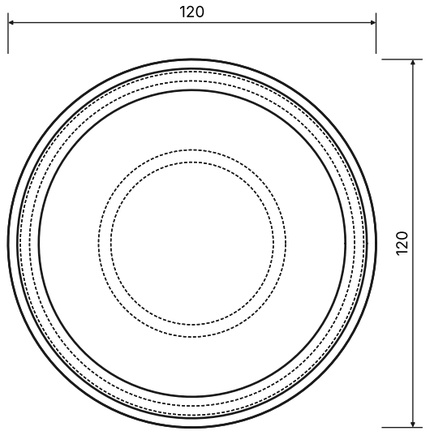


FROM ABOVE

2. lid: lathe, steel; 26 cm3 each; 1 for the set; 1:2


closes the pocket on an O-ring; the column passes through it



FRONT



FROM THE RIGHT

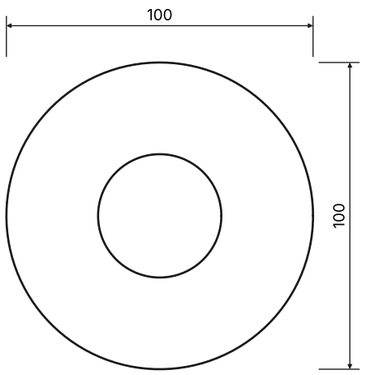

FROM ABOVE

Printed and machined parts

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars


mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

5. column: lathe, cast-acrylic; 204 cm3 each; 1 for the set; 1:5


cast acrylic rod 40 in the colour, turned, its 8 bore reamed and its outside and top polished; lit from below by four LEDs in the lid, so its polished top edge glows



FRONT




FROM THE RIGHT




FROM ABOVE

6. hub: lathe, brass; 55 cm3 each; 1 for the set; 1:1


brass, satin; the LED board on its top face, facing up into the dome, its heat into the brass

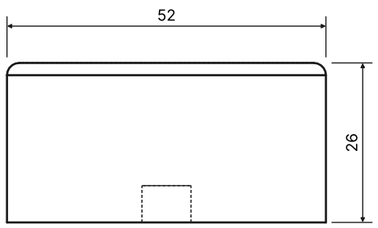

FRONT

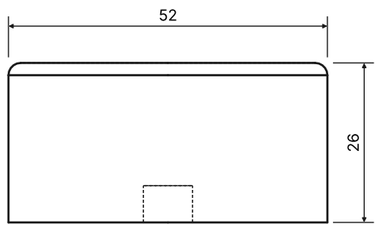

FROM THE RIGHT

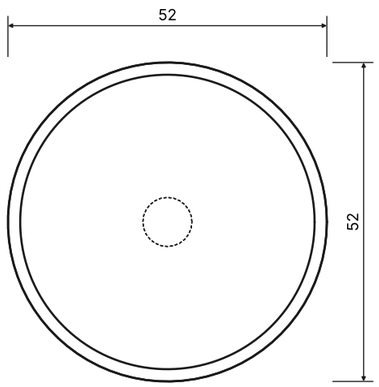

FROM ABOVE

Printed and machined parts

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars


mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

8. rod: lathe, brass; 1 cm3 each; 1 for the set; 1:1


M6 brass, the dome screwed down on it by the finial; the touch electrode

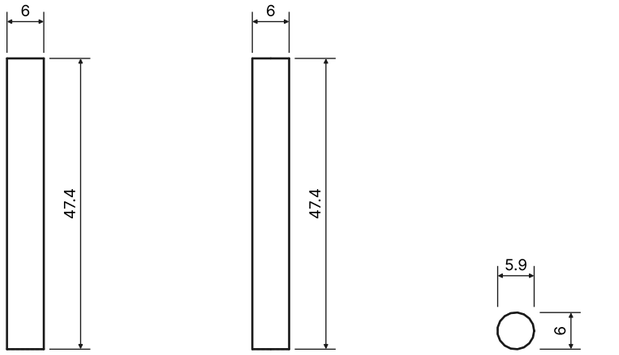

FRONT **FROM THE RIGHT** **FROM ABOVE**

9. dome: lathe, cast-acrylic; 196 cm3 each; 1 for the set; 1:5

turned from cast block in the colour, 6 wall, its inside bead-blasted satin and its outside honed: a frosted dome; its rim polished and eased

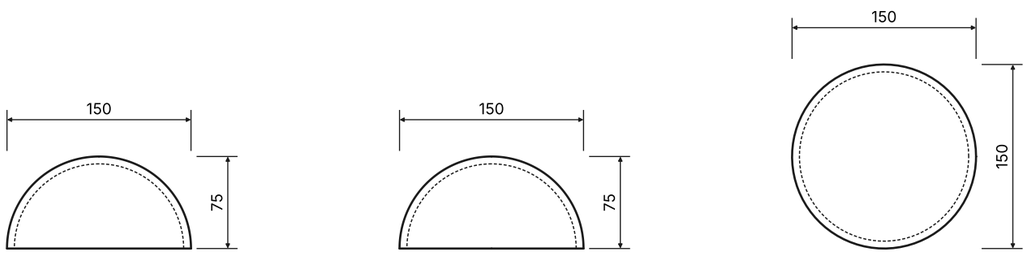

FRONT **FROM THE RIGHT** **FROM ABOVE**

Printed and machined parts

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars


mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

10. finial: lathe, brass; 4 cm3 each; 1 for the set; 1:1


the touch: tap to switch, hold to dim



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	foot	lathe	1	Mild steel	130 × 130 × 32	50.41
2	lid	lathe	1	Mild steel	110 × 110 × 14	46.69
3	battery	buy	1	Samsung SDI INR18650-35E Li-ion cells, 3,500 mAh, two in parallel in a welded pack with its own protection board and an NTC (7.0 Ah at 3.6 V: about 25 Wh, 12 h at the 2 W bar setting)		14.00
4	board	buy	1	to make (a contract PCB house) The table lamp's board: a USB-C and pogo-pin charger (TI BQ25895 kind), a capacitive touch dimmer on the brass finial (stepless, 2200 to 2700 K warm-dim mixing two LED channels), a low-battery blink,		22.00
5	column	lathe	1	Cast acrylic tube, tinted through	50 × 50 × 179	62.90
6	hub	lathe	1	Brass C360	62 × 62 × 36	61.61
7	led	buy	1	Nichia or Seoul (to choose) A 30 mm round warm-dim LED board, two channels (2200 K and 2700 K, CRI 90+), about 2.5 W at full, 200 lm; a second 4-LED ring at the column's foot to light the column (0.3 W)		9.00
8	rod	lathe	1	Brass C360	16 × 16 × 57	46.76
9	dome	lathe	1	Cast acrylic tube, tinted through	160 × 160 × 85	212.04
10	finial	lathe	1	Brass C360	32 × 32 × 20	47.46
11	foot-ring	buy	1	Two EPDM O-rings (the column in the foot, the hub's lid), a silicone foot ring 110 x 3 (Shore 40, non-slip, wipeable), a USB-C port with a rubber plug: IP44		4.00
12	contacts	buy	1	Mill-Max (or alike) Two gold-plated spring-loaded contact pins in the tray, two flat gold rings in the foot's underside, and a 5 V tray of six (the staff's charging tray, its own product)		6.00

Notes

1. Cordless: two 18650 cells (25 Wh) sealed in the foot; about 12 hours at the bar setting (2 W), 6 at full; charged on the staff tray through two gold rings underneath, or by USB-C (its plug rubber-sealed).
2. No LED in sight: the board faces up inside the frosted dome, under a seated guest's eye line; a touch on the brass finial switches it, holding dims it, 2200 to 2700 K as it dims (two channels mixed).
3. Splash-proof (IP44): the foot sealed by the lid's O-ring and the column's; nothing on top where a drink can pool (the dome sheds, the finial is round). Wipe with a damp cloth; no solvents on the acrylic.
4. The acrylic: the column a 40 rod and the dome turned from cast block, both in the colour (the eight Atmosphere tints, clear, frosted, smoked); polished where it shows an edge, the dome frosted; never thin sheet.

Parts list and notes

Moon table: Cordless rechargeable table lamp in cast acrylic, for bars

mm | issue 2026-10-19 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15