


Scale 1:5. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

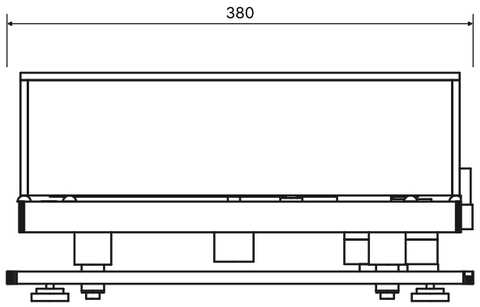

FROM THE RIGHT

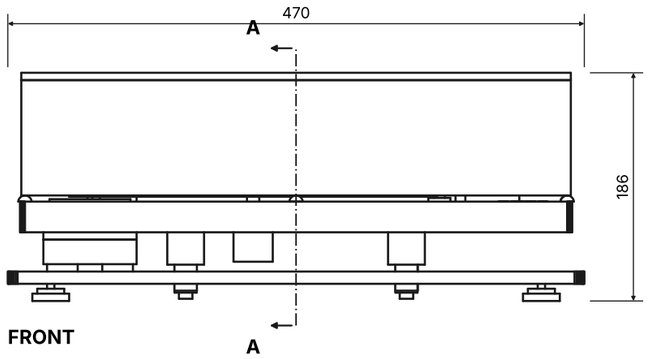

FRONT

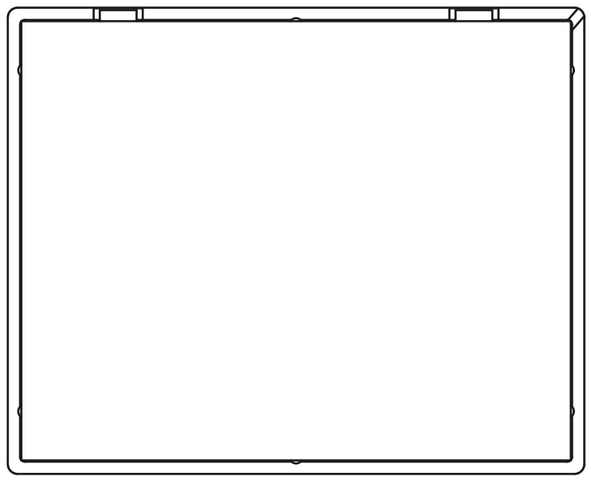

FROM ABOVE


General arrangement

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. Section A-A (sheet 1): the product cut at x 235.0 and seen from the right; cut faces hatched, a different angle for each part.

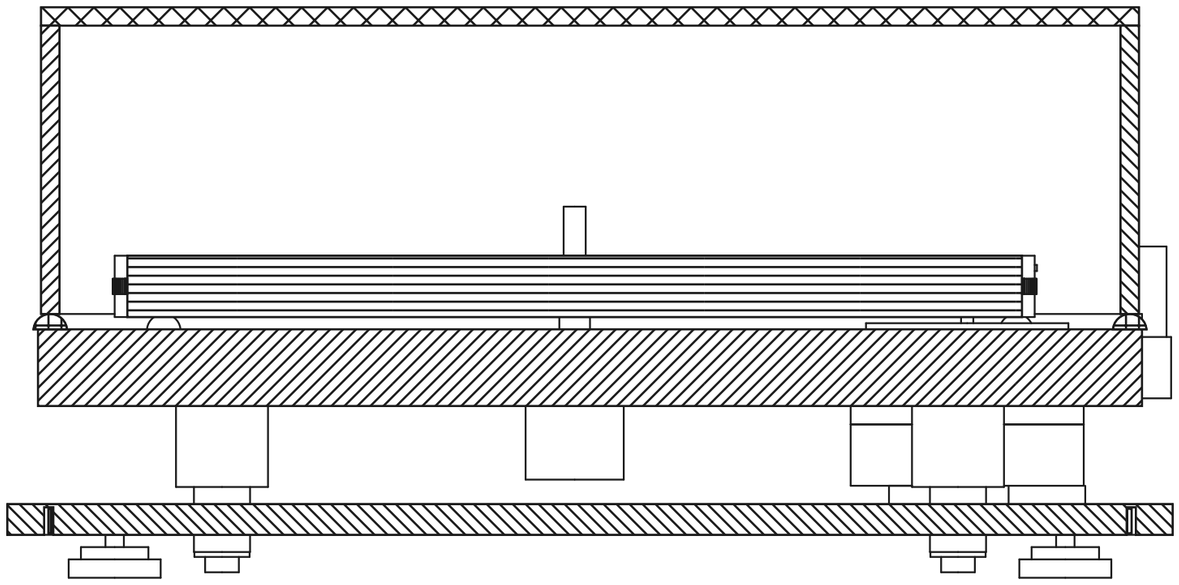


Section A-A

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5, parts drawn apart. Balloons are the parts list's numbers (last sheet).

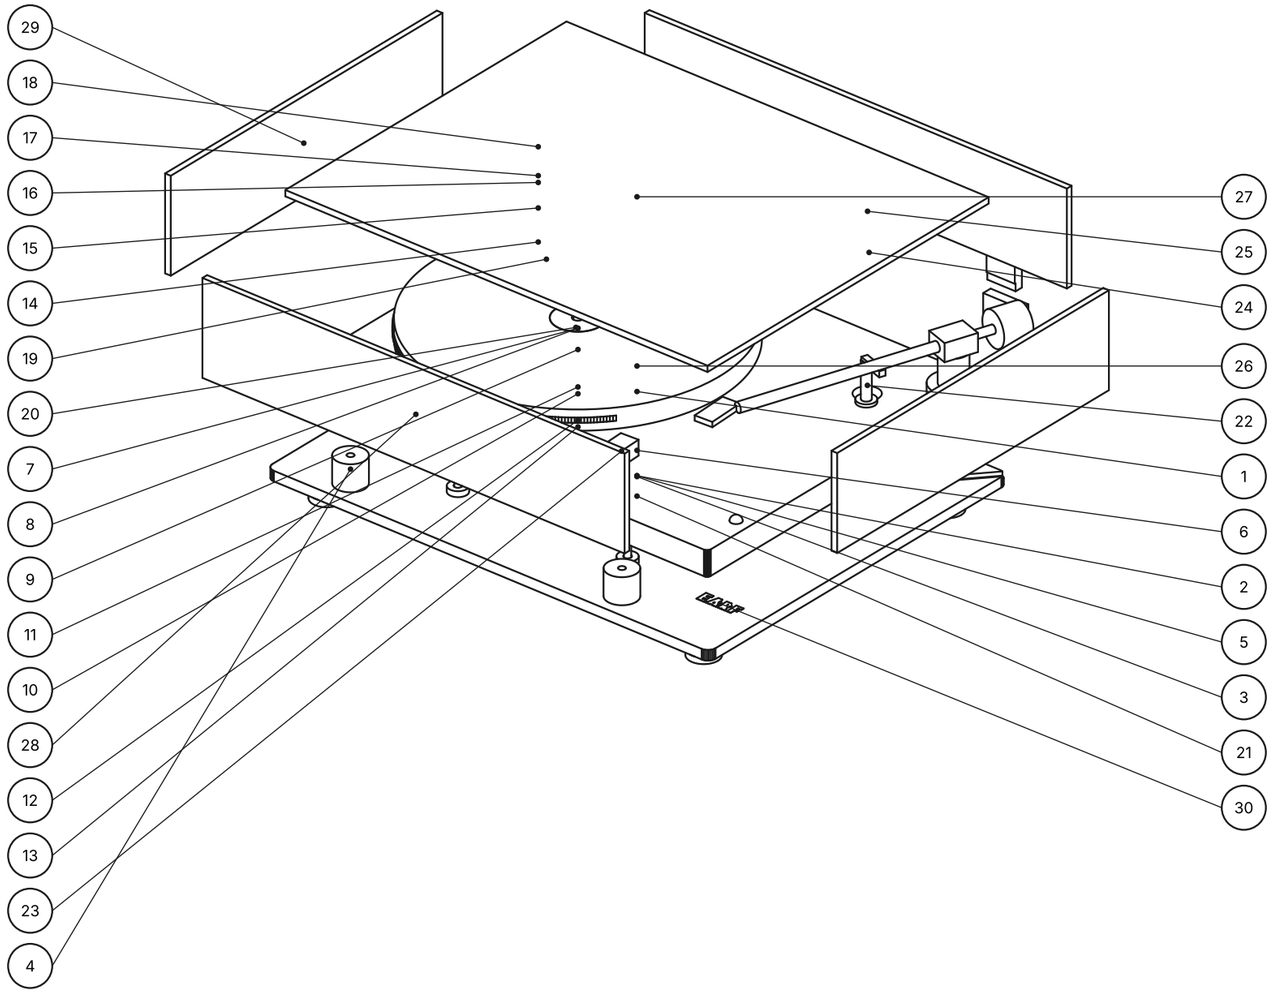


Exploded view

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. Panels cut to their outline only (DXF files in dxf/); sizes as seen from the outer face.




hinge-blocks

20 mm cast-acrylic, 1 for the set

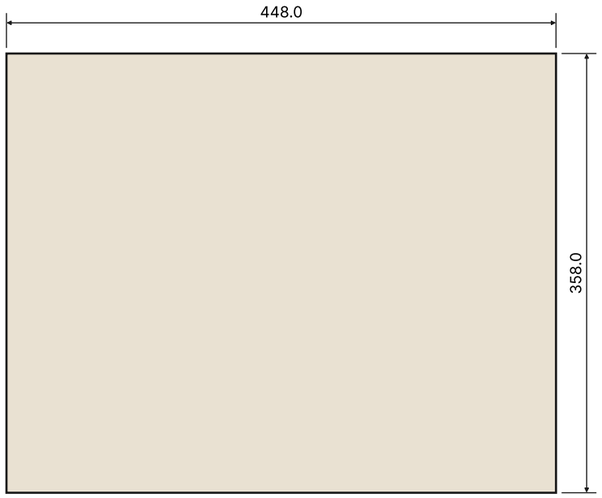


lid-top

6 mm cast-acrylic, 1 for the set

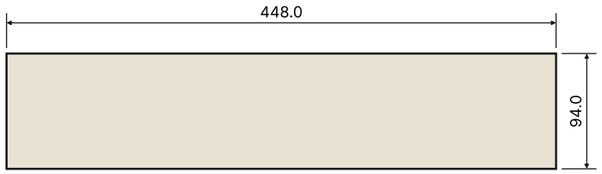

lid-front, lid-back

6 mm cast-acrylic, 2 for the set

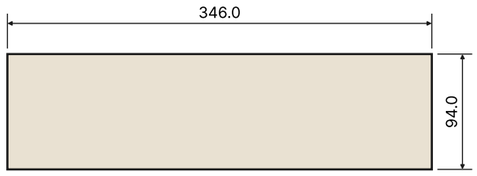

lid-left, lid-right

6 mm cast-acrylic, 2 for the set


Sheet parts: plain panels

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth.dxf. Marks listed at the right.

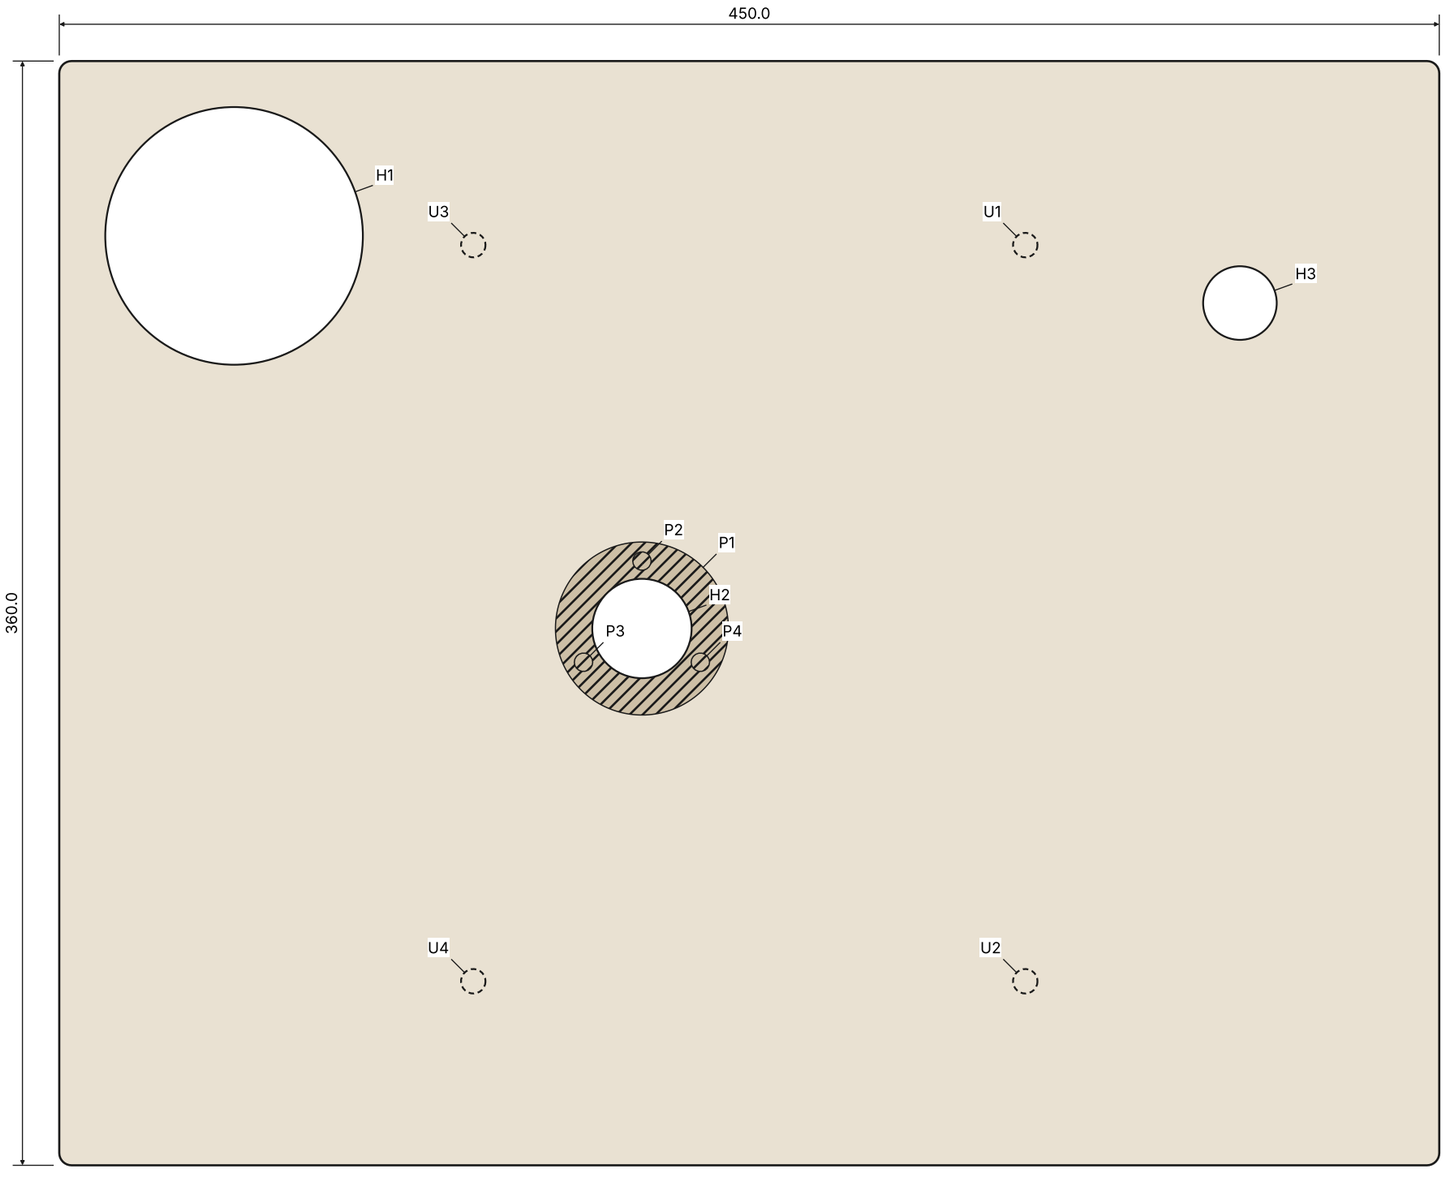

mark	size	x	y	depth
P1	Ø56.4	190.0	175.0	6 from face
P2	Ø6.0	190.0	197.0	16 from face
P3	Ø6.0	170.9	164.0	16 from face
P4	Ø6.0	209.1	164.0	16 from face
H1	Ø84.0	57.0	303.0	through
H2	Ø32.4	190.0	175.0	through
H3	Ø24.0	385.0	281.1	through
U1	Ø8.0	315.0	300.0	12 from inside
U2	Ø8.0	315.0	60.0	12 from inside
U3	Ø8.0	135.0	300.0	12 from inside
U4	Ø8.0	135.0	60.0	12 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


plinth: 25 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/plinth-underside.dxf (seen from that face)

Sheet part: plinth

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/base.dxf. Marks listed at the right.

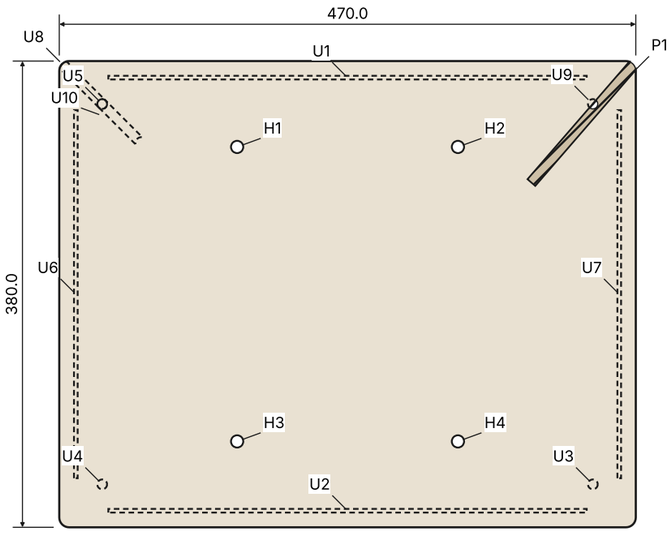

mark	size	x	y	depth
P1	profile (DXF)	425.9	329.0	4 from face
H1	Ø10.0	145.0	310.0	through
H2	Ø10.0	325.0	310.0	through
H3	Ø10.0	145.0	70.0	through
H4	Ø10.0	325.0	70.0	through
U1	390.0 x 3.0	235.0	366.5	9 from inside
U2	390.0 x 3.0	235.0	13.5	9 from inside
U3	Ø8.0	435.0	35.0	7 from inside
U4	Ø8.0	35.0	35.0	7 from inside
U5	Ø8.0	35.0	345.0	7 from inside
U6	3.0 x 300.0	13.5	190.0	9 from inside
U7	3.0 x 300.0	456.5	190.0	9 from inside
U8	profile (DXF)	19.1	360.9	4 from inside
U9	profile (DXF)	434.3	345.5	7 from inside
U10	profile (DXF)	49.9	330.1	4 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

base: 10 mm cast-acrylic, 1 for the set, seen from its outer face

inner-face pockets: dxf/base-underside.dxf (seen from that face)

not in the cut file: 1 opening(s) in the inner face that reach neither face nor a pocket


Sheet part: base

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/platter.dxf. Marks listed at the right.

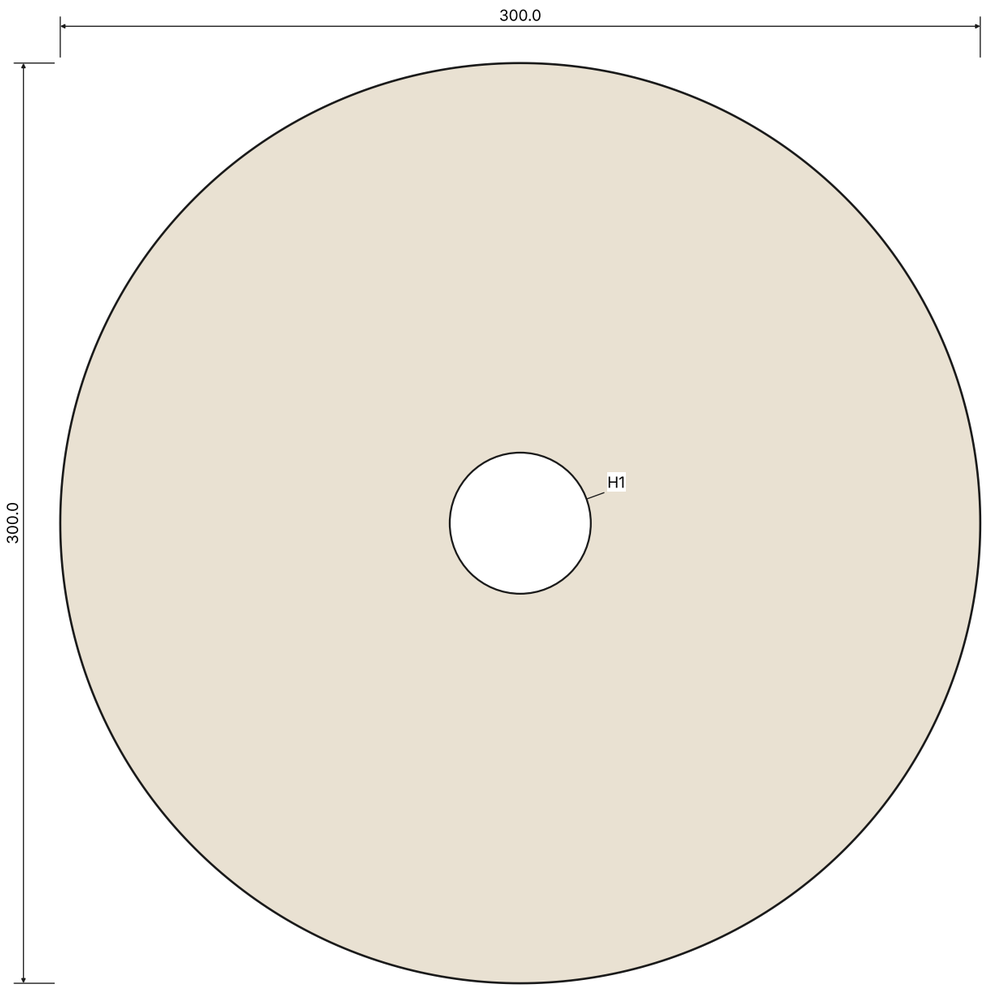

platter: 20 mm cast-acrylic, 1 for the set, seen from its outer face

mark	size	x	y	depth
H1	Ø46.0	150.0	150.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: platter

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base


mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-1.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø10.0	38.0	38.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

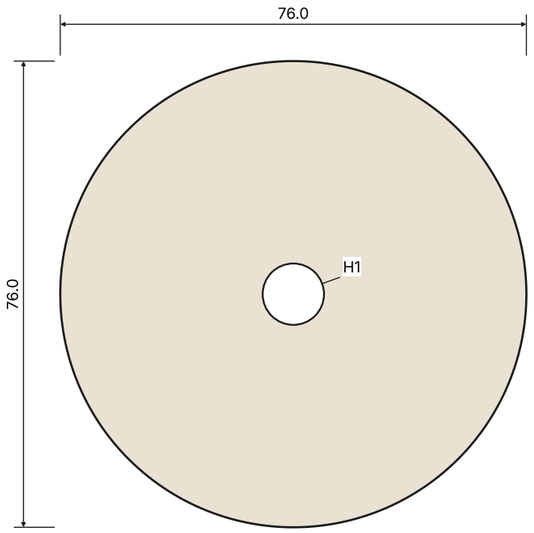

pod-1: 20 mm cast-acrylic, 1 for the set, seen from its outer face

Sheet part: pod-1

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base


mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-2.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø56.0	38.0	38.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

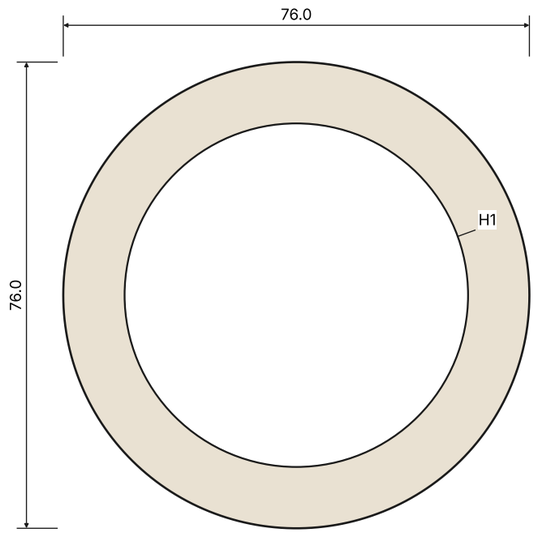

pod-2: 20 mm cast-acrylic, 1 for the set, seen from its outer face


Sheet part: pod-2

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-3.dxf. Marks listed at the right.

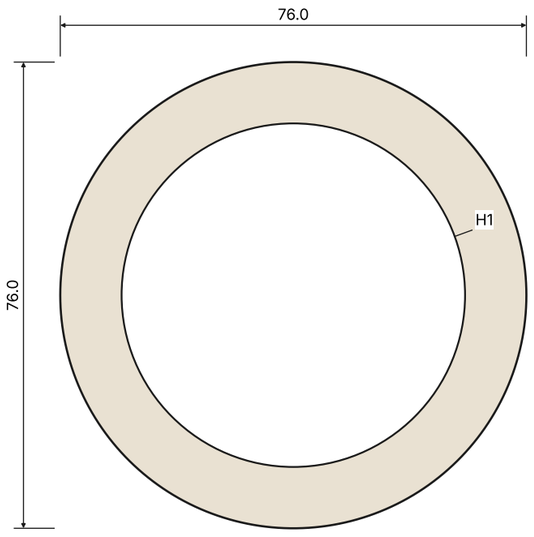

pod-3: 10 mm cast-acrylic, 1 for the set, seen from its outer face

mark	size	x	y	depth
H1	Ø56.0	38.0	38.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: pod-3

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base


mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

4. post-1, post-2, post-3, post-4: lathe, cast-acrylic; 18 cm3 each; 4 for the set; 1:1


water-clear cast acrylic rod 30, bored 6.6, faced and polished; cemented under the plinth on a jig



FRONT




FROM THE RIGHT




FROM ABOVE

8. platter-hub: lathe, brass; 32 cm3 each; 1 for the set; 1:1


bonded into the platter with a structural acrylic adhesive; bored after, true to the spindle



FRONT



FROM THE RIGHT

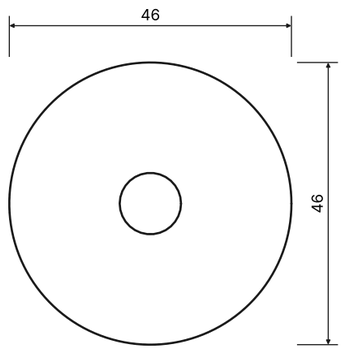

FROM ABOVE

Printed and machined parts

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base


mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

9. spindle: lathe, stainless; 5 cm3 each; 1 for the set; 1:2

440C or hardened 416, ground to 10 h5; the record spindle 7.2; a 6 cup at its foot for the ball; pressed and bonded into the hub



FRONT




FROM THE RIGHT




FROM ABOVE

10. bearing-housing: lathe, brass; 42 cm3 each; 1 for the set; 1:1


C360 brass; the bushes pressed in and reamed in line; filled with 2 ml of oil; hangs 8 over the base

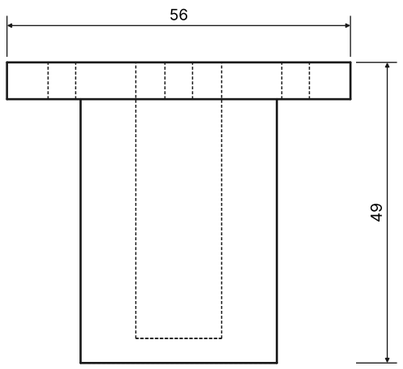

FRONT

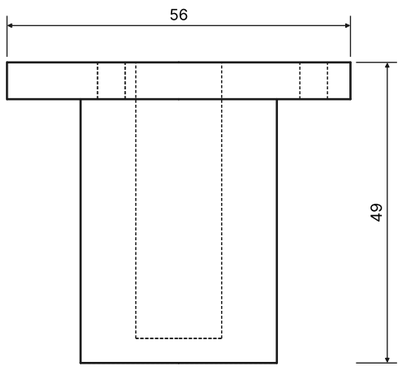

FROM THE RIGHT

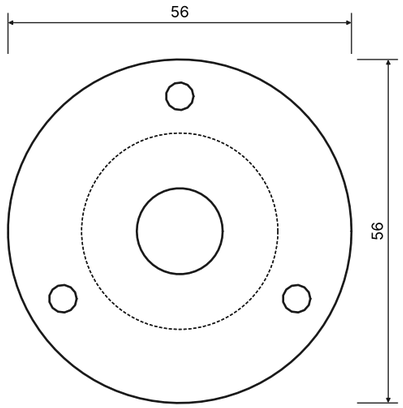

FROM ABOVE

Printed and machined parts

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base


mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

18. pulley: lathe, aluminium; 15 cm3 each; 1 for the set; 1:1


its belt face 39.48 at 250 rpm (Neo, 33.3); turned to the motor's measured speed; the Neo trims the rest



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	plinth	cut	1	25 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	450 × 360	96.19
2	base	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	470 × 380	42.42
3	led-strip	buy	1	Ledco LCLS24V-24W-27K-IP22: 24 V, 4.8 W/m, 8 mm, 2700 K, CRI 90+, dimmable, 5 m roll (1.42 m used, in four straight runs standing in the base's slot, facing out)		58.00
4	post-1, post-2, post-3, post-4	lathe	4	Cast acrylic tube, tinted through	40 × 40 × 36	17.33
5	bushings	buy	1	Isolate It (Sorbothane Inc.) Sorbothane vibration isolation bushings, 30 duro, 0.28 in ID x 0.72 in OD x 0.22 in thick (7.1 × 18.3 × 5.6), a 12-pack: two at each post (eight), one over and one under the base on the M6 bolt; about 1.8 kg on each		25.00
6	float-bolts	buy	1	Four M6 × 70 stainless socket cap bolts, four 18 mm stainless washers, four M6 nyloc nuts (the float's hold-downs, snug only)		8.00
7	platter	cut	1	20 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	300 × 300	42.75
8	platter-hub	lathe	1	Brass C360	56 × 56 × 30	56.29
9	spindle	lathe	1	Stainless steel 304	20 × 20 × 87	126.04
10	bearing-housing	lathe	1	Brass C360	66 × 66 × 59	75.84
11	bushes	buy	1	Oil-impregnated sintered bronze plain bushes 10 × 14 × 12, a pair (Oilite kind), reamed to a 0.01 running fit on the spindle after pressing		8.00
12	ball	buy	1	Tungsten carbide ball, 6 mm, grade 10: the spindle's thrust point, seated in a cup at the spindle's foot		5.00
13	thrust-pad	buy	1	Thrust pad, PTFE (or PEEK), 13.8 × 2, at the bottom of the housing's bore, under the ball		3.00
14	pod-1	cut	1	20 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	76 × 76	2.74
15	pod-2	cut	1	20 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	76 × 76	2.74
16	pod-3	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	76 × 76	1.37
17	motor	buy	1	Rega 24 V low-vibration synchronous motor upgrade kit (motor, its board and mounting), for the Neo PSU		200.00
18	pulley	lathe	1	Aluminium 6061	55 × 55 × 22	46.69
19	pod-pads	buy	1	Isolate It (or alike) Sorbothane discs 25 × 6, Shore 30, a set of 3, under the motor's pod (about 0.6 kg on them: soft, so the motor's hum stays in the pod)		15.00
20	belt	buy	1	Flat turntable belt, ground rubber or polyurethane, 5 wide x 0.6, about 975 long unstretched (1025 round the platter's rim and the 40 pulley, stretched 5 %)		25.00
21	feet	buy	1	any (Essentra, Kipp, Elesa kind) Four levelling feet, M6 × 20 stud, 30 mm base with an anti-slip rubber pad, the stud into M6 brass inserts bonded into the base		24.00
22	arm	buy	1	Rega RB330 tonearm (9 in, Rega geometry: 222 mm from the platter's centre to the arm's hole, effective length 236.5, overhang 14.5, offset 21.55 deg), with its own lead and cueing lift		675.00
23	cartridge	buy	1	Ortofon 2M Black moving-magnet cartridge (nude Shibata stylus), black body, 1/2 in mount		750.00
24	hinge-blocks	cut	1	20 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	40 × 10	0.18

Parts list (1 of 2)

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
25	hinges	buy	1	Pro-Ject Replacement dust cover hinge for Debut series (rp-611), two: friction hinges that hold the lid open at any angle, a spring blade clamped to the lid's back wall, the foot in a slot (here a pocket in an acrylic block on the plinth's		34.00
26	fixings	buy	1	Brass threaded inserts (4 M6 for the feet, 4 M6 for the posts' bolts, 4 M4 for the hinge blocks, 3 M4 for the bearing's flange), M4 stainless button screws, two clear Heyco-kind cord grips (motor and light), 3M Bumpon SJ5302 clear x 6 under		22.00
27	lid-top	cut	1	6 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	448 × 358	22.85
28	lid-front, lid-back	cut	2	6 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	448 × 94	6.00
29	lid-left, lid-right	cut	2	6 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	346 × 94	4.63
30	mark	buy	1	Laser etching into the cast acrylic, frosted, about 0.1 deep, from a vector file: EARF 44 wide, the etch filled with the colour, deeper		15.00
31	neo-psu	buy	1	Rega Neo PSU MK2: DSP-generated drive for Rega's 24 V motor, 33/45 by a button, fine speed trim (0.01 rpm steps) on the back; US 60 Hz 115-120 V version		445.00
32	led-adapter	buy	1	Mean Well GST25A24-P1J desktop adapter, 24 V DC 1.04 A (25 W), level VI, IEC C8 inlet, 2.1 mm plug; UL/cUL 62368-1 listed, a Class 2 / limited power source (the strip draws 6.8 W)		19.00
33	led-dimmer	buy	1	LEDSupply Single Color Mini Rotary Dimmer, 12-24 V DC PWM, in its own housing, in line on the 24 V lead behind the record player (2.1 mm in and out), on/off at the end of its turn		9.00
34	bearing-fixings	buy	1	Three M4 brass threaded inserts bonded with epoxy into 6 holes in the pocket's floor, three M4 × 10 black socket button heads: the bearing's flange		5.00
35	bearing-oil	buy	1	Turntable bearing oil, 8 ml (a light synthetic oil, ISO VG 32 or as the bush maker says)		15.00
36	cement	buy	1	Two-part polymerising acrylic cement for cast sheet (Acrifix 1R 0192 kind), clear: the cemented layers (a 100 g kit does one piece)		20.00

Parts list (2 of 2)

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Notes

1. The plinth: one 25 mm sheet of tinted cast acrylic (the Clouds' own, in the colour), 450 × 360, corners R4, edges eased and polished, annealed after machining. The base: 10 mm of the same, 470 × 380, R8, its outer edge polished all round.
2. The float: four water-clear posts (30 rod, bored 6.6) cemented under the plinth; each stands on a Sorbothane bushing (30 duro, 18.3 × 7.1 × 5.6) on the base, with a second under the base, a washer and a nyloc nut on an M6 stainless bolt into a brass insert in the plinth. Snug the nuts by hand: the bushings carry about 1.8 kg each.
3. The light: a 24 V, 4.8 W/m strip in four straight runs standing in a 3 × 9 slot routed up into the base from below, 12 in from the edge, the LEDs facing out. Behind a listed Mean Well 24 V adapter and an in-line dimmer. 6.5 W at full; the slot is open below, so the strip breathes into the 14 mm under the base.
4. The motor stands apart: its pod (two 20 and one 10 discs, 76 across) on three soft Sorbothane pads on the base, up through an 84 hole in the plinth, 4 mm clear all round. Nothing touches the plinth from the motor but the belt.
5. The platter: 20 mm of the same acrylic, 300 across; the brass hub bonded in, the spindle pressed and bonded into the hub, the whole balanced. The belt on its polished rim. No mat.
6. The bearing: a turned brass housing through the plinth, flanged into a pocket in its top on three M4 screws into bonded inserts; two sintered bronze bushes; a ground stainless spindle on a 6 mm carbide ball on a PTFE pad. Oiled.
7. Speed: Rega's 24 V motor driven by the Neo PSU MK2 (33/45 by a button, 0.01 rpm trim); the pulley turned to the motor's measured speed.
8. Arm: Rega RB330 at Rega's 222 from the spindle, its nut under the 25 mm plinth; its lift on the plinth beside it; an Ortofon 2M Black. Level the platter on the four feet before setting the arm.
9. The lid: 6 mm of the same acrylic, cemented as a box 448 × 358 × 100, on six clear bumpers, on Pro-Ject's two friction hinges in acrylic blocks on the plinth's back edge. Open, it leans back about 12 degrees past upright and needs 100 mm behind the base.
10. The mark: EARF 40 wide laser-etched at the plinth's front right and filled with the colour, deeper.

Notes

Float: Belt-drive record player in tinted cast acrylic, floating over a lit base

mm | issue 2026-10-22 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

EF-016 rev A