


Scale 1:10. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.



FROM THE RIGHT

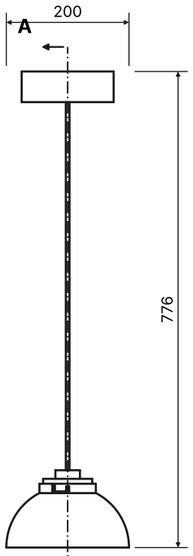

FRONT



FROM ABOVE

General arrangement


Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

EDP-001 rev A

Scale 1:5. Section A-A (sheet 1): the product cut at x 0.0 and seen from the right; cut faces hatched, a different angle for each part.

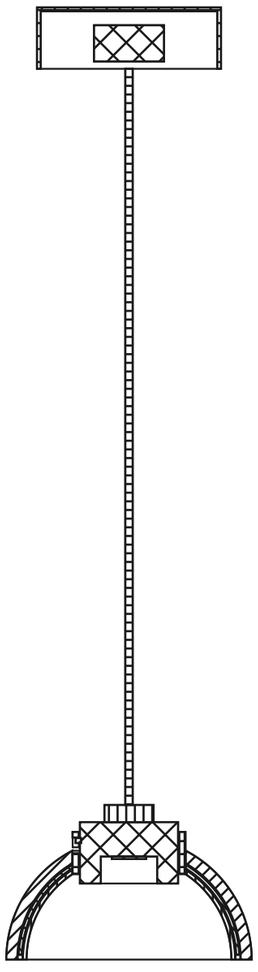


Section A-A

Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:10, parts drawn apart. Balloons are the parts list's numbers (last sheet).

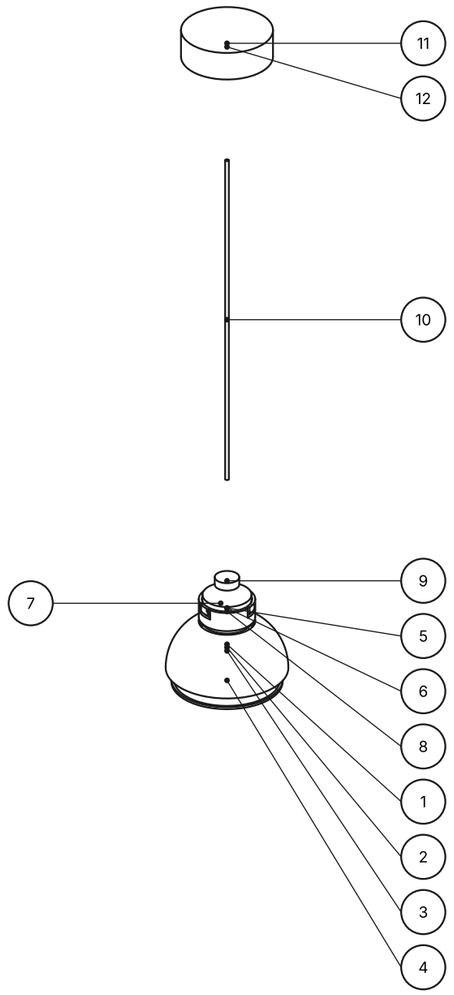

Exploded view

Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand


mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

1. shell: lathe, cast-acrylic; 452 cm3 each; 1 for the set; 1:5


the cover's outside: turned from cast block in the tint, 9 wall, polished inside and out



FRONT




FROM THE RIGHT




FROM ABOVE

2. liner: lathe, cast-acrylic; 100 cm3 each; 1 for the set; 1:5


the diffuser: a 2.5 cup turned in clear, bead-blasted both faces, bonded between the shell and the skin (or cast into the block: ask the caster)



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand


mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

3. skin: lathe, cast-acrylic; 114 cm3 each; 1 for the set; 1:5


the cover's inside: a 3 cup in the tint, polished, so the frost is seen only through acrylic



FRONT




FROM THE RIGHT




FROM ABOVE

4. rim: lathe, cast-acrylic; 9 cm3 each; 1 for the set; 1:5


closes the three layers at the mouth, bonded and polished with them



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand


mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

5. collar: mill, aluminium; 43 cm3 each; 1 for the set; 1:2


aluminium 6061, black anodised (type II, sealed), satin: bonded into the crown; three L-slots, a quarter-turn bayonet (30 deg); the cover lifts 5, turns and drops, its weight holding each pin up in its notch. Metal, not acrylic: acrylic is brittle and notch-sensitive, so the slots would wear and crack under the quarter turns, and it softens near the COB



FRONT




FROM THE RIGHT

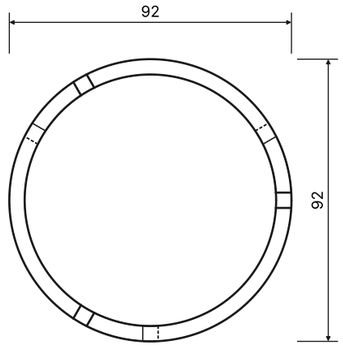


FROM ABOVE

6. hub: lathe, aluminium; 215 cm3 each; 1 for the set; 1:2


aluminium 6061, black anodised, satin: the COB's heat sink and its baffle (the COB 22 up the 46 bore, the cut-off), the pins pressed in, the spring plunger the detent



FRONT



FROM THE RIGHT

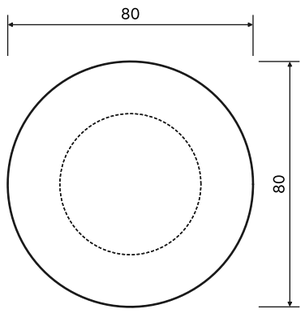

FROM ABOVE

Printed and machined parts

Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand


mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

9. gland: lathe, cast-acrylic; 18 cm3 each; 1 for the set; 1:1


the cap: black cast acrylic, polished, over the nylon cord grip (the strain relief), on two M3 into the hub



FRONT




FROM THE RIGHT




FROM ABOVE

11. canopy: lathe, cast-acrylic; 118 cm3 each; 1 for the set; 1:5


150 × 50, black cast acrylic, polished: over the driver and a steel junction-box strap (the strap carries the load)



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	shell	lathe	1	Cast acrylic tube, tinted through	210 × 210 × 99	339.09
2	liner	lathe	1	Cast acrylic tube, tinted through	190 × 190 × 83	244.97
3	skin	lathe	1	Cast acrylic tube, tinted through	183 × 183 × 83	236.36
4	rim	lathe	1	Cast acrylic tube, tinted through	192 × 192 × 14	65.26
5	collar	mill	1	Aluminium 6061	102 × 102 × 44	56.44
6	hub	lathe	1	Aluminium 6061	90 × 90 × 60	57.15
7	pins	buy	1	Three stainless dowel pins 4 × 8 (ISO 8734), pressed into the hub: the bayonet's pins		1.50
8	cob	buy	1	Bridgelux Vero SE 10 COB, 2700 K, CRI 90, about 1,100 lm at 700 mA (confirm its forward voltage sits in the driver's 16 to 24 V), with an Ideal Chip-Lok holder, in the brass hub on its own heat sink		12.00
9	gland	lathe	1	Cast acrylic tube, tinted through	50 × 50 × 24	47.40
10	cord	buy	1	Black textile-braided 3-core 0.75 mm2 pendant cord, 3 m (cut to the drop), a cord grip in the canopy and a strain relief in the cap, and a mounting strap for a 4 in junction box		14.00
11	canopy	lathe	1	Cast acrylic tube, tinted through	160 × 160 × 60	106.44
12	driver	buy	1	Mean Well PCD-16-700B, constant current 700 mA, 16 to 24 V, phase-cut dimmable (TRIAC, leading and trailing edge: confirm leading), UL8750 Class 2, 84 × 57 x 29.5: in the canopy		18.29
13	plunger	buy	1	Kipp or Misumi A stainless ball spring plunger M5, light force (about 10 N), threaded into the hub: the bayonet's detent, clicking into a dimple in the collar		4.50
14	listing	buy	1	UL or Intertek (ETL) Listing the pendant to UL 1598 (and the table lamp's battery and charger to UL 153 / IEC 62368): a one-off cost a design, spread over the first run		[PRICE]

Notes

1. The covers swap by hand: lift the dome 5 mm, turn it 30 degrees and lower it off. To fit one, line up the three slots, push up, turn until the plunger clicks, and let go: its weight holds each pin up in its notch, so a knock cannot turn it off. No tools, and the cover is never live (the COB, hub and driver stay up).
2. The wall is tint, frost, tint: a 9 mm tinted shell, a 2.5 mm frosted liner, a 3 mm tinted skin, closed at the mouth by a tinted rim. Nothing white is seen, from any side.
3. Mains: Mean Well PCD-16-700B (phase-cut dimmable, UL8750 Class 2) in the canopy, a 2700 K CRI 90 COB 22 mm up the hub's 46 bore (cut-off about 46 deg); the fixture listed to UL 1598 with any cover.
4. Hang over a bar at 750 to 900 centres, the rim 700 to 800 above the counter; over a booth, one a table, about 650.

Parts list and notes

Dome pendant: Pendant lamp in cast acrylic for bars, its covers swapping by hand

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15