


Scale 1:10. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

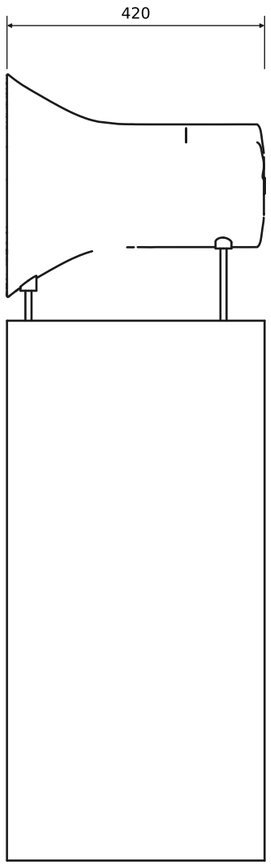

FROM THE RIGHT

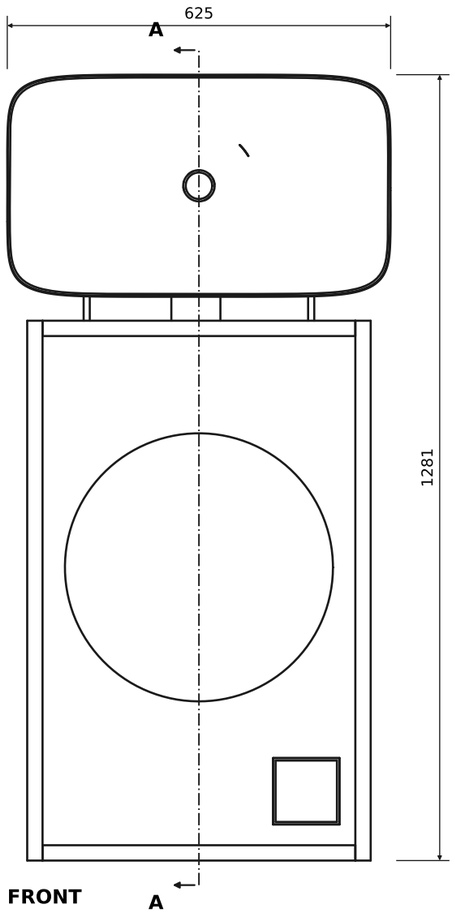

FRONT

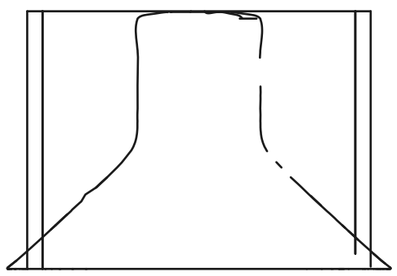

FROM ABOVE


General arrangement

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:10. Section A-A (sheet 1): the product cut at x 280.0 and seen from the right; cut faces hatched, a different angle for each part.

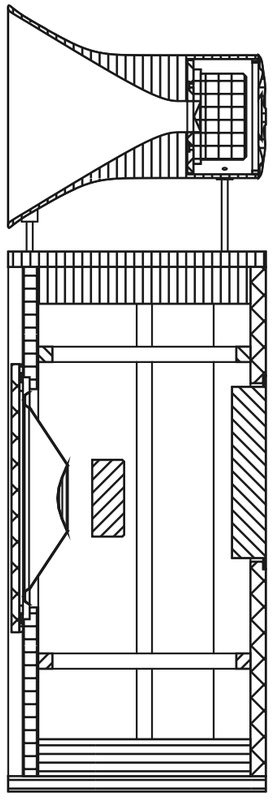


Section A-A

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:10, parts drawn apart. Balloons are the parts list's numbers (last sheet).

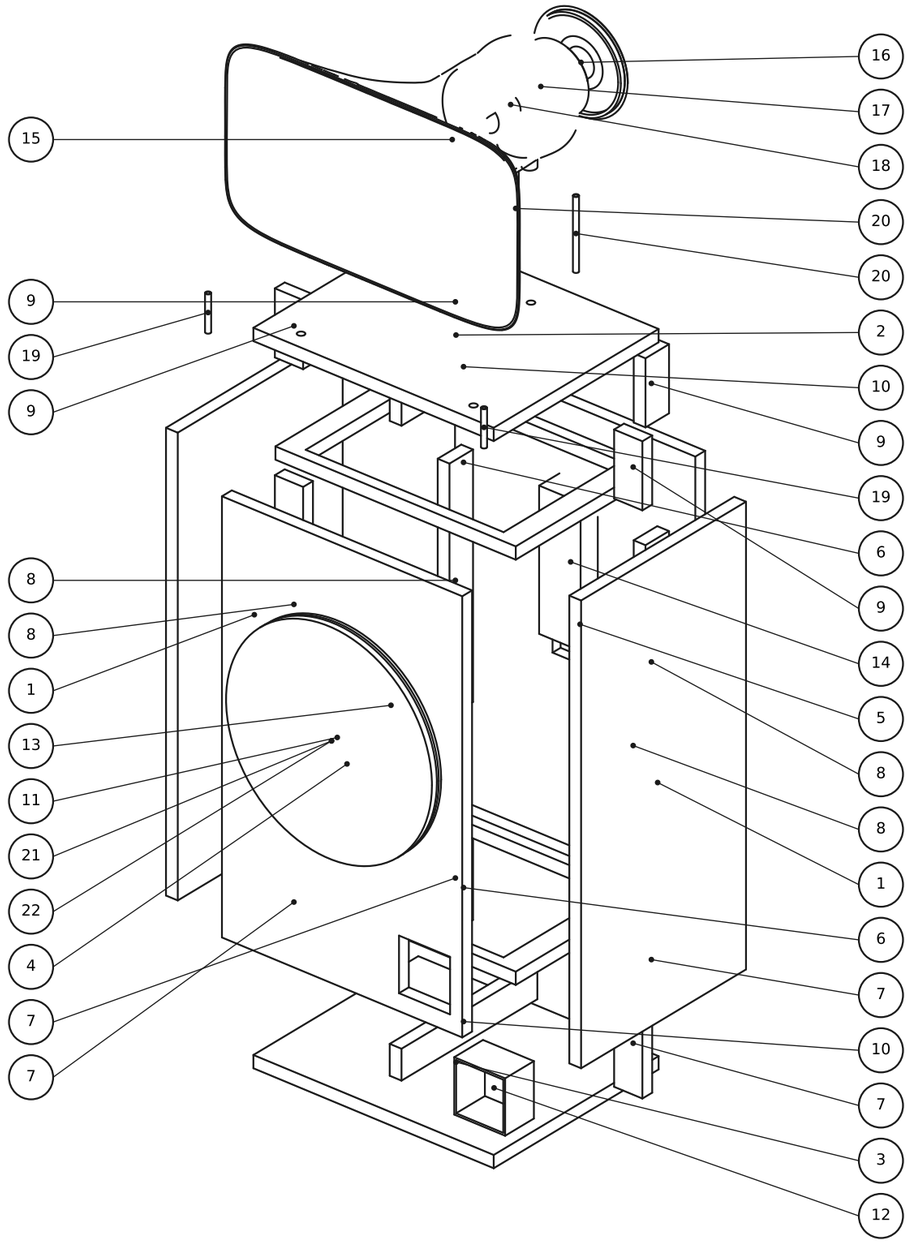


Exploded view

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:20. Panels cut to their outline only (DXF files in dxf/); sizes as seen from the outer face.




left, right

25 mm recycled-hdpe, 4 for the set




bottom

25 mm recycled-hdpe, 2 for the set



rib-left-1, rib-right-1, rib-back-1-1, rib-back-2-1

25 mm recycled-hdpe, 8 for the set




rib-left-2, rib-right-2, rib-back-1-2, rib-back-2-2

25 mm recycled-hdpe, 8 for the set



rib-left-3, rib-right-3, rib-back-1-3, rib-back-2-3

25 mm recycled-hdpe, 8 for the set



rib-top, rib-bottom

25 mm recycled-hdpe, 4 for the set


Sheet parts: plain panels

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/top.dxf. Marks listed at the right.

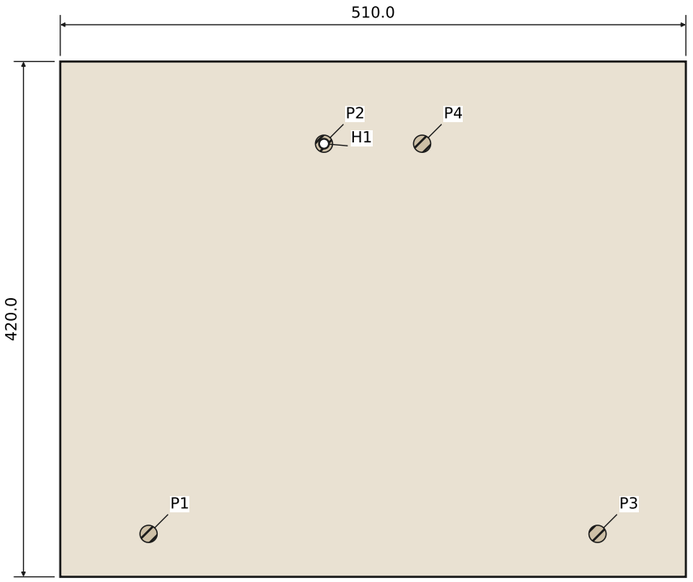

top: 25 mm recycled-hdpe, 2 for the set, seen from its outer face

mark	size	x	y	depth
P1	Ø14.0	72.0	35.0	15 from face
P2	Ø14.0	215.0	353.0	15 from face
P3	Ø14.0	438.0	35.0	15 from face
P4	Ø14.0	295.0	353.0	15 from face
H1	Ø8.0	215.0	353.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: top

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/front-panel.dxf. Marks listed at the right.

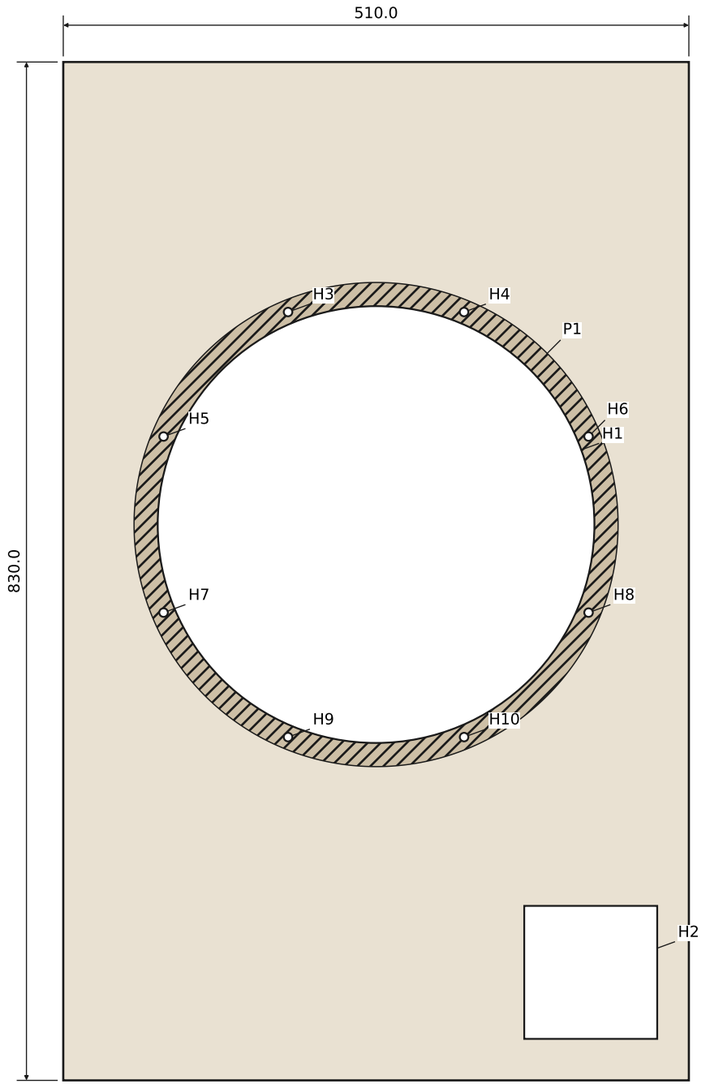

front-panel: 25 mm recycled-hdpe, 2 for the set, seen from its outer face

mark	size	x	y	depth
P1	Ø394.6	255.0	453.0	11 from face
H1	Ø356.0	255.0	453.0	through
H2	108.4 x 108.4	430.0	88.0	through
H3	Ø7.0	183.2	626.2	through
H4	Ø7.0	326.8	626.2	through
H5	Ø7.0	81.8	524.8	through
H6	Ø7.0	428.2	524.8	through
H7	Ø7.0	81.8	381.2	through
H8	Ø7.0	428.2	381.2	through
H9	Ø7.0	183.2	279.8	through
H10	Ø7.0	326.8	279.8	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: front-panel

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/back.dxf. Marks listed at the right.

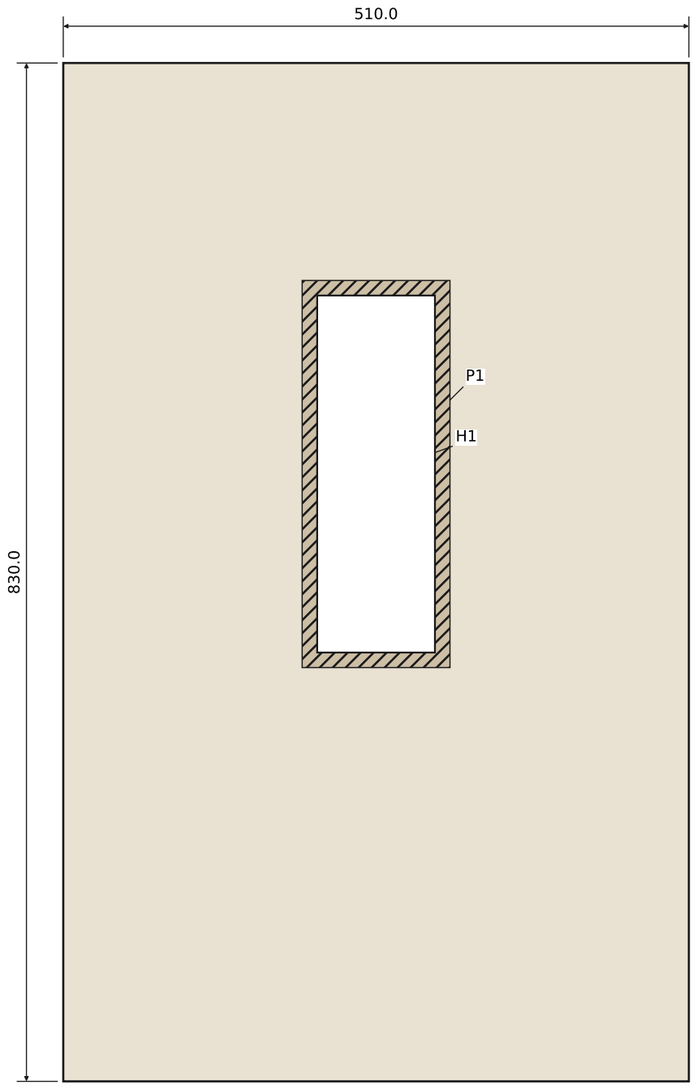

back: 25 mm recycled-hdpe, 2 for the set, seen from its outer face

mark	size	x	y	depth
P1	120.5 x 315.5	255.0	495.0	4.5 from face
H1	96.0 x 291.0	255.0	495.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: back

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood


mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/brace.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	420.0 x 300.0	255.0	173.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

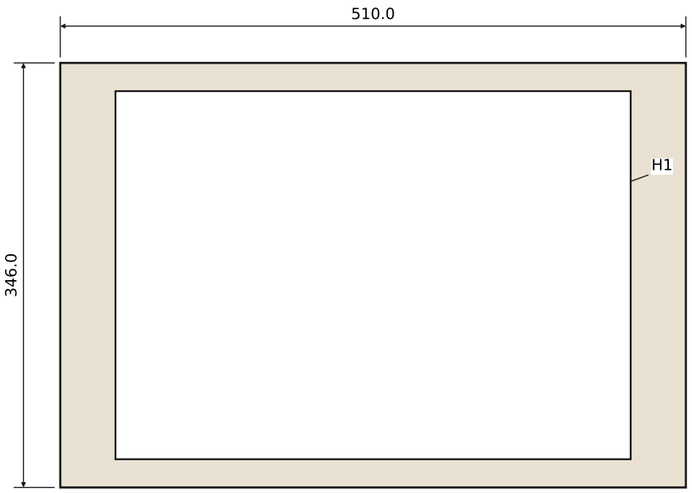

brace: 25 mm recycled-hdpe, 2 for the set, seen from its outer face

Sheet part: brace

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood


mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/brace-2.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	420.0 x 300.0	255.0	173.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

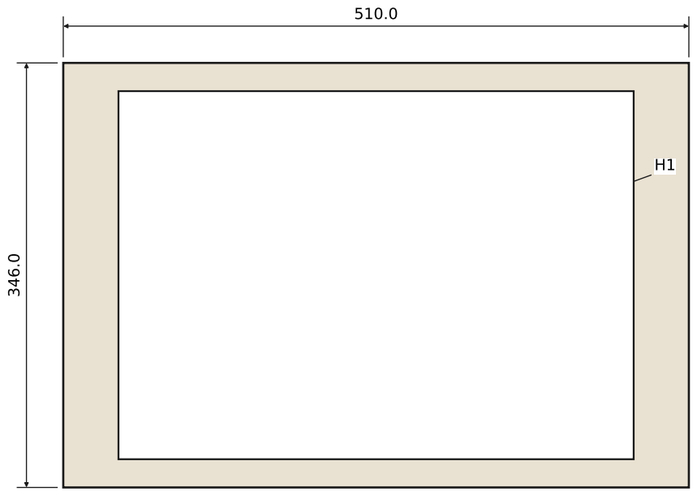

brace-2: 25 mm recycled-hdpe, 2 for the set, seen from its outer face


Sheet part: brace-2

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/woofer-ring.dxf. Marks listed at the right.

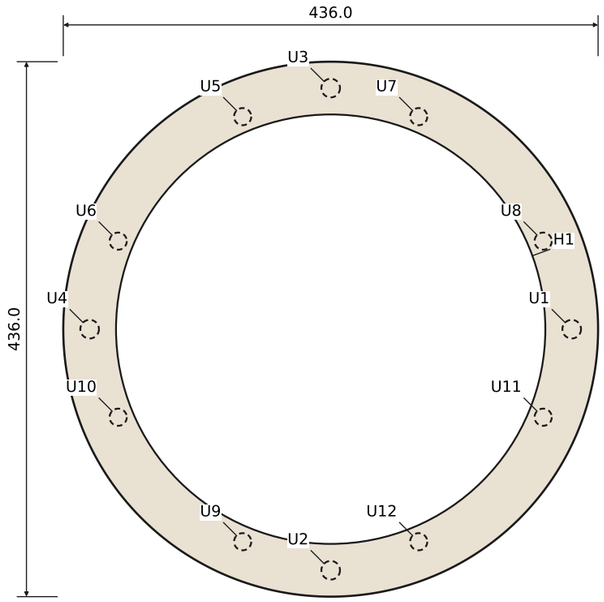

woofer-ring: 6 mm recycled-hdpe, 2 for the set, seen from its outer face

inner-face pockets: dxf/woofer-ring-underside.dxf (seen from that face)

mark	size	x	y	depth
H1	Ø350.0	218.0	218.0	through
U1	Ø15.2	414.5	218.0	3.2 from inside
U2	Ø15.2	218.0	21.5	3.2 from inside
U3	Ø15.2	218.0	414.5	3.2 from inside
U4	Ø15.2	21.5	218.0	3.2 from inside
U5	Ø14.0	146.3	391.2	4 from inside
U6	Ø14.0	44.8	289.8	4 from inside
U7	Ø14.0	289.8	391.2	4 from inside
U8	Ø14.0	391.2	289.8	4 from inside
U9	Ø14.0	146.3	44.8	4 from inside
U10	Ø14.0	44.8	146.2	4 from inside
U11	Ø14.0	391.2	146.2	4 from inside
U12	Ø14.0	289.8	44.8	4 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: woofer-ring

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood


mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/disc-frame.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø350.0	218.0	218.0	through
U1	Ø15.2	414.5	218.0	3.2 from inside
U2	Ø15.2	218.0	21.5	3.2 from inside
U3	Ø15.2	218.0	414.5	3.2 from inside
U4	Ø15.2	21.5	218.0	3.2 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

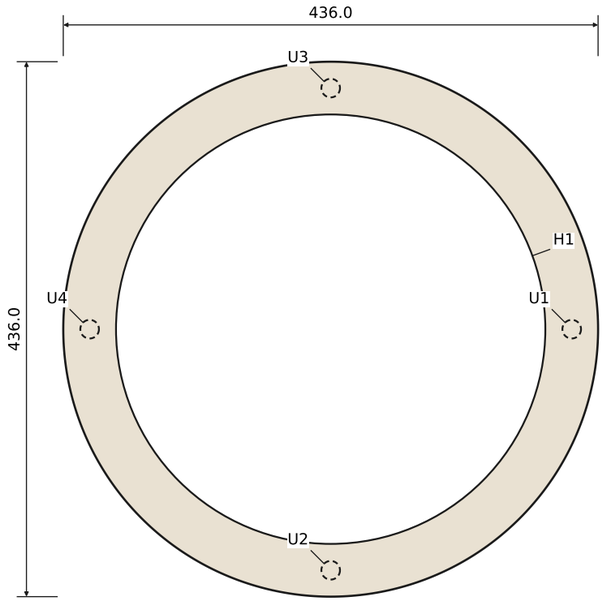

disc-frame: 12 mm recycled-hdpe, 2 for the set, seen from its outer face

inner-face pockets: dxf/disc-frame-underside.dxf (seen from that face)

Sheet part: disc-frame

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood


mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

12. port: asa print, on end; 122 cm3 each; 2 for the set; 1:2


100 square, 73 long from the panel's face: tunes the box to 38 Hz; print 15 longer and trim to tune

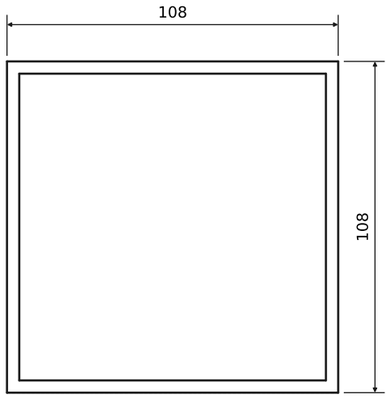

FRONT

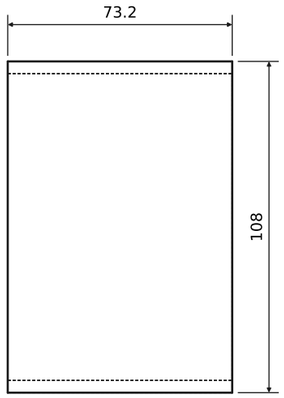


FROM THE RIGHT

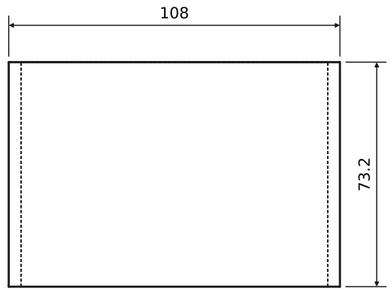


FROM ABOVE

15. waveguide: cast, cast-resin; 5221 cm3 each; 2 for the set; 1:10


mouth 610 x 346, 278 deep, 2 in throat; a 10 rim rounded right round, 625 x 362 outside; a shell 6 thick following its flare; the driver in a pod 200 across behind, closed by a cap; four pads under it take the posts' brass inserts; cast in tinted clear resin in a two-part silicone mould from a CNC-cut plug, its faces polished satin (a slow deep-pour resin: the neck round the throat is solid, 5.2 L in all), or pigmented the same way for the opaque and marbled finishes

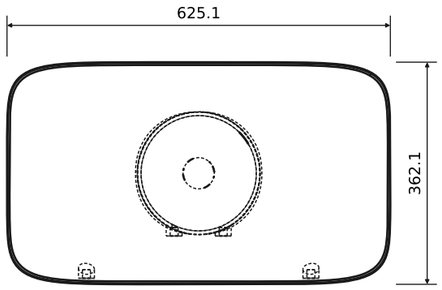

FRONT



FROM THE RIGHT

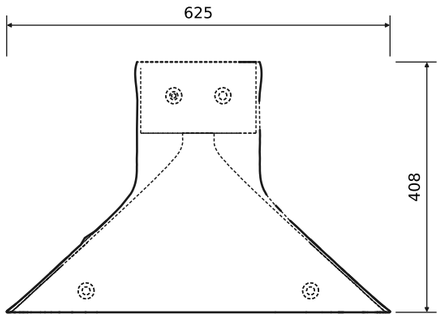

FROM ABOVE

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood


mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

16. waveguide-cap: cast, cast-resin; 187 cm3 each; 2 for the set; 1:5


closes the pod behind the driver; a spigot locates it, three M4 screws hold it; the cable leaves through a post below

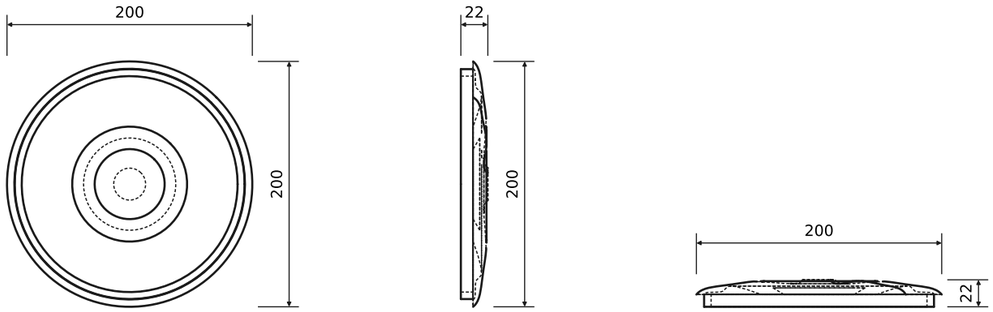

FRONT **FROM THE RIGHT** **FROM ABOVE**

18. hf-adaptor: lathe, aluminium; 242 cm3 each; 2 for the set; 1:5

184 across, 10 thick, bored 50.8 (the throat); 4 countersunk M6 on 101.6 take the driver from the front; 4 x 5.5 on 170 (at 45 degrees to them) take M5 socket caps into the brass inserts in the horn's boss; black anodised

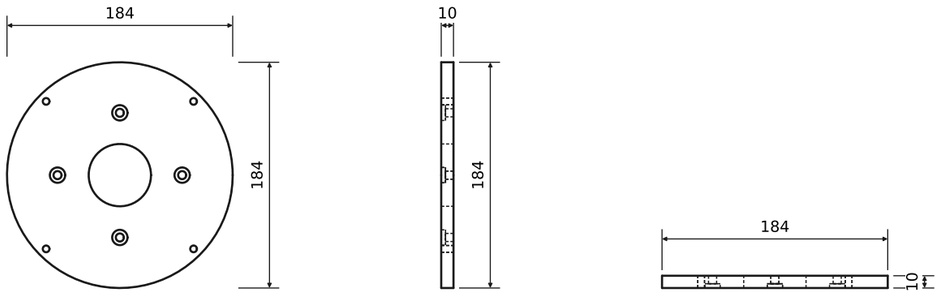

FRONT **FROM THE RIGHT** **FROM ABOVE**

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood


mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

19. post-1, post-2: lathe, stainless; 3 cm3 each; 4 for the set; 1:2


74 long (49 showing): stainless tube 10 x 7, threaded M10 x 1 12 at the top and 13 at the foot, each end into a brass insert

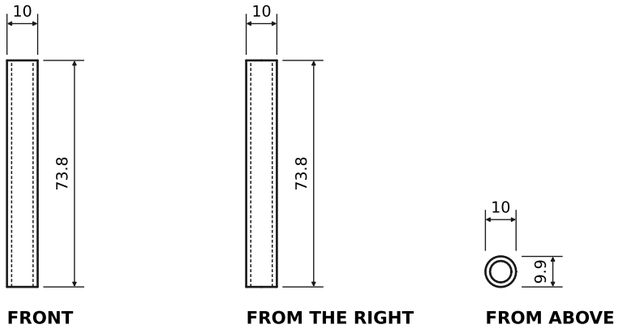

FRONT **FROM THE RIGHT** **FROM ABOVE**

20. post-3, post-4: lathe, stainless; 6 cm3 each; 4 for the set; 1:5

143 long (118 showing): stainless tube 10 x 7, threaded M10 x 1 12 at the top and 13 at the foot, each end into a brass insert; the HF cable runs down inside it

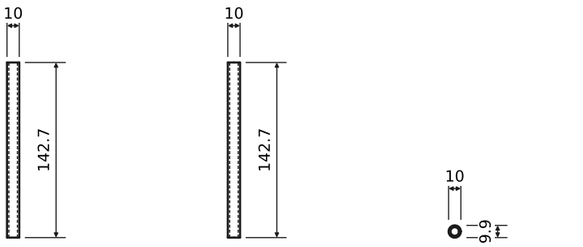

FRONT **FROM THE RIGHT** **FROM ABOVE**

Printed and machined parts

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 2; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	left, right	cut	4	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	420 x 880	[PRICE]
2	top	cut	2	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	510 x 420	[PRICE]
3	bottom	cut	2	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	510 x 420	[PRICE]
4	front-panel	cut	2	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	510 x 830	[PRICE]
5	back	cut	2	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	510 x 830	[PRICE]
6	brace, brace-2	cut	4	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	510 x 346	[PRICE]
7	rib-left-1, rib-right-1, rib-back-1-1, rib-back-2-1	cut	8	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	60 x 175	[PRICE]
8	rib-left-2, rib-right-2, rib-back-1-2, rib-back-2-2	cut	8	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	60 x 475	[PRICE]
9	rib-left-3, rib-right-3, rib-back-1-3, rib-back-2-3	cut	8	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	60 x 130	[PRICE]
10	rib-top, rib-bottom	cut	4	25 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	346 x 60	[PRICE]
11	woofer-ring	cut	2	6 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	436 x 436	[PRICE]
12	port	print	2	ASA, FDM (outdoor, paintable)	122 cm3	16.53
13	woofer	buy	2	FaitalPRO 15PR400-8 15 in woofer (treated paper cone, neodymium, 8 ohm)	393 frame, 356 cut-out, 165 deep	194.00
14	amp-plate	buy	2	Hypex FusionAmp FA122 DSP plate amplifier, 2 x 125 W into 4 ohm	315 x 120 x 55 plate, 291 x 96 recess	422.40
15	waveguide	cast	2	Casting resin (polyurethane or epoxy), tinted clear, translucent or pigmented	5221 cm3, 635 x 418 x 372	684.74
16	waveguide-cap	cast	2	Casting resin (polyurethane or epoxy), tinted clear, translucent or pigmented	187 cm3, 210 x 32 x 210	138.21
17	hf	buy	2	B&C Speakers DE1085TN 2 in compression driver, titanium diaphragm, 100 mm voice coil, neodymium, 16 ohm (round 5: the owner's bigger throat)	154 across, 86 deep, 4 x M6 on 102	512.00
18	hf-adaptor	lathe	2	Aluminium 6061	194 x 20 x 194	43.82
19	post-1, post-2	lathe	4	Stainless steel 304	20 x 20 x 84	16.01
20	post-3, post-4	lathe	4	Stainless steel 304	20 x 20 x 153	16.83
21	disc-frame	cut	2	12 mm Recycled HDPE sheet, pressed to order (a sheet press workspace)	436 x 436	[PRICE]
22	cloth-disc	buy	2	Acoustically transparent speaker cloth (a knit sold for grilles), about 0.6 x 0.95 m a grille, in the finish's colour		[PRICE]
23	cloth-disc-magnets	buy	2	Grille magnets: eight 15 x 3 neodymium discs (N42), four attracting pairs, a set		[PRICE]

11 more lines: bom.md

Notes

1. The waveguide stands on four posts, stainless lamp tube 10 x 7 threaded M10 x 1 at both ends, screwed into brass inserts bonded in pads cast under it and into inserts in the top; the HF cable runs down inside a rear post.
2. The FA122 crosses at about 800 Hz (LR4: B&C asks 12 dB/oct or steeper there) with the HF channel about 9 dB down (108 dB at 2.83 V against the woofer's 99), part of it in the passive L-pad after the amplifier, so its hiss stays inaudible.
3. Hypex advises a sealed box round the amplifier module (left out here, as in the kit's example).
4. No wood: every panel is recycled HDPE sheet, 25 mm, pressed to order from colour-sorted flakes laid out in the bark's pattern (approve a 200 mm pressed sample and a full-sheet trial from one batch first). The ring (6 mm) and the cloth disc's frame (12 mm) are HDPE too.
5. Assembly: the shell's corners hot-plate butt welded, the bead planed flush; the front panel (set back 24 mm), the back, the two braces and the ribs extrusion welded inside, so the box is airtight. No screws, no glue.
6. The woofer flush in its rebate on a gasket, on eight M6 threaded inserts for plastics; the ring over its frame; the port pushed in dry, trimmed to tune (impedance minimum at fb), then sealed with a bead of MS polymer.

Parts list and notes

barkhorn: Two-way horn loudspeaker after Friendly Pressure, in pressed recycled plastic, no wood

mm | issue 2026-10-12 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15