


Scale 1:5. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

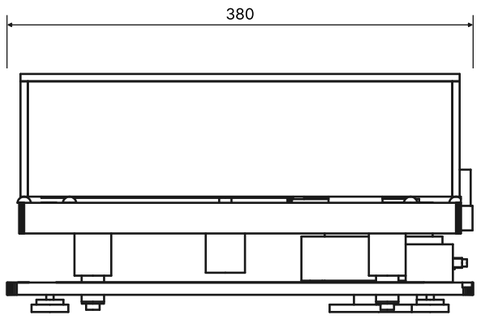

FROM THE RIGHT

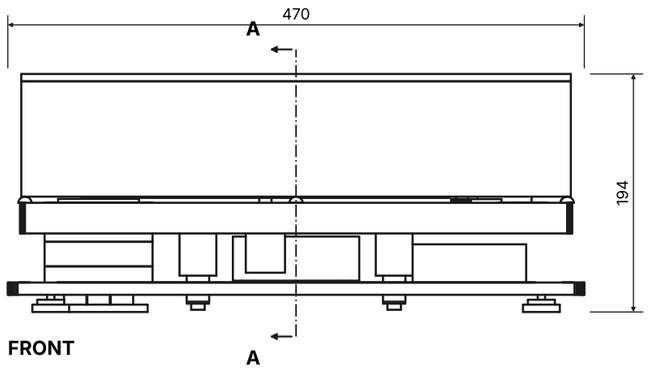

FRONT

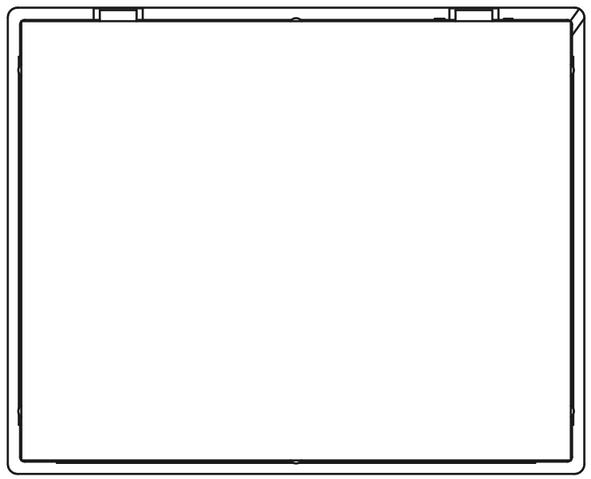

FROM ABOVE


General arrangement

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. Section A-A (sheet 1): the product cut at x 235.0 and seen from the right; cut faces hatched, a different angle for each part.

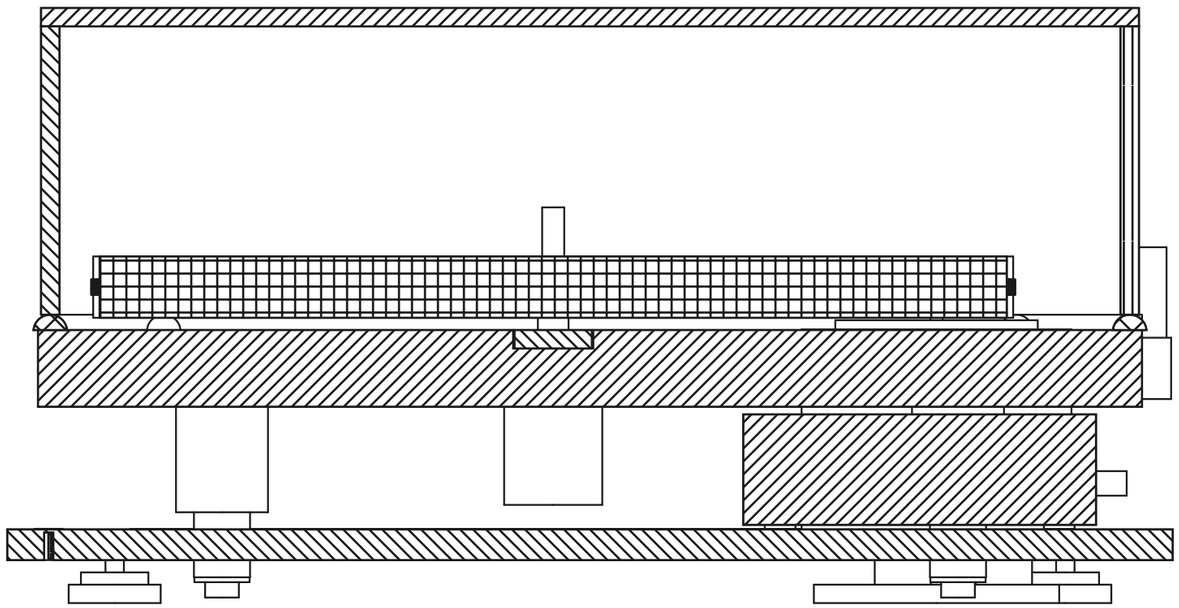


Section A-A

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5, parts drawn apart. Balloons are the parts list's numbers (last sheet).

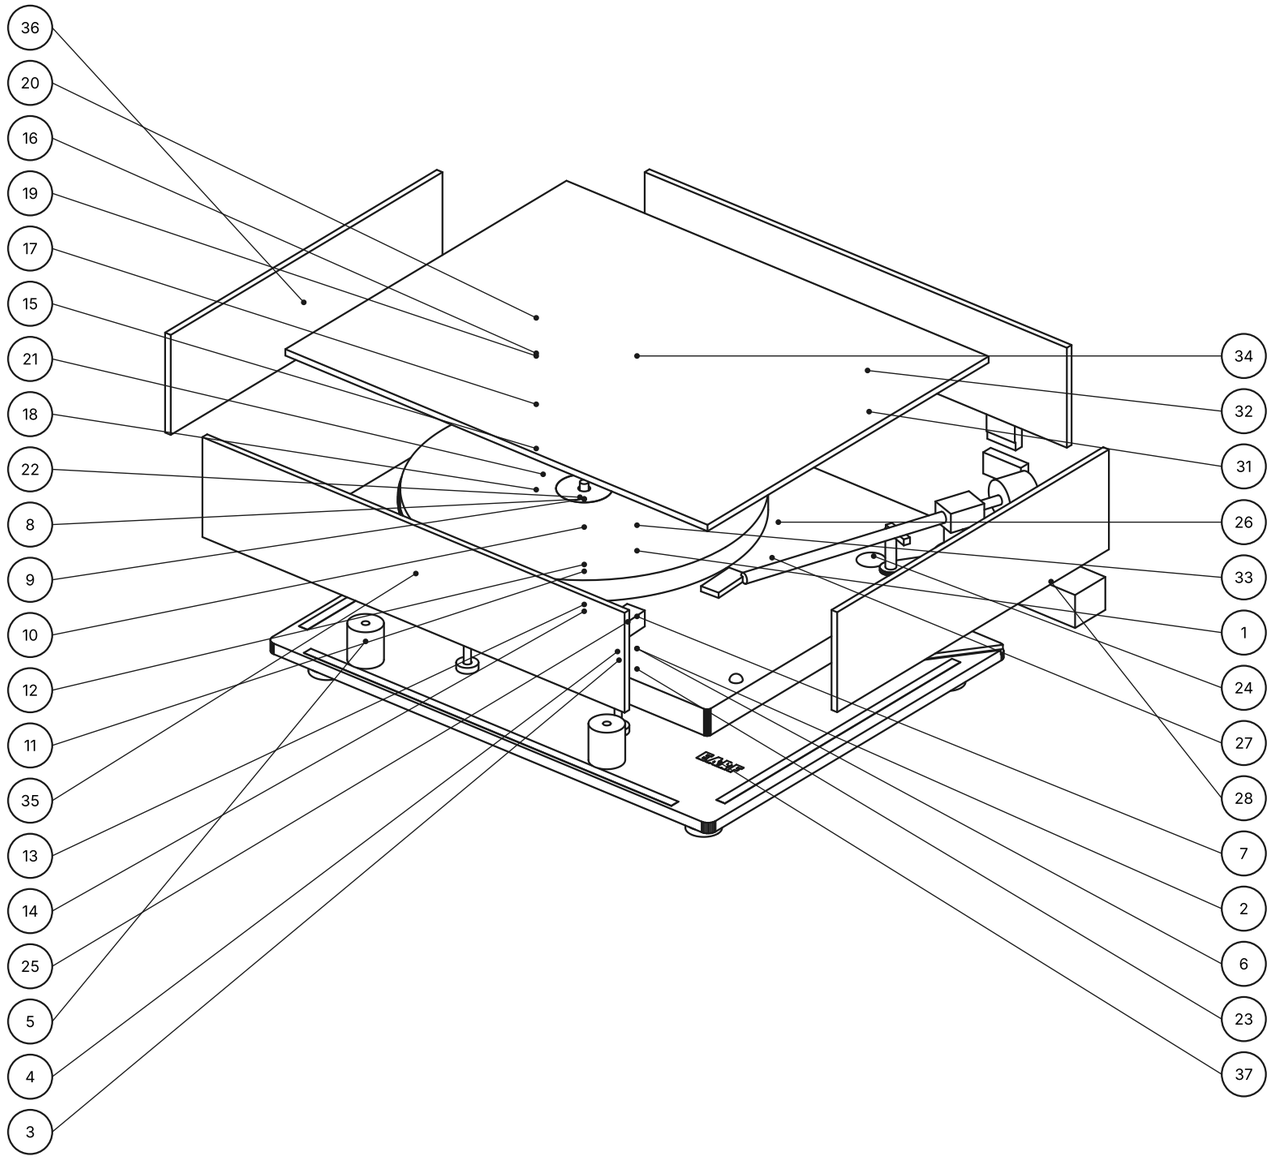


Exploded view

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. Panels cut to their outline only (DXF files in dxf/); sizes as seen from the outer face.




hinge-blocks

20 mm cast-acrylic, 1 for the set

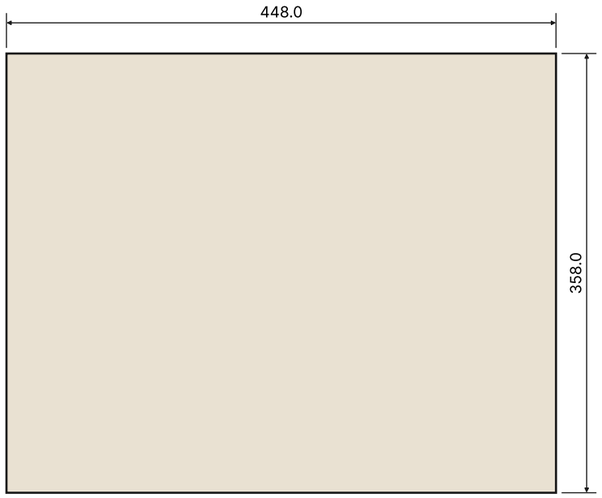


lid-top

6 mm cast-acrylic, 1 for the set

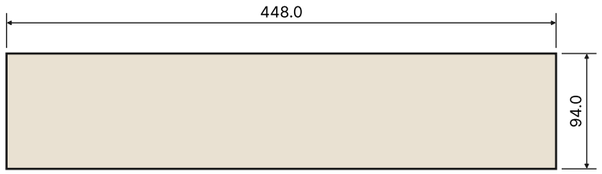

lid-front, lid-back

6 mm cast-acrylic, 2 for the set

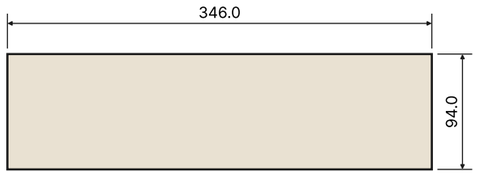

lid-left, lid-right

6 mm cast-acrylic, 2 for the set


Sheet parts: plain panels

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth.dxf. Marks listed at the right.

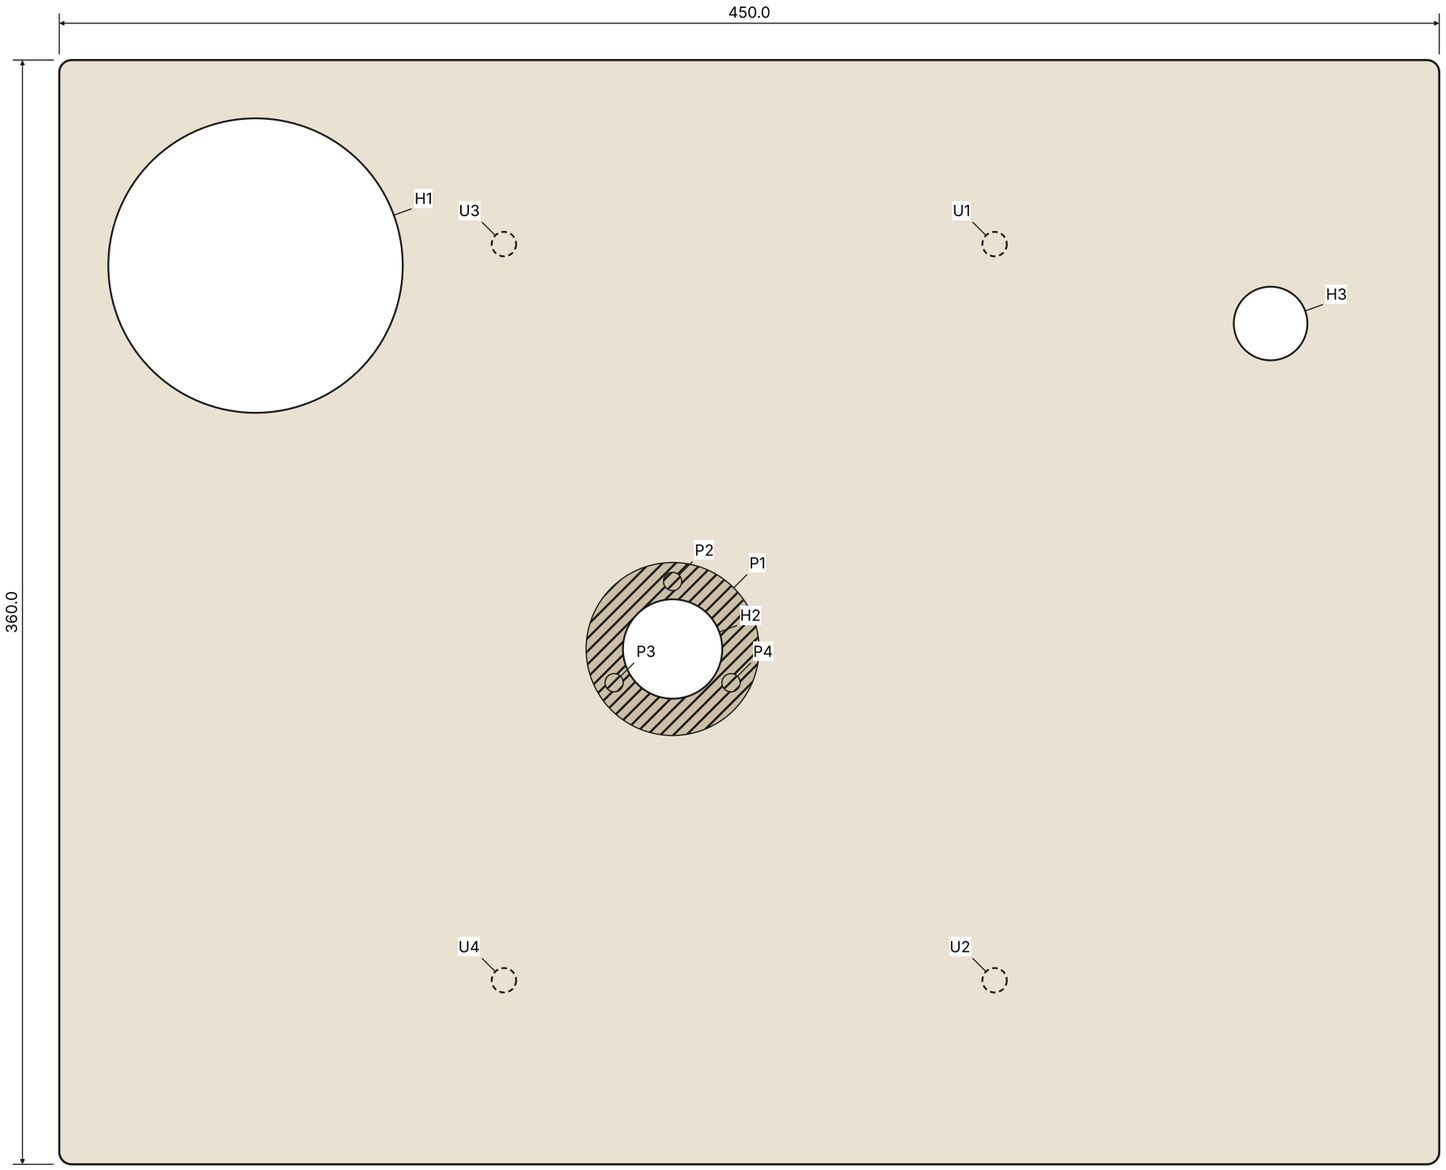

mark	size	x	y	depth
P1	Ø56.4	200.0	168.0	6 from face
P2	Ø6.0	200.0	190.0	16 from face
P3	Ø6.0	180.9	157.0	16 from face
P4	Ø6.0	219.1	157.0	16 from face
H1	Ø96.0	64.0	293.0	through
H2	Ø32.4	200.0	168.0	through
H3	Ø24.0	395.0	274.1	through
U1	Ø8.0	305.0	300.0	12 from inside
U2	Ø8.0	305.0	60.0	12 from inside
U3	Ø8.0	145.0	300.0	12 from inside
U4	Ø8.0	145.0	60.0	12 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


plinth: 25 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/plinth-underside.dxf (seen from that face)

Sheet part: plinth

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/base.dxf. Marks listed at the right.

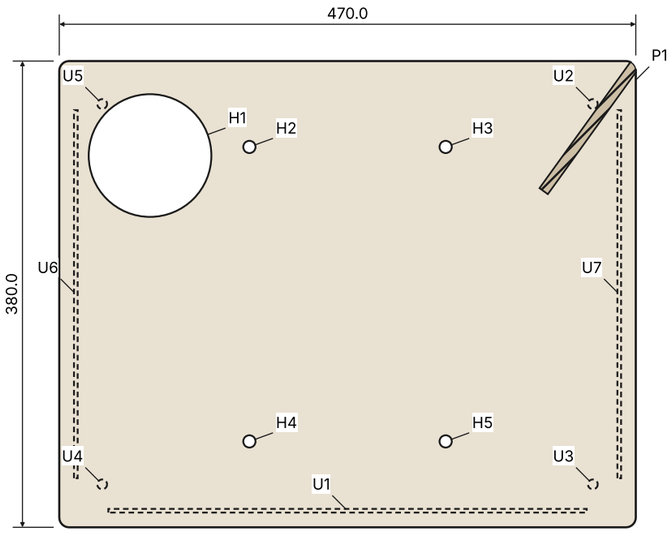

base: 10 mm cast-acrylic, 1 for the set, seen from its outer face

inner-face pockets: dxf/base-underside.dxf (seen from that face)

mark	size	x	y	depth
P1	profile (DXF)	430.9	325.4	4 from face
H1	Ø100.0	74.0	303.0	through
H2	Ø10.0	155.0	310.0	through
H3	Ø10.0	315.0	310.0	through
H4	Ø10.0	155.0	70.0	through
H5	Ø10.0	315.0	70.0	through
U1	390.0 x 3.0	235.0	13.5	9 from inside
U2	Ø8.0	435.0	345.0	7 from inside
U3	Ø8.0	435.0	35.0	7 from inside
U4	Ø8.0	35.0	35.0	7 from inside
U5	Ø8.0	35.0	345.0	7 from inside
U6	3.0 x 300.0	13.5	190.0	9 from inside
U7	3.0 x 300.0	456.5	190.0	9 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: base

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-ring-1.dxf. Marks listed at the right.

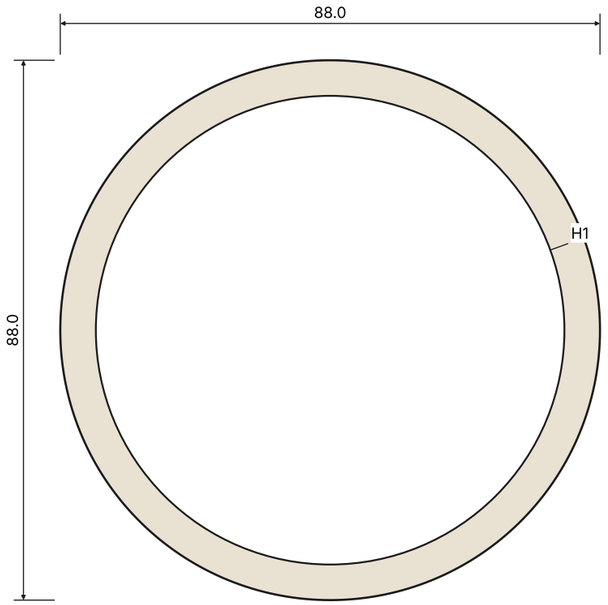

pod-ring-1: 20 mm cast-acrylic, 1 for the set, seen from its outer face

mark	size	x	y	depth
H1	Ø76.4	44.0	44.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: pod-ring-1

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-ring-2.dxf. Marks listed at the right.

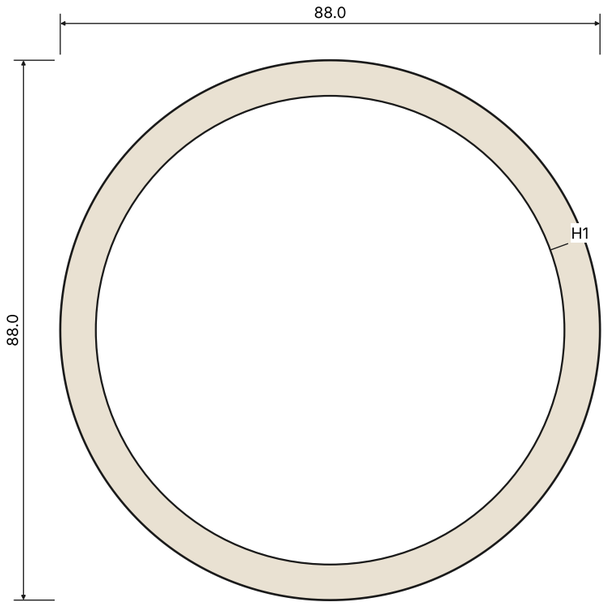

pod-ring-2: 20 mm cast-acrylic, 1 for the set, seen from its outer face

mark	size	x	y	depth
H1	Ø76.4	44.0	44.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: pod-ring-2

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-ring-3.dxf. Marks listed at the right.

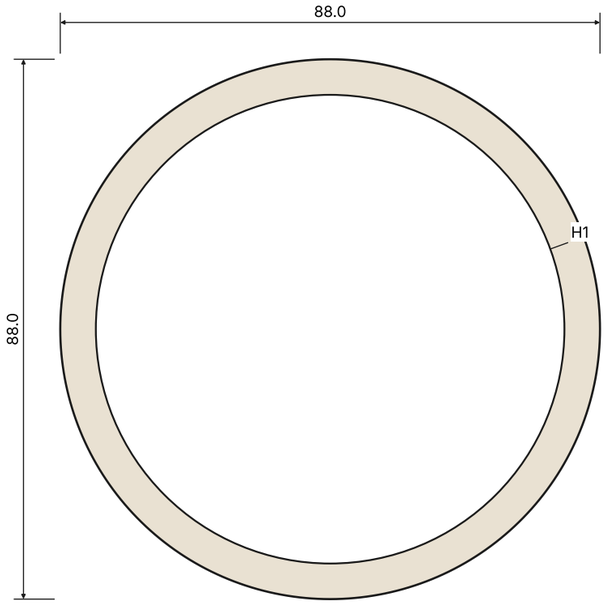

pod-ring-3: 20 mm cast-acrylic, 1 for the set, seen from its outer face

mark	size	x	y	depth
H1	Ø76.4	44.0	44.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.


Sheet part: pod-ring-3

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-ring-4.dxf. Marks listed at the right.

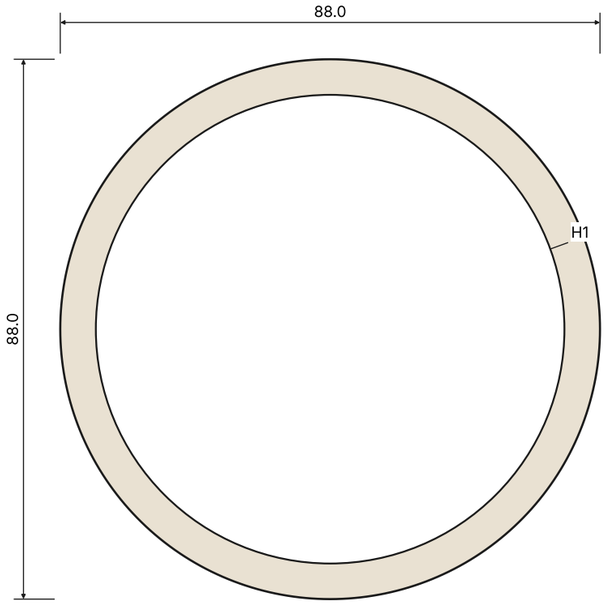

pod-ring-4: 12 mm cast-acrylic, 1 for the set, seen from its outer face

mark	size	x	y	depth
H1	Ø76.4	44.0	44.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: pod-ring-4

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/pod-mat.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	Ø19.0	21.0	51.0	2 from inside
U2	Ø19.0	59.1	51.0	2 from inside
U3	Ø19.0	40.0	18.0	2 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

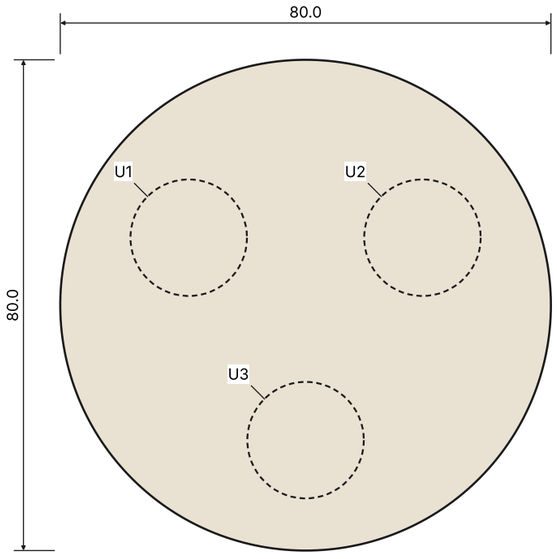

pod-mat: 6 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/pod-mat-underside.dxf (seen from that face)

Sheet part: pod-mat


Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

5. post-1, post-2, post-3, post-4: lathe, cast-acrylic; 23 cm3 each; 4 for the set; 1:1


water-clear cast acrylic rod 30, bored 6.6, faced and polished; cemented under the plinth on a jig



FRONT




FROM THE RIGHT




FROM ABOVE

8. platter: lathe, cast-acrylic; 1380 cm3 each; 1 for the set; 1:10


turned, not routed: from a 310 blank of 25 mm cast sheet in the colour, rough-turned to 302 × 22, annealed (80 C, 8 h, cooled slowly), both faces faced to 20.0, the rim finish-turned to 300 and polished, crowned 0.2 for the belt; face flatness and axial and radial run-out 0.05 or less on the finished disc; then the hub bonded in, bored true to the platter on the lathe, the whole balanced (under 2 g mm); no mat; the prototype: the 310 blank laminated from two 1/2 in sheets as the plinth, annealed before turning



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

9. platter-hub: lathe, brass-leadfree; 32 cm3 each; 1 for the set; 1:1


bonded into the platter with a structural acrylic adhesive; bored after, true to the spindle



FRONT




FROM THE RIGHT




FROM ABOVE

10. spindle: lathe, stainless; 6 cm3 each; 1 for the set; 1:2

440C or hardened 416, ground to 10 h5; the record spindle 7.2; a 6 cup at its foot for the ball; pressed and bonded into the hub



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

11. bearing-housing: lathe, brass-leadfree; 47 cm3 each; 1 for the set; 1:1


lead-free brass (C69300 or C27450); the bushes pressed in and honed in line to the spindle (3-5 um clearance); filled with 2 ml of oil; hangs 8 over the base; an M3 earth tag on its flange, wired to the arm's earth lead, so static bleeds off the matless acrylic through the spindle, the oil film and the housing

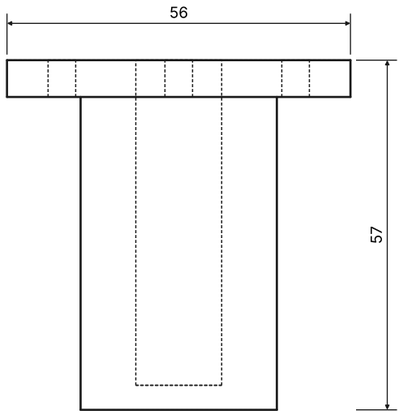

FRONT

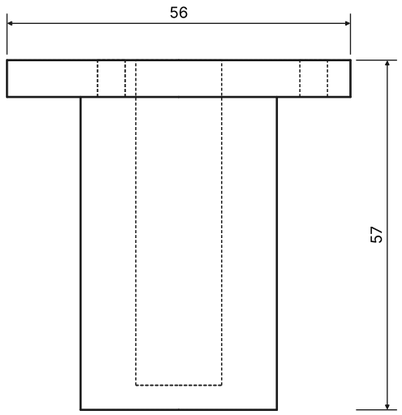


FROM THE RIGHT

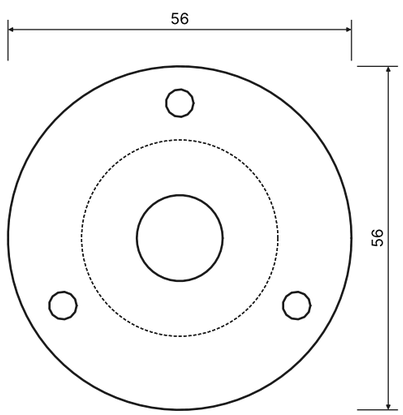


FROM ABOVE

17. pod-core: lathe, brass-leadfree; 226 cm3 each; 1 for the set; 1:2


lead-free brass (C69300 or C27450), 76 × 72, the motor's bore 54 × 42 from the top, three 19 × 2 pockets under it for the pad stacks, a 10 hole for the motor's lead: 1.9 kg, the pod 2.4 kg with its rings and the motor



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

20. pulley: lathe, aluminium; 15 cm3 each; 1 for the set; 1:1


its belt face 39.48 at 250 rpm (Neo, 33.3); turned to the motor's measured speed; the Neo trims the rest



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	plinth	cut	1	25 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	450 × 360	96.19
2	base	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	470 × 380	42.42
3	led-strip	buy	1	Ledco LCLS24V-24W-27K-IP22: 24 V, 4.8 W/m, 8 mm, 2700 K, CRI 90+, dimmable, 5 m roll; on a black PCB if Ledco makes it (UNCONFIRMED; black-PCB 24 V strips are common), so the strip reads as a dark line through the polished edge when off		58.00
4	slot-mask	buy	1	any screen printer Opaque black band screen-printed in two coats (UV-curing ink for acrylic) on the base's top over the light's slot: three runs, 9 wide, 0.98 m in all; black cast acrylic strips cemented in a shallow rebate are the alternative		30.00
5	post-1, post-2, post-3, post-4	lathe	4	Cast acrylic tube, tinted through	40 × 40 × 44	17.84
6	bushings	buy	1	Isolate It (Sorbothane Inc.) Sorbothane vibration isolation bushings, 30 duro, 0.28 in ID x 0.72 in OD x 0.22 in thick (7.1 × 18.3 × 5.6), a 12-pack: two at each post (eight), one over and one under the base on the M6 bolt; about 1.8 kg on each		25.00
7	float-bolts	buy	1	Four M6 × 70 stainless socket cap bolts, four 18 mm stainless washers, four M6 nyloc nuts (the float's hold-downs, snug only)		8.00
8	platter	lathe	1	Cast acrylic tube, tinted through	310 × 310 × 25	181.10
9	platter-hub	lathe	1	Brass C69300 (Eco Brass, lead-free) or C27450	56 × 56 × 30	59.11
10	spindle	lathe	1	Stainless steel 304	20 × 20 × 95	126.14
11	bearing-housing	lathe	1	Brass C69300 (Eco Brass, lead-free) or C27450	66 × 66 × 67	88.78
12	bushes	buy	1	any lathe shop Two solid bronze plain bushes (C932 / SAE 660), 10 × 14 × 12, pressed into the housing and honed in line to the ground spindle, 3-5 um diametral clearance		40.00
13	ball	buy	1	Tungsten carbide ball, 6 mm, grade 10: the spindle's thrust point, seated in a cup at the spindle's foot		5.00
14	thrust-plate	buy	1	Thrust plate 13.8 × 3, hardened 52100 steel (60 HRC) lapped flat, at the foot of the housing's bore in the oil bath, under the carbide ball (a sapphire window of the same size is the alternative)		20.00
15	pod-ring-1, pod-ring-2, pod-ring-3	cut	3	20 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	88 × 88	3.68
16	pod-ring-4	cut	1	12 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	88 × 88	2.21
17	pod-core	lathe	1	Brass C69300 (Eco Brass, lead-free) or C27450	86 × 86 × 82	135.97
18	pod-mat	cut	1	6 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 80	0.91
19	motor	buy	1	Rega 24 V low-vibration synchronous motor upgrade kit (motor, its board and mounting), for the Neo PSU		265.00
20	pulley	lathe	1	Aluminium 6061	55 × 55 × 22	46.69
21	pod-pads	buy	1	Isolate It (Sorbothane Inc.) Sorbothane bushings, 30 duro, 7.1 × 18.3 × 5.6 (the float's, from a second 12-pack): three stacks of two under the motor's pod, 2.4 kg on three, 35 kPa a stack (load per the maker's table UNCONFIRMED)		25.00
22	belt	buy	1	Flat turntable belt, ground rubber or polyurethane, 5 wide x 0.6, about 975 long unstretched (1025 round the platter's rim and the 40 pulley, stretched 5 %)		25.00
23	feet	buy	1	any (Essentra, Kipp, Elesa kind) Four levelling feet, M6 × 20 stud, 30 mm base with an anti-slip rubber pad, the stud into M6 brass inserts bonded into the base		24.00

Parts list (1 of 3)

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
24	arm	buy	1	Rega RB330 tonearm (9 in, Rega geometry: 222 mm from the platter's centre to the arm's hole, effective length 236.5, overhang 14.5, offset 21.55 deg), with its own lead and cueing lift		675.00
25	cartridge	buy	1	Ortofon 2M Black moving-magnet cartridge (nude Shibata stylus), black body, 1/2 in mount		750.00
26	phono-stage	buy	1	Pro-Ject Phono Box S2, MM/MC phono stage in an aluminium case, 103 × 115 × 36 (one listing 103 × 36 × 115 mm, 0.57 kg): RIAA within 0.4 dB 20 Hz-20 kHz, MM S/N 94 dBA at 40/43 dB gain, THD under 0.01 %, subsonic filter 20 Hz 12 dB/oct, MM 47k		269.00
27	phono-pads	buy	1	Four 10 mm felt pads under the phono stage		2.00
28	rear-box	buy	1	Hammond 1590A die-cast aluminium box, 92.6 × 38.5 × 31, black: the arm's lead in, a DPDT bypass toggle, two gold RCA line-out jacks, an earth post, a 2.1 mm 24 V jack, the regulator inside		55.00
29	phono-power	buy	1	any (an LT3045 module, Analog Devices' ultra-low-noise LDO) LT3045 linear regulator module set to 18 V from 24 V, 0.8 uV rms noise (10 Hz-100 kHz) per the chip's datasheet, for the phono stage; and a 2.1 mm Y lead splitting the Mean Well		25.00
30	phono-wiring	buy	1	Short shielded interconnects inside the float: the arm's lead to the rear box, the rear box to the phono stage and back; star earth at the rear box's post (arm, bearing, phono stage)		20.00
31	hinge-blocks	cut	1	20 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	40 × 10	0.18
32	hinges	buy	1	Pro-Ject Replacement dust cover hinge for Debut series (rp-611), two: friction hinges that hold the lid open at any angle, a spring blade clamped to the lid's back wall, the foot in a slot (here a pocket in an acrylic block on the plinth's		34.00
33	fixings	buy	1	Brass threaded inserts (4 M6 for the feet, 4 M6 for the posts' bolts, 4 M4 for the hinge blocks, 3 M4 for the bearing's flange), M4 stainless button screws, two clear Heyco-kind cord grips (motor and light), 3M Bumpon SJ5302 clear x 6 under		22.00
34	lid-top	cut	1	6 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	448 × 358	22.85
35	lid-front, lid-back	cut	2	6 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	448 × 94	6.00
36	lid-left, lid-right	cut	2	6 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	346 × 94	4.63
37	mark	buy	1	Laser etching into the cast acrylic, frosted, about 0.1 deep, from a vector file: EARF 44 wide, the etch filled with the colour, deeper		15.00
38	neo-psu	buy	1	Rega Neo PSU MK2: DSP-generated drive for Rega's 24 V motor, 33/45 by a button, fine speed trim (0.01 rpm steps) on the back; US 60 Hz 115-120 V version		445.00
39	led-adapter	buy	1	Mean Well GST25A24-P1J desktop adapter, 24 V DC 1.04 A (25 W), level VI, IEC C8 inlet, 2.1 mm plug; UL/cUL 62368-1 listed, a Class 2 / limited power source (the strip draws 6.8 W)		19.00
40	led-dimmer	buy	1	Waveform Lighting FilmGrade Flicker-Free LED Dimmer, part 3081, 6-60 V DC, 10 A, turn dial, in line on the 24 V lead; PWM at 25 kHz (Waveform's knowledge base; the store page says flicker-free 0-100 %), above anything a phono stage hears		80.00
41	earth-lead	buy	1	An M3 ring tag on the bearing housing's flange and 0.5 mm2 green-yellow wire to the arm's earth lead		3.00
42	bearing-fixings	buy	1	Three M4 brass threaded inserts bonded with epoxy into 6 holes in the pocket's floor, three M4 × 10 black socket button heads: the bearing's flange		5.00

Parts list (2 of 3)

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
43	bearing-oil	buy	1	Turntable bearing oil, 8 ml (a light synthetic oil, ISO VG 32 or as the bush maker says)		15.00
44	cement	buy	1	Evonik (Röhm) ACRIFIX 2R 0190, two-component polymerising cement for cast acrylic (cures through any tint, unlike the one-part light-curing 1R 0192); Weld-On 40 or 42 is the US equivalent		45.00

Parts list (3 of 3)

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Notes

1. The plinth: one 25 mm sheet of tinted cast acrylic (the Clouds' own, in the colour), 450 × 360, corners R4, edges eased and polished, annealed after machining. The base: 10 mm of the same, 470 × 380, R8, its outer edge polished all round.
2. The float: four water-clear posts (30 rod, bored 6.6) cemented under the plinth; each stands on a Sorbothane bushing (30 duro, 18.3 × 7.1 × 5.6) on the base, with a second under the base, a washer and a nyloc nut on an M6 stainless bolt into a brass insert in the plinth. Snug the nuts by hand: the bushings carry about 1.8 kg each.
3. The light: a 24 V, 4.8 W/m strip in three straight runs (front, left, right) standing in a 3 × 9 slot routed up into the base from below, 12 in from the edge, the LEDs facing out. Behind a listed Mean Well 24 V adapter and an in-line flicker-free dimmer (25 kHz PWM, above anything a phono stage hears). 4.7 W at full; the slot is open below, so the strip breathes into the 14 mm under the base. Its leads twisted, out at the back-left, away from the arm's lead at the back-right.
4. The motor stands apart: its pod (a 1.9 kg brass cup in four rings of the colour, 88 across, 2.4 kg with the motor) on three stacks of two Sorbothane bushings in pockets in a 6 mm mat on the shelf, up through a 100 hole in the base and a 96 hole in the plinth, 4 mm clear. Nothing touches the plinth from the motor but the belt.
5. The platter: turned from 25 mm cast sheet in the colour (rough, anneal, face both sides to 20, finish-turn the rim); flatness and run-out 0.05 or less; the brass hub bonded in and bored true, the spindle pressed and bonded into the hub, the whole balanced. The belt on its polished rim. No mat.
6. The bearing: a turned brass housing through the plinth, flanged into a pocket in its top on three M4 screws into bonded inserts; two solid bronze bushes honed in line (3-5 um); a ground stainless spindle on a 6 mm carbide ball on a lapped hardened-steel thrust plate, in the oil bath. Earthed to the arm's earth lead.
7. Cement: ACRIFIX 2R 0190 (two-part, polymerising; cures through any tint) for every cemented joint: the lid, the posts to the plinth, the pod's rings.
8. Speed: Rega's 24 V motor driven by the Neo PSU MK2 (33/45 by a button, 0.01 rpm trim); the pulley turned to the motor's measured speed.
9. Arm: Rega RB330 at Rega's 222 from the spindle, its nut under the 25 mm plinth (counterbored from below if its thread is short: UNCONFIRMED), Rega's spacers for height; an Ortofon 2M Black. Level the platter on the four feet before setting the arm.
10. First-sample checks: a thermocouple on the light's slot wall at full for an hour (under 60 C); a hum test with the phono stage at full gain, the light off and at every setting of the dimmer; a tap test of the float with the stylus on a still record.
11. The lid: 6 mm of the same acrylic, cemented as a box 448 × 358 × 100, on six clear bumpers, on Pro-Ject's two friction hinges in acrylic blocks on the plinth's back edge. Open, it leans back about 12 degrees past upright and needs 100 mm behind the base.
12. The mark: EARF 40 wide laser-etched at the plinth's front right and filled with the colour, deeper.

Notes

Mantle: Belt-drive record player in tinted cast acrylic, floating over a lit base, with its own phono sta

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15