


Scale 1:5. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

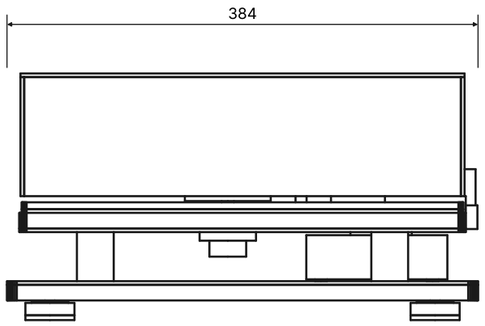

FROM THE RIGHT

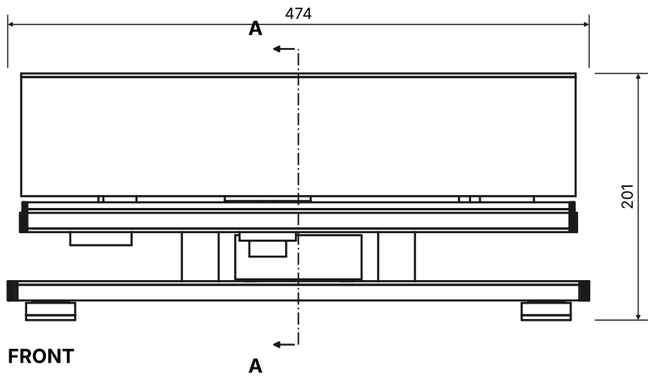

FRONT

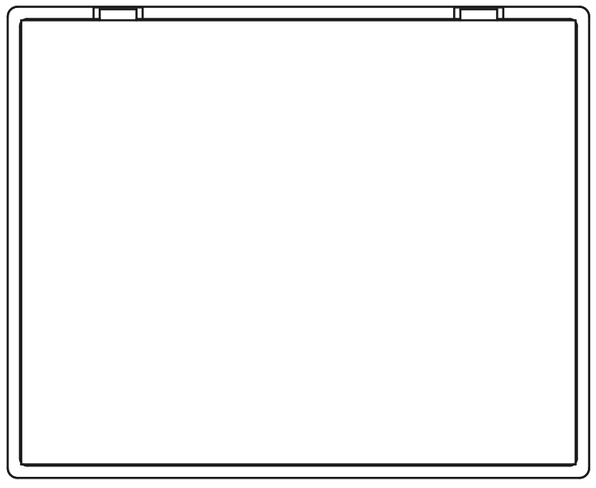

FROM ABOVE


General arrangement

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. Section A-A (sheet 1): the product cut at x 237.0 and seen from the right; cut faces hatched, a different angle for each part.

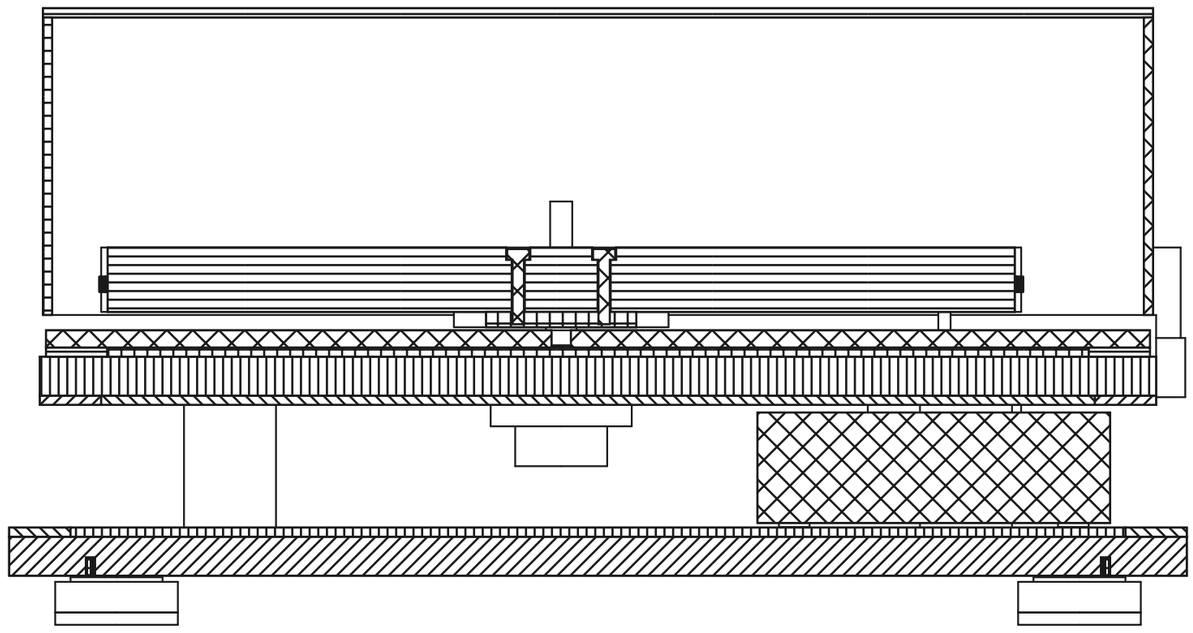


Section A-A

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5, parts drawn apart. Balloons are the parts list's numbers (last sheet).

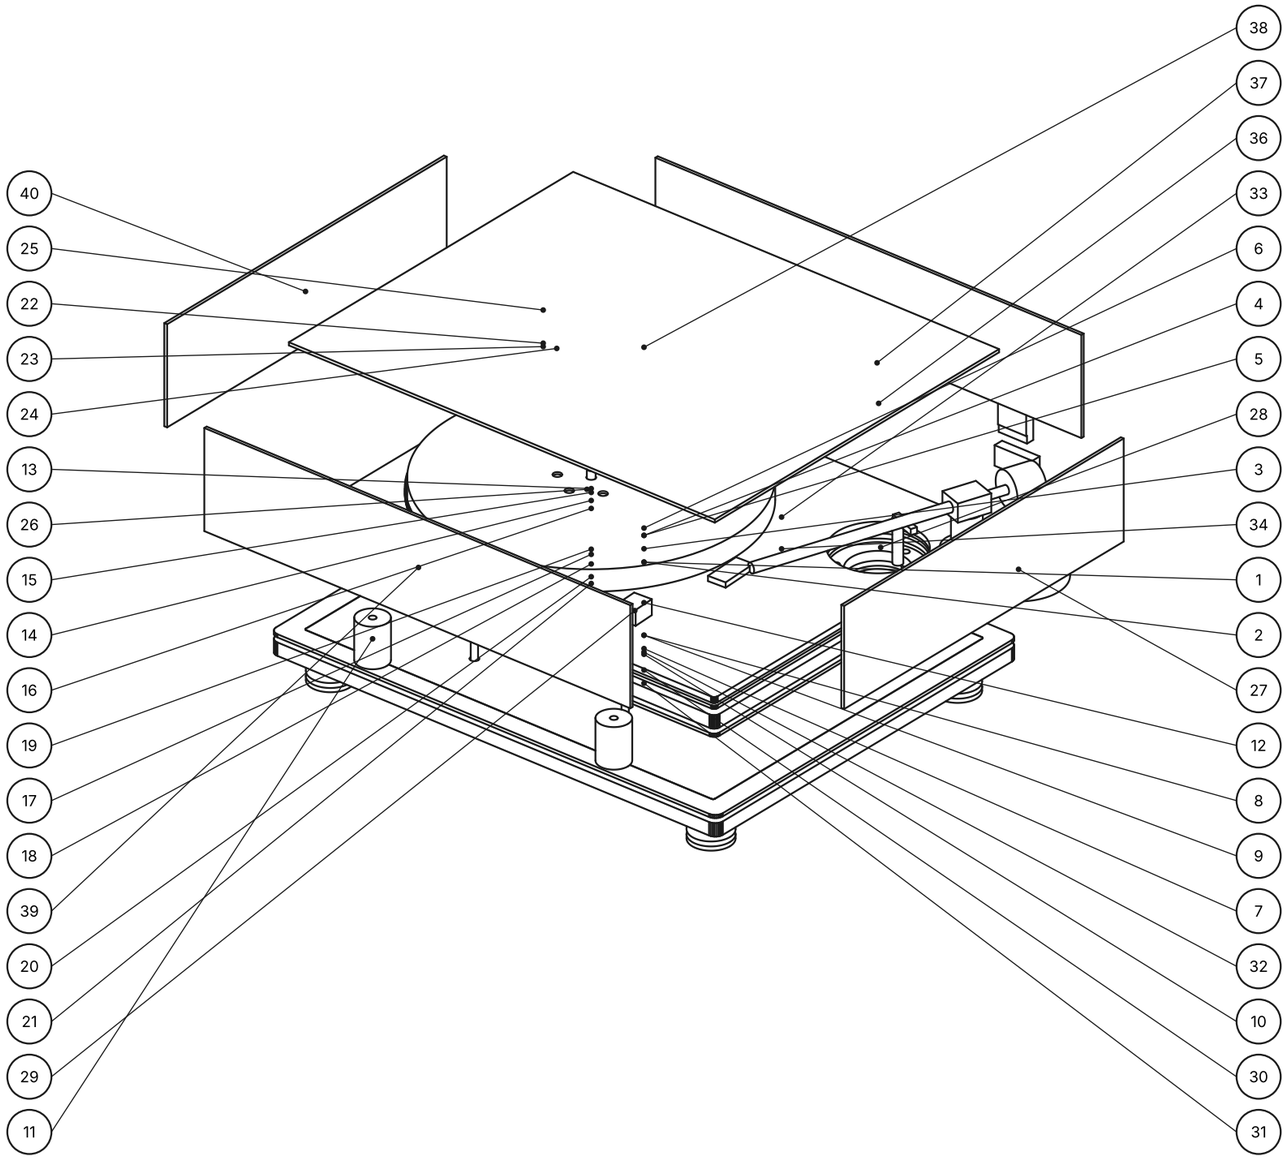


Exploded view

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. Panels cut to their outline only (DXF files in dxf/); sizes as seen from the outer face.

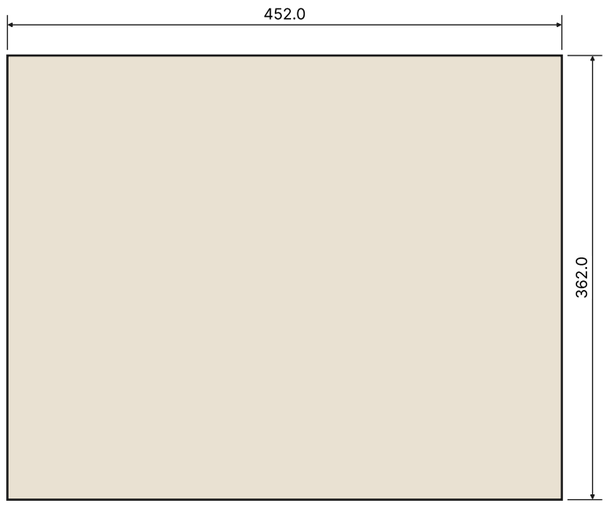


lid-top

3 mm trucast-tint, 1 for the set

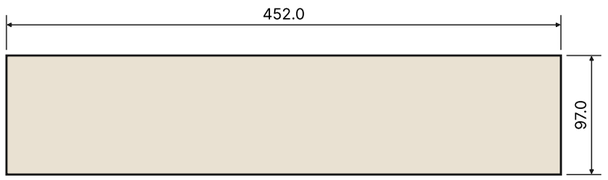

lid-front, lid-back

3 mm trucast-tint, 2 for the set

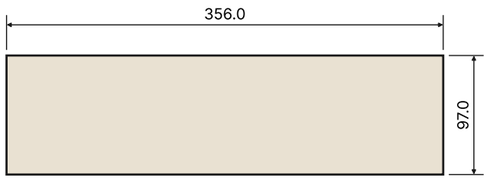

lid-left, lid-right

3 mm trucast-tint, 2 for the set


Sheet parts: plain panels

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L1.dxf. Marks listed at the right.

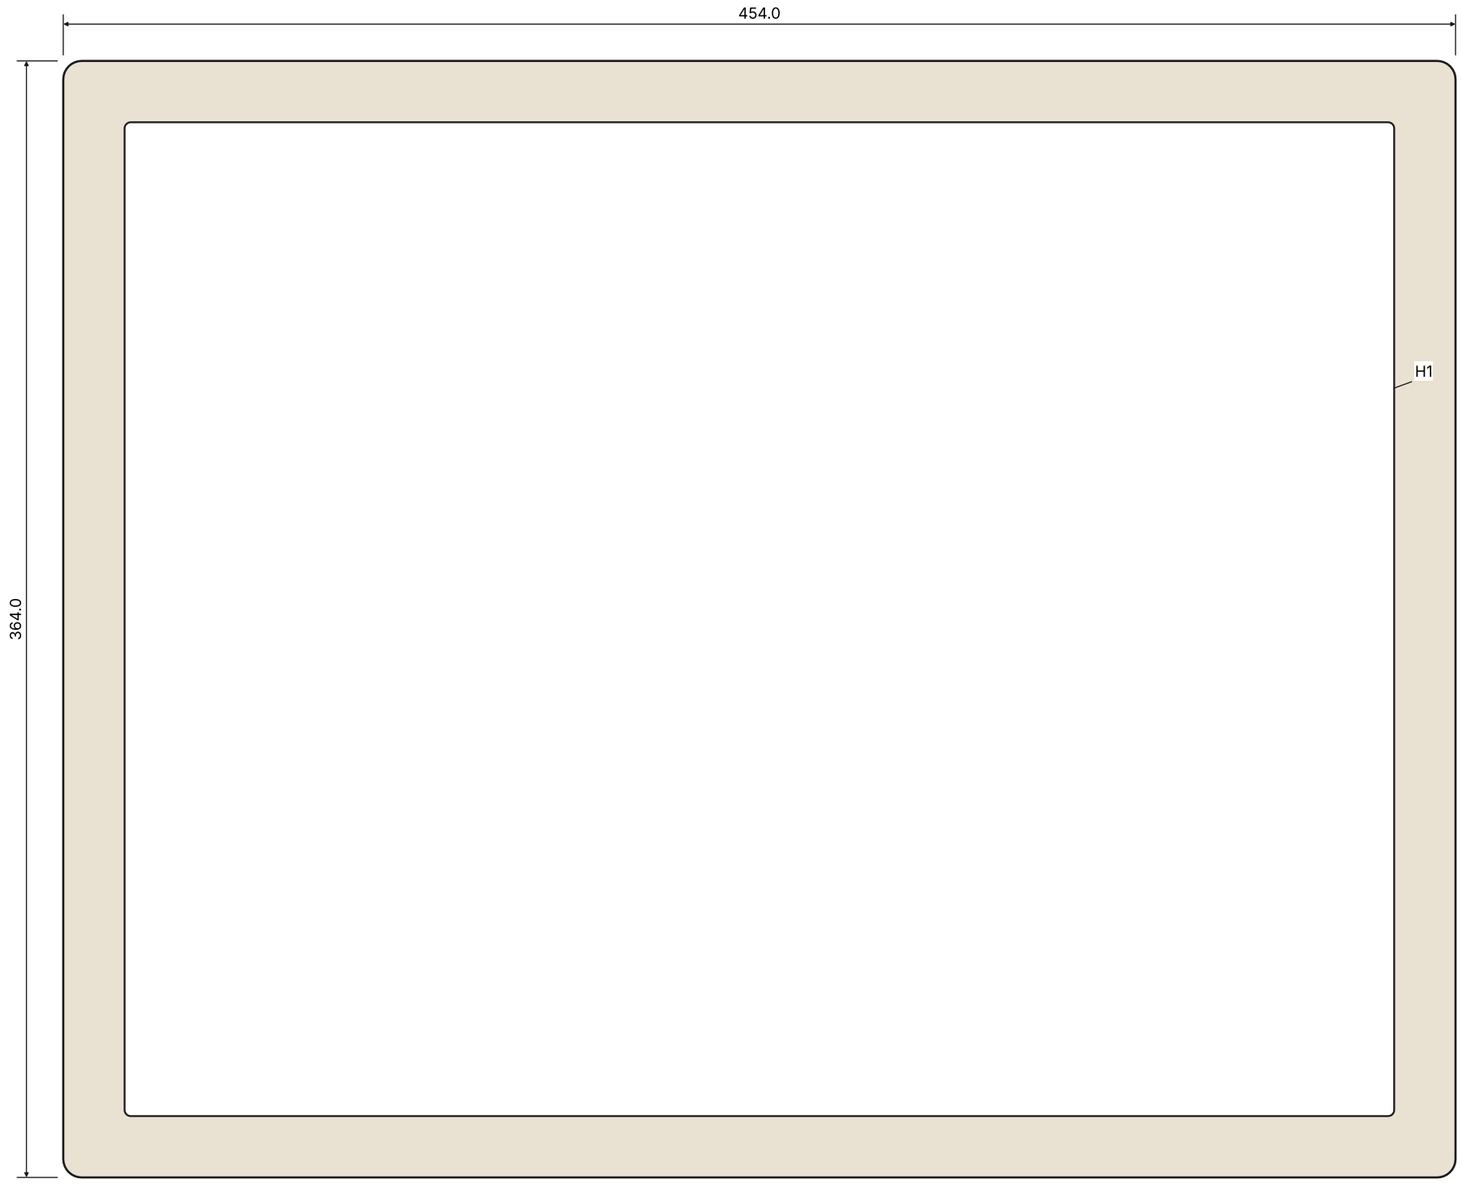

mark	size	x	y	depth
H1	profile (DXF)	227.0	182.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

plinth-L1: 3 mm trucast-tint, 1 for the set, seen from its outer face


Sheet part: plinth-L1

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L1-inlay.dxf. Marks listed at the right.

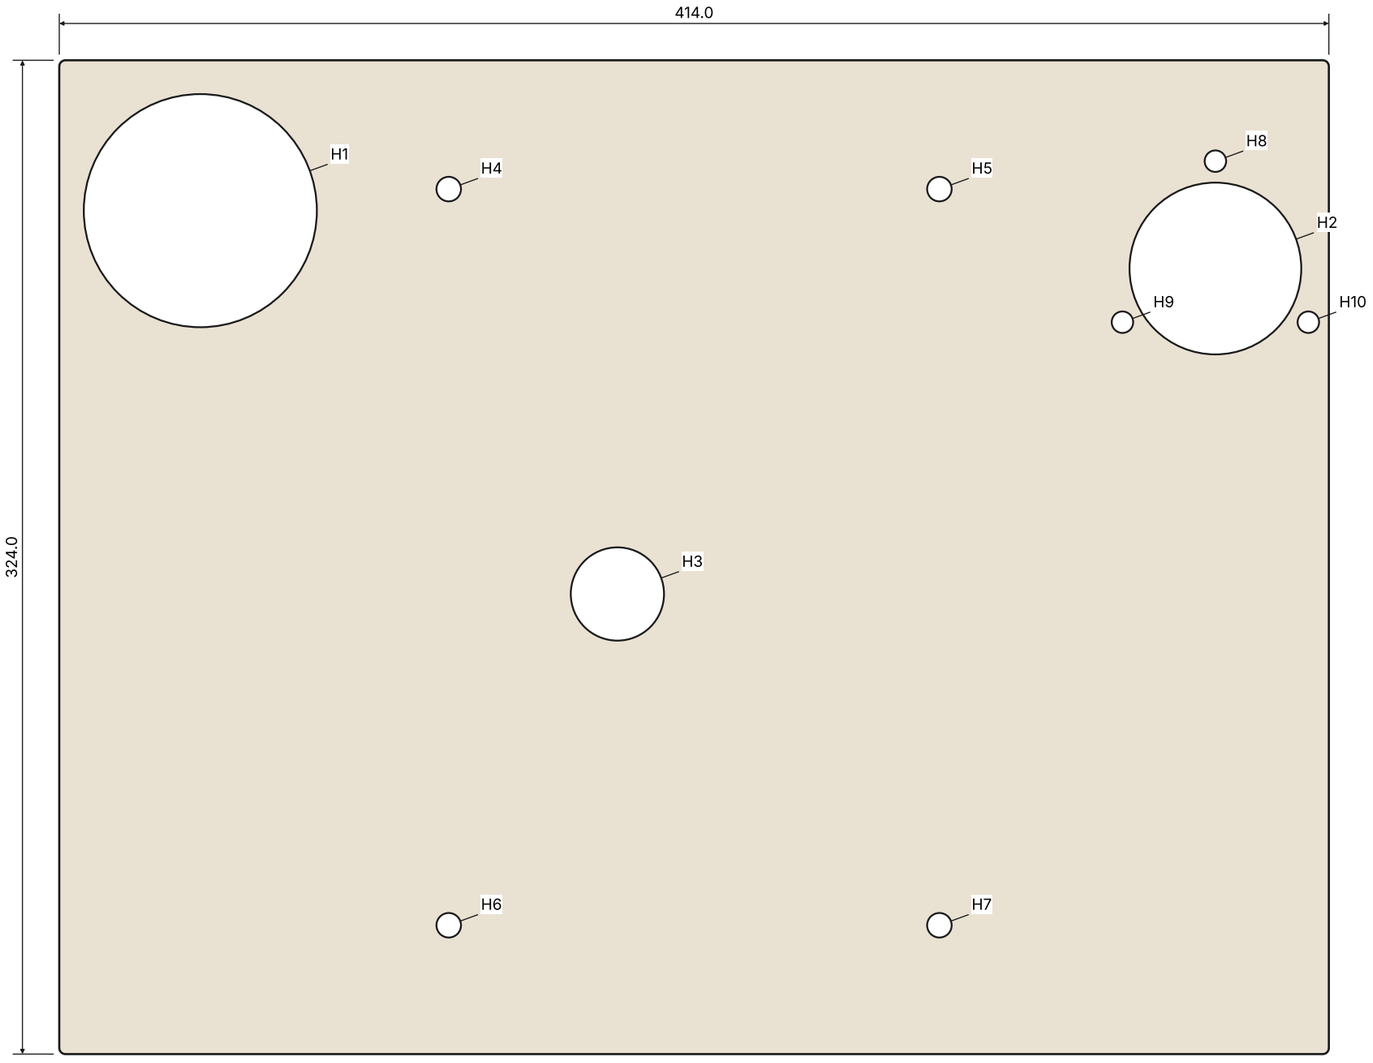

mark	size	x	y	depth
H1	Ø76.0	46.0	275.0	through
H2	Ø56.0	377.0	256.1	through
H3	Ø30.4	182.0	150.0	through
H4	Ø8.0	127.0	282.0	through
H5	Ø8.0	287.0	282.0	through
H6	Ø8.0	127.0	42.0	through
H7	Ø8.0	287.0	42.0	through
H8	Ø7.0	377.0	291.1	through
H9	Ø7.0	346.7	238.6	through
H10	Ø7.0	407.3	238.6	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

plinth-L1-inlay: 3 mm trucast-clear, 1 for the set, seen from its outer face


Sheet part: plinth-L1-inlay

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L2.dxf. Marks listed at the right.

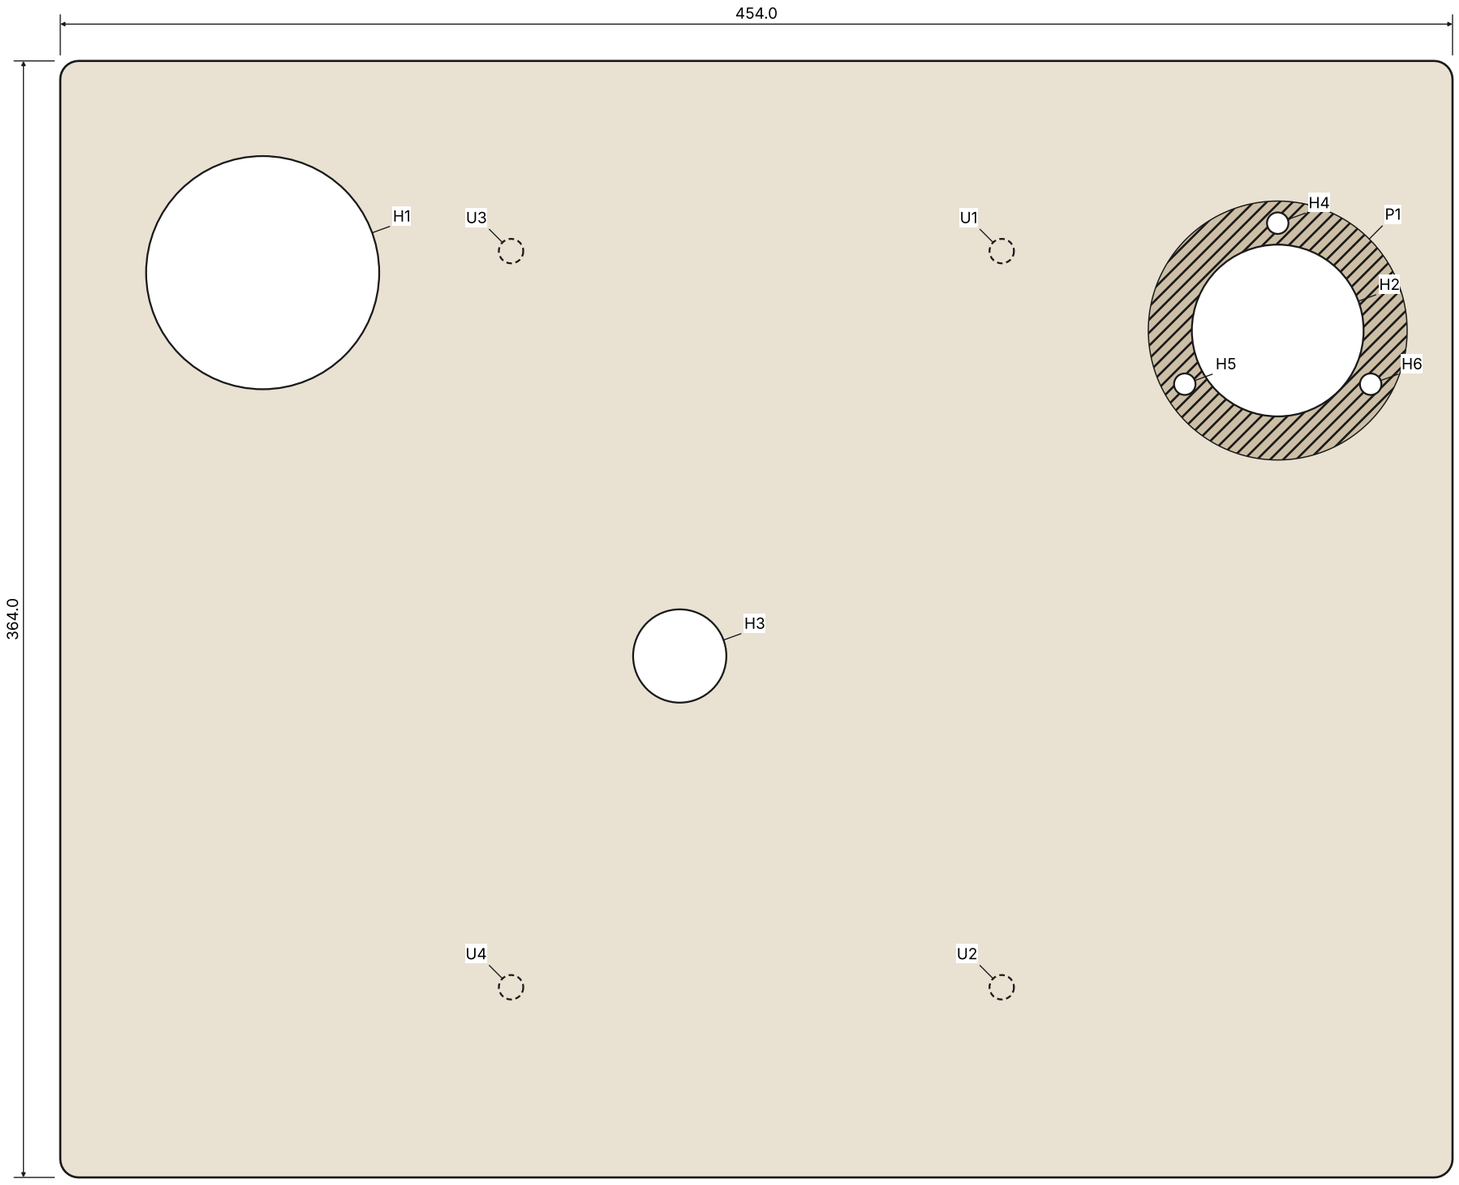

mark	size	x	y	depth
P1	Ø84.4	397.0	276.1	3.4 from face
H1	Ø76.0	66.0	295.0	through
H2	Ø56.0	397.0	276.1	through
H3	Ø30.4	202.0	170.0	through
H4	Ø7.0	397.0	311.1	through
H5	Ø7.0	366.7	258.6	through
H6	Ø7.0	427.3	258.6	through
U1	Ø8.0	307.0	302.0	9 from inside
U2	Ø8.0	307.0	62.0	9 from inside
U3	Ø8.0	147.0	302.0	9 from inside
U4	Ø8.0	147.0	62.0	9 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

plinth-L2: 12.7 mm trucast-clear, 1 for the set, seen from its outer face

inner-face pockets: dxf/plinth-L2-underside.dxf (seen from that face)


Sheet part: plinth-L2

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L3.dxf. Marks listed at the right.

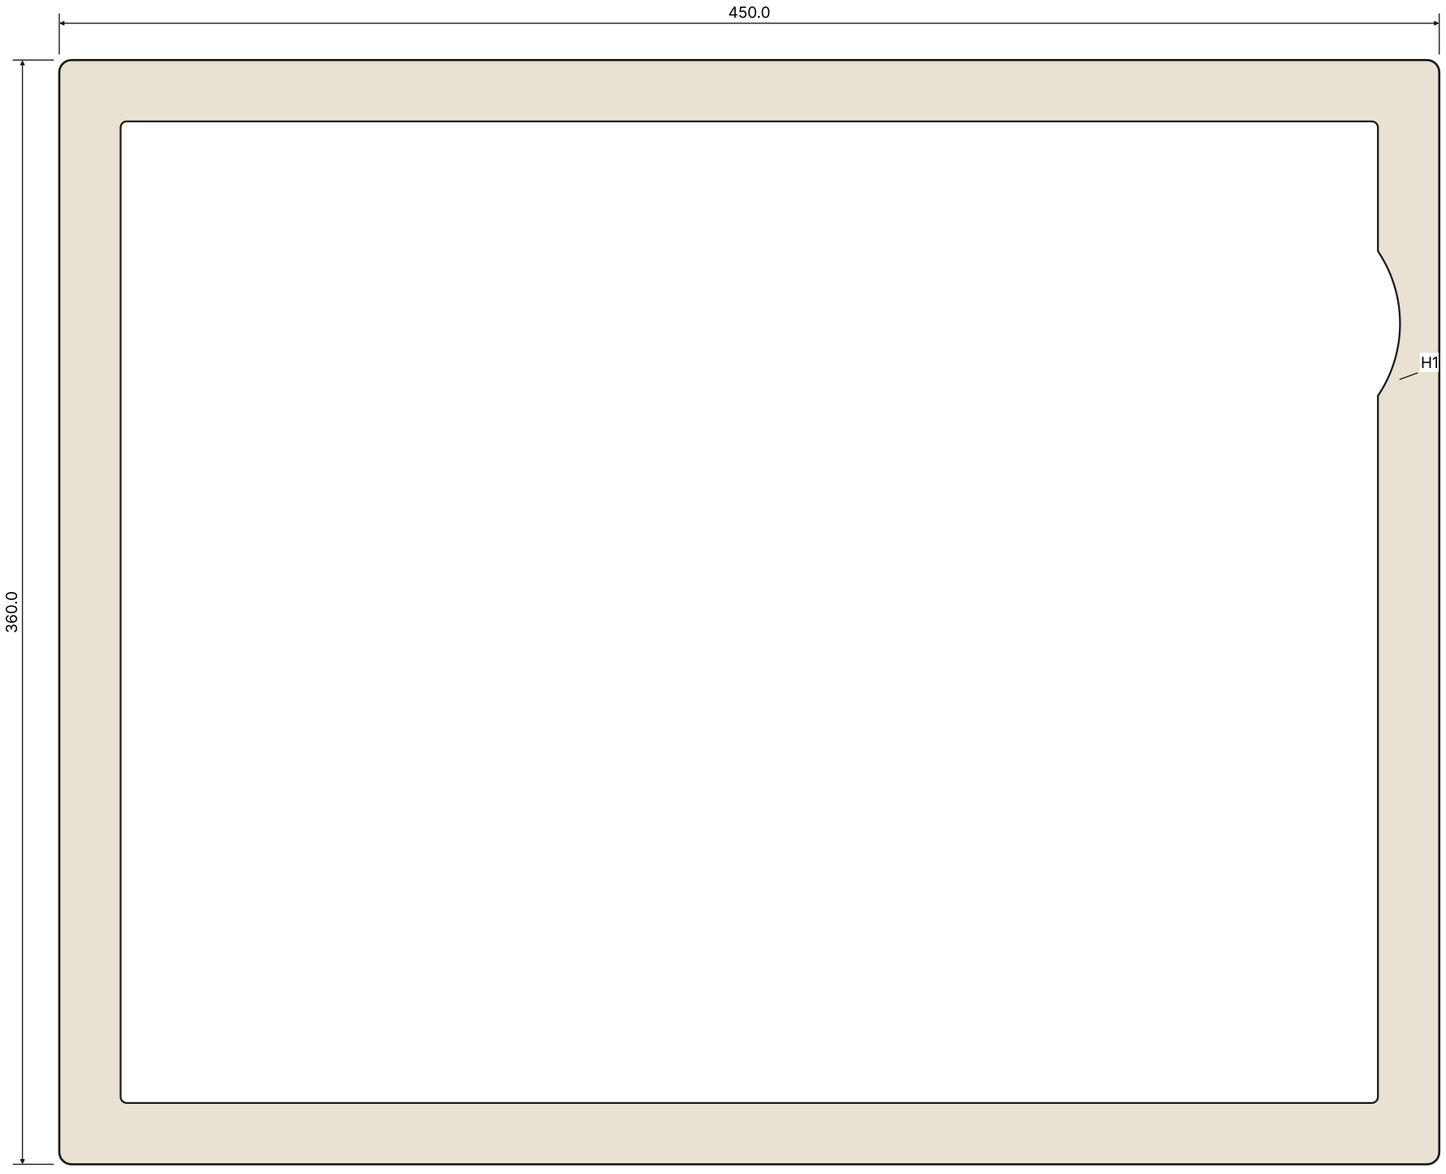

mark	size	x	y	depth
H1	profile (DXF)	228.6	180.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

plinth-L3: 3 mm trucast-tint, 1 for the set, seen from its outer face


Sheet part: plinth-L3

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L3-inlay.dxf. Marks listed at the right.

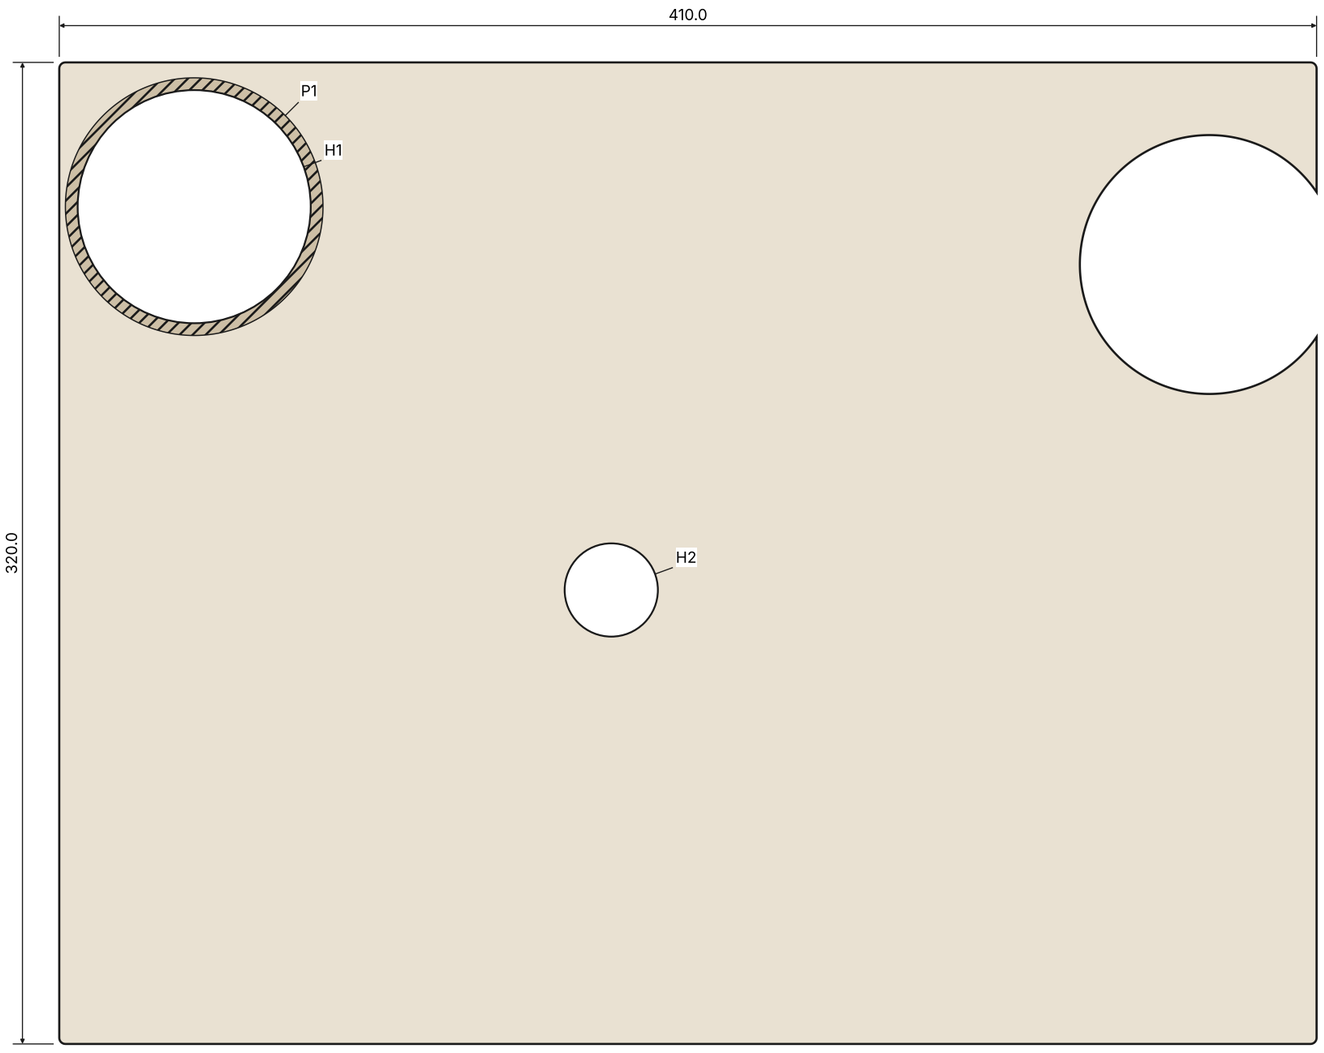

mark	size	x	y	depth
P1	Ø84.0	44.0	273.0	0.4 from face
H1	Ø76.0	44.0	273.0	through
H2	Ø30.4	180.0	148.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

plinth-L3-inlay: 3 mm trucast-clear, 1 for the set, seen from its outer face


Sheet part: plinth-L3-inlay

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L4.dxf. Marks listed at the right.

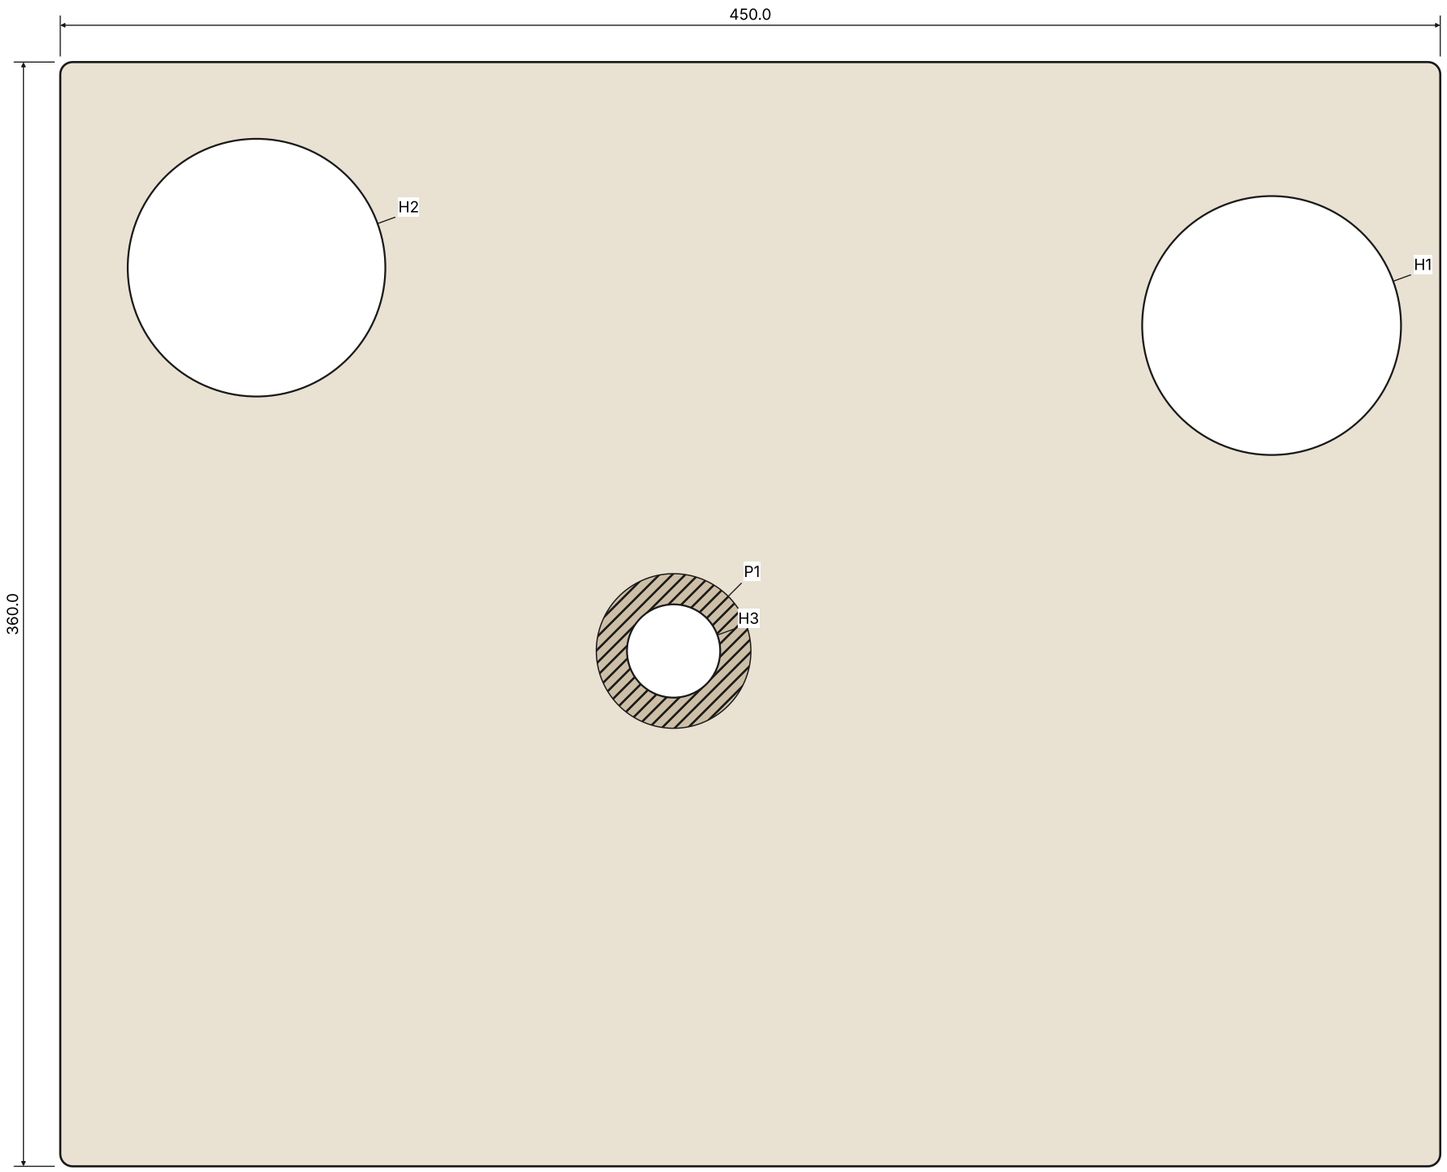

mark	size	x	y	depth
P1	Ø50.4	200.0	168.0	5 from face
H1	Ø84.4	395.0	274.1	through
H2	Ø84.0	64.0	293.0	through
H3	Ø30.4	200.0	168.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

plinth-L4: 5.6 mm trucast-clear, 1 for the set, seen from its outer face


Sheet part: plinth-L4

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/base-L1.dxf. Marks listed at the right.

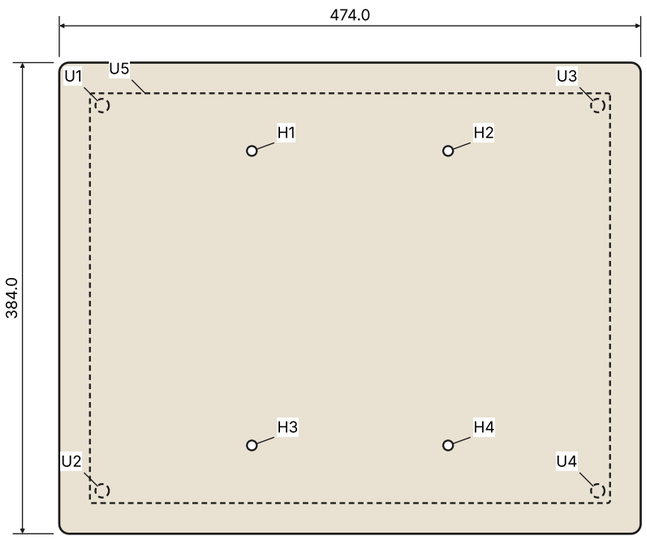

base-L1: 12.7 mm trucast-clear, 1 for the set, seen from its outer face

inner-face pockets: dxf/base-L1-underside.dxf (seen from that face)

mark	size	x	y	depth
H1	Ø8.0	157.0	312.0	through
H2	Ø8.0	317.0	312.0	through
H3	Ø8.0	157.0	72.0	through
H4	Ø8.0	317.0	72.0	through
U1	Ø11.0	35.0	349.0	10 from inside
U2	Ø11.0	35.0	35.0	10 from inside
U3	Ø11.0	439.0	349.0	10 from inside
U4	Ø11.0	439.0	35.0	10 from inside
U5	profile (DXF)	237.0	192.0	6 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: base-L1

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. As the router sees it from the outer face; DXF: dxf/base-L2.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	profile (DXF)	237.0	192.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

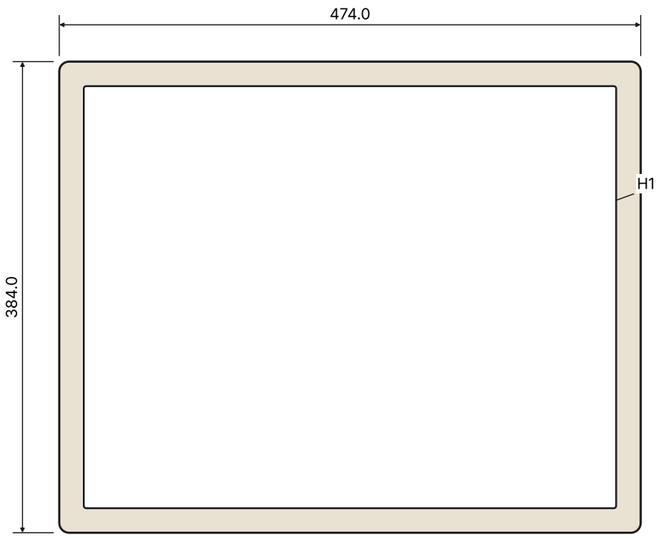

base-L2: 3 mm trucast-tint, 1 for the set, seen from its outer face


Sheet part: base-L2

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/base-L2-inlay.dxf. Marks listed at the right.

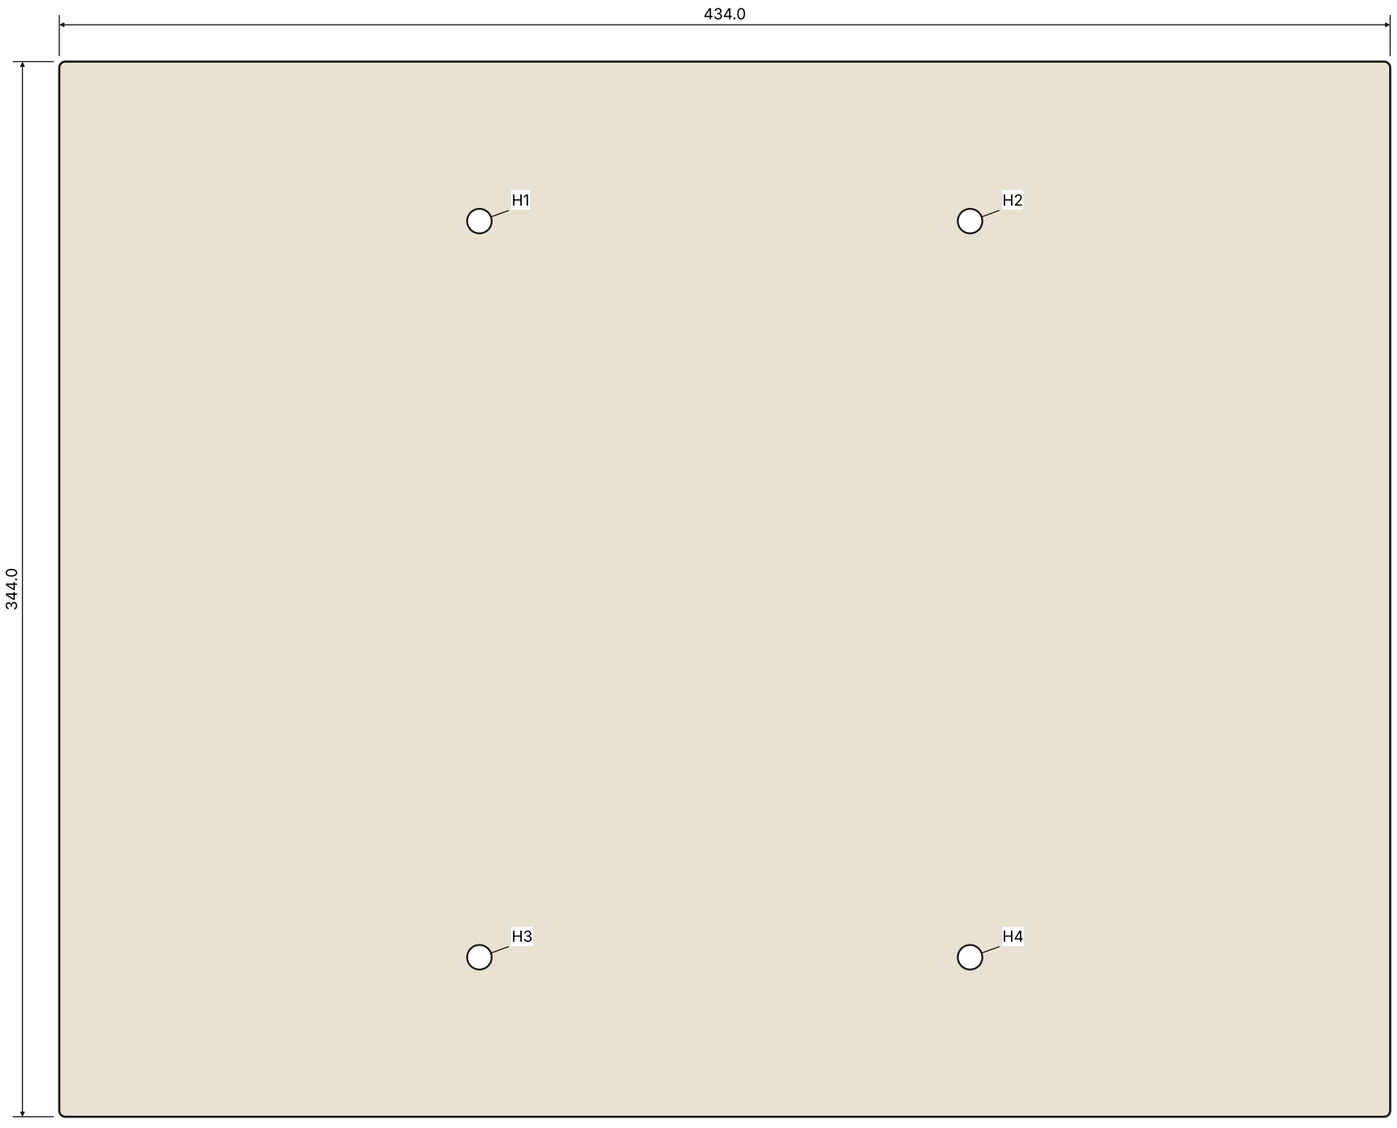

mark	size	x	y	depth
H1	Ø8.0	137.0	292.0	through
H2	Ø8.0	297.0	292.0	through
H3	Ø8.0	137.0	52.0	through
H4	Ø8.0	297.0	52.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

base-L2-inlay: 3 mm trucast-clear, 1 for the set, seen from its outer face

Sheet part: base-L2-inlay

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/motor-plate.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø26.0	41.0	41.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

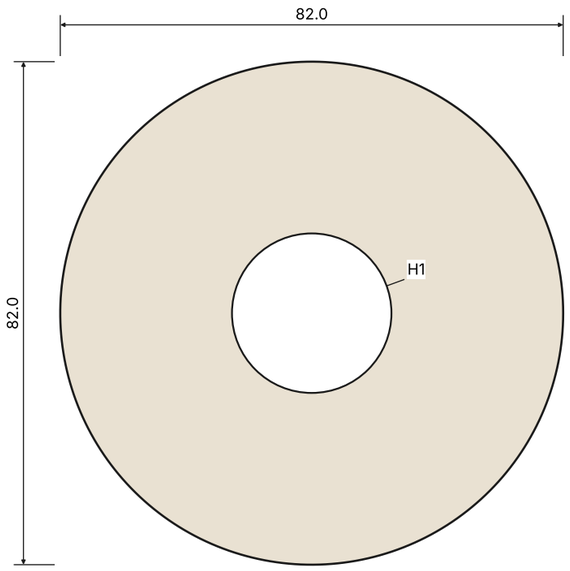

motor-plate: 3 mm aluminium, 1 for the set, seen from its outer face

Sheet part: motor-plate

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

11. post-1, post-2, post-3, post-4: lathe, cast-acrylic; 27 cm3 each; 4 for the set; 1:1


water-clear rod 30, bored 6.6, faced and polished; cemented under the plinth on a jig; an M6 stud through it, torqued 4 N m into the inserts top and bottom: rigid



FRONT




FROM THE RIGHT



FROM ABOVE

13. platter: lathe, cast-acrylic; 1466 cm3 each; 1 for the set; 1:5


tinted 3 / clear 12.7 / tinted 5.6 cemented, annealed, turned to 300 × 21 as Core's; on a screwed brass hub



FRONT



FROM THE RIGHT

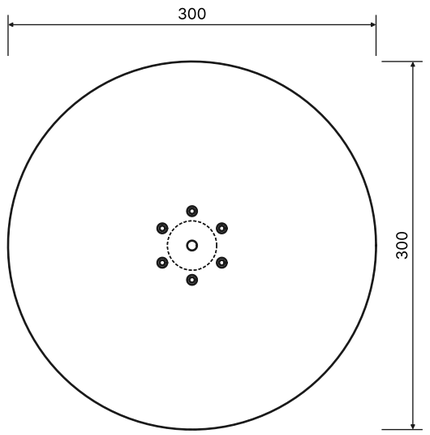

FROM ABOVE

Printed and machined parts


Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.


14. platter-hub: lathe, brass-leadfree; 33 cm3 each; 1 for the set; 1:2



FRONT




FROM THE RIGHT




FROM ABOVE

16. spindle: lathe, stainless; 5 cm3 each; 1 for the set; 1:2



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

17. bearing-housing: lathe, brass-leadfree; 31 cm3 each; 1 for the set; 1:1


as Core's: M30 × 1.5, clamped by its nut under the plinth, hanging 20 into the float where its brass shows

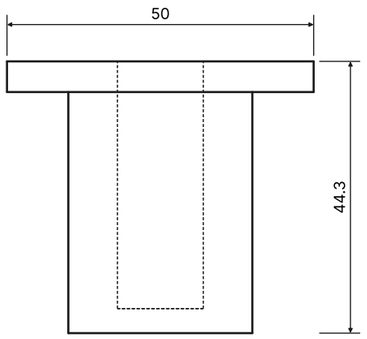

FRONT

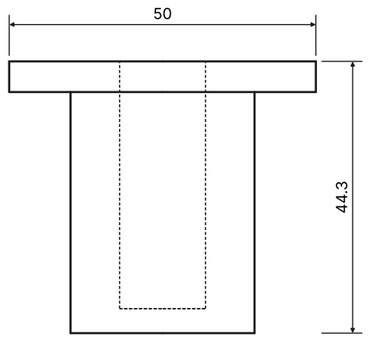


FROM THE RIGHT

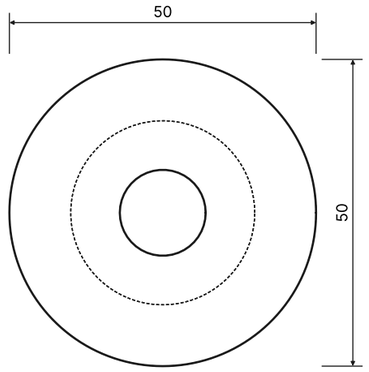


FROM ABOVE


18. bearing-nut: lathe, brass-leadfree; 7 cm3 each; 1 for the set; 1:1



FRONT



FROM THE RIGHT

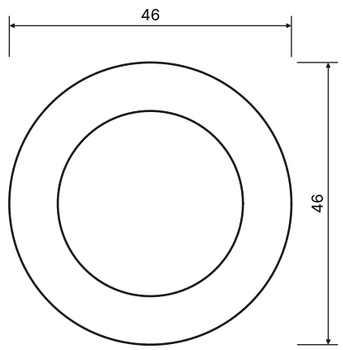

FROM ABOVE

Printed and machined parts


Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.


25. pulley: lathe, aluminium; 15 cm3 each; 1 for the set; 1:1



FRONT




FROM THE RIGHT




FROM ABOVE


27. arm-puck: lathe, aluminium; 60 cm3 each; 1 for the set; 1:2



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

30. feet: lathe, brass-leadfree; 55 cm3 each; 1 for the set; 1:10


four, 40 × 10 with a 30 neck, on M8 studs in the base's inserts, levelled and locked; Sorbothane under



FRONT




FROM THE RIGHT



FROM ABOVE

36. hinge-blocks: cnc-mill, cast-acrylic; 15 cm3 each; 1 for the set; 1:5


two 40 × 9.5 blocks of the colour, each with the hinge's slot 3.2 × 12 × 18 deep, on two M4 screws into inserts in the plinth's back edge (horizontal, in shear)



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	plinth-L1	cut	1	3 mm Cell-cast acrylic sheet, stock tint (TruCast 2064 Gray or 2423 Red), 4 × 8 ft	454 × 364	13.63
2	plinth-L1-inlay	cut	1	3 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft	414 × 324	6.04
3	plinth-L2	cut	1	12.7 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft	454 × 364	31.48
4	plinth-L3	cut	1	3 mm Cell-cast acrylic sheet, stock tint (TruCast 2064 Gray or 2423 Red), 4 × 8 ft	450 × 360	13.37
5	plinth-L3-inlay	cut	1	3 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft	410 × 320	5.90
6	plinth-L4	cut	1	5.6 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft	450 × 360	13.61
7	base-L1	cut	1	12.7 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft	474 × 384	34.67
8	base-L2	cut	1	3 mm Cell-cast acrylic sheet, stock tint (TruCast 2064 Gray or 2423 Red), 4 × 8 ft	474 × 384	15.02
9	base-L2-inlay	cut	1	3 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft	434 × 344	6.72
10	led-strip	buy	1	any (Waveform, LEDSupply, BTF kind) 24 V COB LED strip, dotless, 8 mm, 2700 K, CRI 90+, about 3 W/m; 1.48 m used in one closed loop (4.4 W)		40.00
11	post-1, post-2, post-3, post-4	lathe	4	Cast acrylic tube, tinted through	40 × 40 × 50	18.20
12	studs	buy	1	Four M6 × 75 stainless studs (A2), eight M6 brass threaded inserts for plastics (epoxy-bonded), thread-locker: the posts torqued 4 N m		14.00
13	platter	lathe	1	Cast acrylic tube, tinted through	310 × 310 × 22	169.57
14	platter-hub	lathe	1	Brass C69300 (Eco Brass, lead-free) or C27450	80 × 80 × 27	70.92
15	platter-screws	buy	1	Six M4 × 20 stainless socket button screws (ISO 7380), black oxide		6.00
16	spindle	lathe	1	Stainless steel 304	20 × 20 × 84	126.01
17	bearing-housing	lathe	1	Brass C69300 (Eco Brass, lead-free) or C27450	60 × 60 × 54	74.32
18	bearing-nut	lathe	1	Brass C69300 (Eco Brass, lead-free) or C27450	56 × 56 × 17	53.00
19	bushes	buy	1	any lathe shop Two solid bronze plain bushes (C932 / SAE 660), 10 × 14 × 12, pressed into the housing and honed or line-reamed to 10 H6 (8-12 um running clearance on a 10 g5 spindle)		40.00
20	ball	buy	1	Tungsten carbide ball, 6 mm, grade 10: the spindle's thrust point, seated in a cup at the spindle's foot		5.00
21	thrust-plate	buy	1	Thrust plate 13.8 × 3, hardened 52100 steel (60 HRC) lapped flat, at the foot of the housing's bore in the oil bath, under the carbide ball (a sapphire window of the same size is the alternative)		20.00
22	motor-plate	cut	1	3 mm Aluminium 5052 sheet	82 × 82	1.34
23	motor	buy	1	Rega 24 V low-vibration synchronous motor upgrade kit (motor, its board and mounting), for the Neo PSU		265.00
24	motor-grommets	buy	1	Rega Rega's motor mounting grommets (three), as fitted to the 24 V motor kit's mount; spares from a Rega dealer		15.00
25	pulley	lathe	1	Aluminium 6061	55 × 55 × 22	46.69
26	belt	buy	1	Flat turntable belt, ground rubber or polyurethane, 5 wide x 0.6, cut to the measured path (about 945 long for the 994 path, 5 % stretch); an O-ring test belt first		30.00
27	arm-puck	lathe	1	Aluminium 6061	94 × 94 × 22	49.86

Parts list (1 of 3)

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
28	arm	buy	1	Rega RB330 tonearm (9 in, Rega geometry: 222 mm from the platter's centre to the arm's hole, effective length 236.5, overhang 14.5, offset 21.55 deg), with its own lead and cueing lift		675.00
29	cartridge	buy	1	Ortofon 2M Black moving-magnet cartridge (nude Shibata stylus), black body, 1/2 in mount		750.00
30	feet	lathe	1	Brass C69300 (Eco Brass, lead-free) or C27450	454 × 364 × 22	577.95
31	foot-pads	buy	1	Isolate It (Sorbothane Inc.) Three Sorbothane discs 40 × 4, 50 duro, bonded under the brass feet: about 45 N each, 36 kPa		20.00
32	foot-studs	buy	1	Three M8 × 30 stainless studs, three M8 brass lock nuts (thin), three M8 × 12 brass threaded inserts (for acrylic, epoxy-bonded)		18.00
33	phono-stage	buy	1	Pro-Ject Phono Box S2, MM/MC phono stage in an aluminium case, 103 × 115 × 36 (one listing 103 × 36 × 115 mm, 0.57 kg): RIAA within 0.4 dB 20 Hz-20 kHz, MM S/N 94 dBA at 40/43 dB gain, THD under 0.01 %, subsonic filter 20 Hz 12 dB/oct, MM 47k		269.00
34	phono-pads	buy	1	Four 10 mm felt pads under the phono stage		2.00
35	back-hardware	buy	1	Neutrik / Switchcraft / CUI kind Two gold panel RCA jacks (insulated, 1/4 in hole), a 4 mm earth binding post, a DPDT mini toggle (C&K 7201 kind), a 2.1 mm DC panel jack; shielded leads inside to the S2		48.00
36	hinge-blocks	cnc-mill	1	Cast acrylic tube, tinted through	344 × 20 × 29	52.86
37	hinges	buy	1	Pro-Ject Replacement dust cover hinge for Debut series (rp-611), two: friction hinges that hold the lid open at any angle, a spring blade clamped to the lid's back wall, the foot in a slot (here a pocket in an acrylic block on the plinth's		34.00
38	lid-top	cut	1	3 mm Cell-cast acrylic sheet, stock tint (TruCast 2064 Gray or 2423 Red), 4 × 8 ft	452 × 362	13.50
39	lid-front, lid-back	cut	2	3 mm Cell-cast acrylic sheet, stock tint (TruCast 2064 Gray or 2423 Red), 4 × 8 ft	452 × 97	3.62
40	lid-left, lid-right	cut	2	3 mm Cell-cast acrylic sheet, stock tint (TruCast 2064 Gray or 2423 Red), 4 × 8 ft	356 × 97	2.85
41	led-adapter	buy	1	Mean Well GST25A24-P1J desktop adapter, 24 V DC 1.04 A (25 W), level VI, IEC C8 inlet, 2.1 mm plug; UL/cUL 62368-1 listed, a Class 2 / limited power source (the strip draws 6.8 W)		19.00
42	led-dimmer	buy	1	Waveform Lighting FilmGrade Flicker-Free LED Dimmer, part 3081, 6-60 V DC, 10 A, turn dial, in line on the 24 V lead; PWM at 25 kHz (Waveform's knowledge base; the store page says flicker-free 0-100 %), above anything a phono stage hears		80.00
43	inserts	buy	1	any (E-Z Lok / Tappex kind) Brass threaded inserts for plastics, epoxy-bonded: 3 M5 (the puck), 4 M3 (the back plate); with M5 × 12 countersunk and M3 × 6 button screws		14.00
44	wiring	buy	1	Shielded interconnects inside (the arm's lead to the S2, the S2 to the plate), a star earth at the plate's post (arm, bearing housing via an M3 ring tag, S2), two clear cord clips under the deck, a cord grip for the Neo's lead		25.00
45	neo-psu	buy	1	Rega Neo PSU MK2: DSP-generated drive for Rega's 24 V motor, 33/45 by a button, fine speed trim (0.01 rpm steps) on the back; US 60 Hz 115-120 V version		445.00
46	bearing-oil	buy	1	Turntable bearing oil, 8 ml (a light synthetic oil, ISO VG 32 or as the bush maker says)		15.00

Parts list (2 of 3)

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
47	cement	buy	1	Evonik (Röhm) ACRIFIX 2R 0190, two-component polymerising cement for cast acrylic (cures through any tint, unlike the one-part light-curing 1R 0192); Weld-On 40 or 42 is the US equivalent		45.00

Parts list (3 of 3)

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Notes

1. The plinth: tinted 3 ring / clear 12.7 / tinted 3 ring / clear 5.6 (24.3), each tinted ring 20 wide round a clear inlay, cemented with ACRIFIX 2R 0190 in one vacuum press, annealed, fly-cut, stepped 2 mm a stratum, diamond-polished.
2. The float: four clear posts bonded under the plinth, M6 studs torqued 4 N m into inserts in the plinth and the base: rigid. Isolation in the four feet (brass on Sorbothane, on M8 studs, levelled and locked).
3. The light: a dotless 24 V COB strip, 3 W/m, one closed loop in a 3 × 6 slot routed from below 25 in from the base's edge; the black band printed on the clear before lamination; Mean Well listed adapter and the 25 kHz dimmer. The phono stage runs from its own listed adapter.
4. The motor: Rega 24 V on its plate, hung on Rega's grommets in a pocket through the plinth, below it in the float.
5. The bearing, platter, arm puck and phono stage as Core's (mantle_core.py).
6. The lid: 3 mm 2064, 1.1 kg, on Pro-Ject's friction hinges.

Notes

Mantle: Strata Float (proposal A): Belt-drive record player, a laminated plinth floating over a lit lamin

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15