


Scale 1:10. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

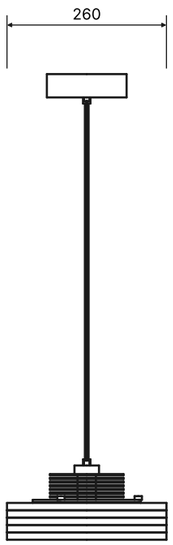

FROM THE RIGHT

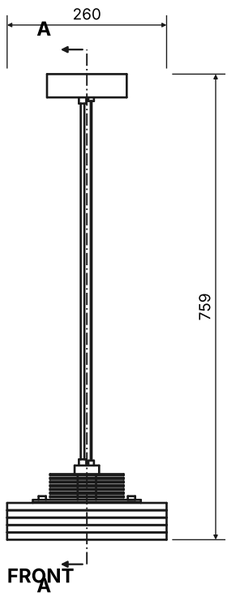

FRONT



FROM ABOVE


General arrangement

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. Section A-A (sheet 1): the product cut at x 0.0 and seen from the right; cut faces hatched, a different angle for each part.

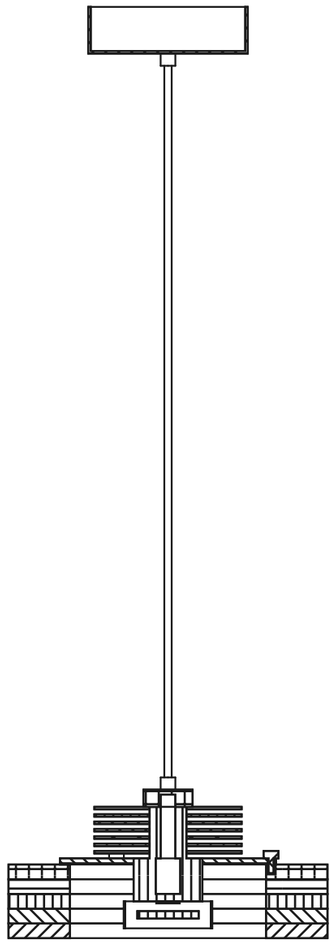


Section A-A

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:10, parts drawn apart. Balloons are the parts list's numbers (last sheet).

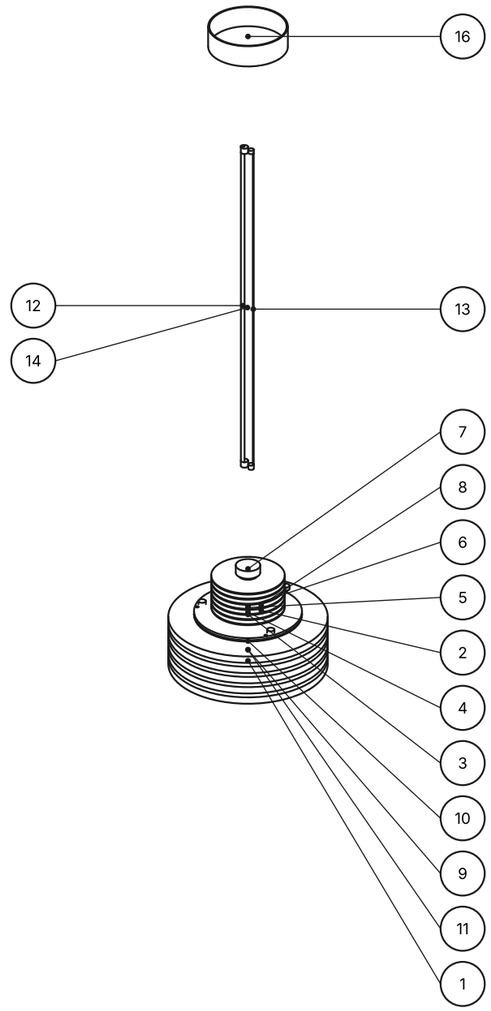

Exploded view

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/ring-01.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø160.0	130.0	130.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

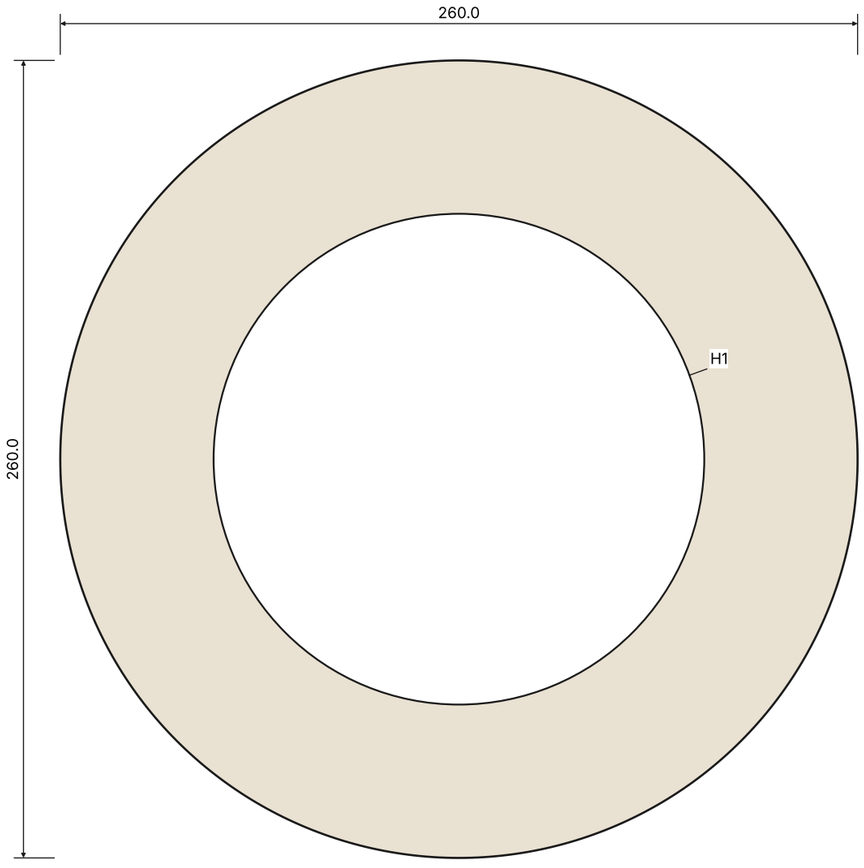

ring-01: 12 mm cast-acrylic, 1 for the set, seen from its outer face

Sheet part: ring-01

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/ring-02.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø160.0	130.0	130.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

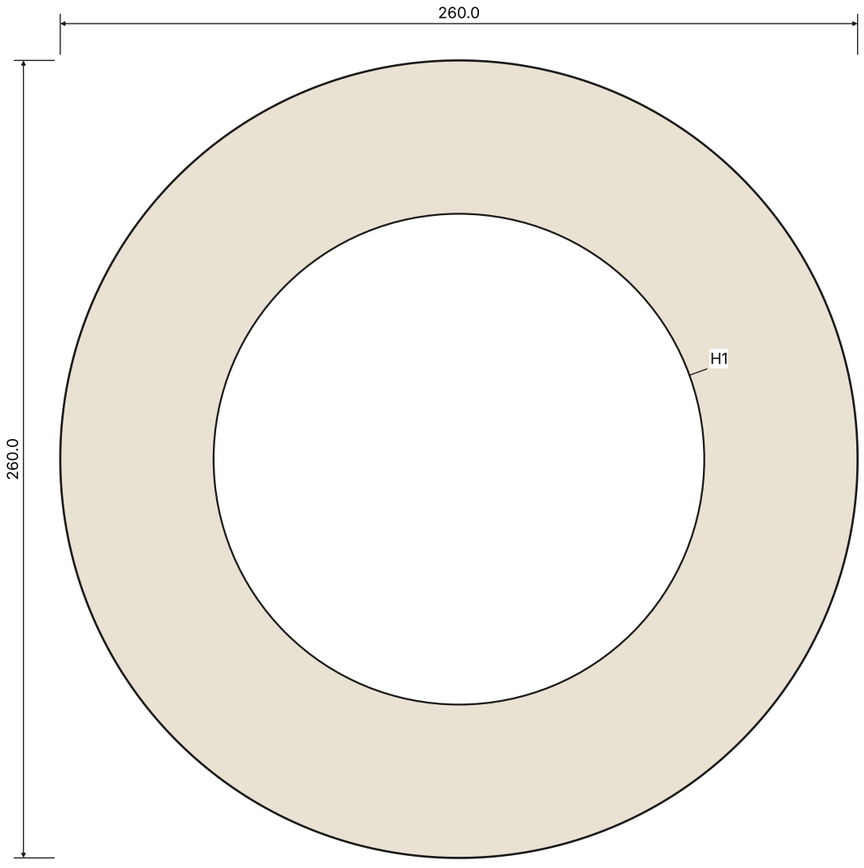

ring-02: 12 mm cast-acrylic, 1 for the set, seen from its outer face

Sheet part: ring-02

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/ring-03.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø160.0	130.0	130.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

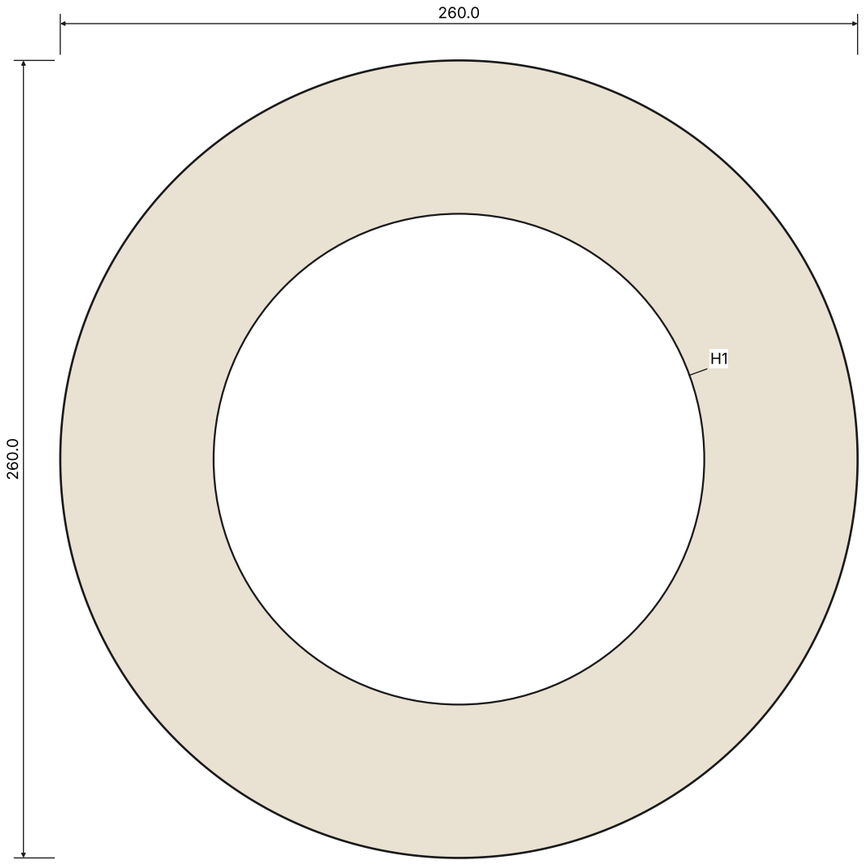

ring-03: 12 mm cast-acrylic, 1 for the set, seen from its outer face


Sheet part: ring-03

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/ring-04.dxf. Marks listed at the right.

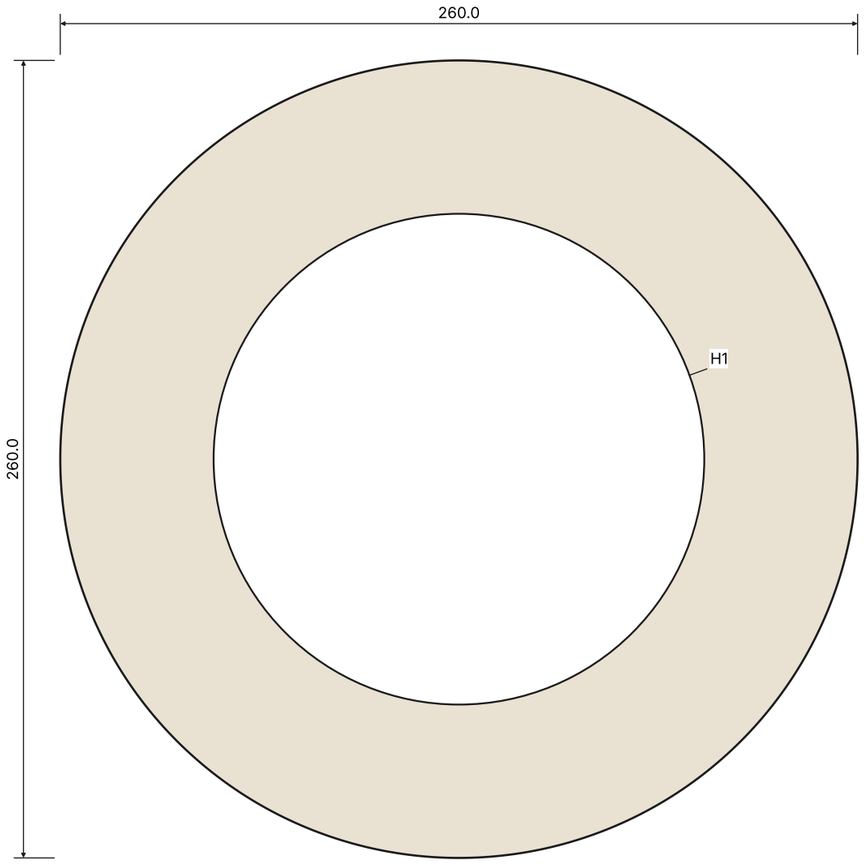

ring-04: 12 mm cast-acrylic, 1 for the set, seen from its outer face

mark	size	x	y	depth
H1	Ø160.0	130.0	130.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

Sheet part: ring-04

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/ring-05.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø160.0	130.0	130.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

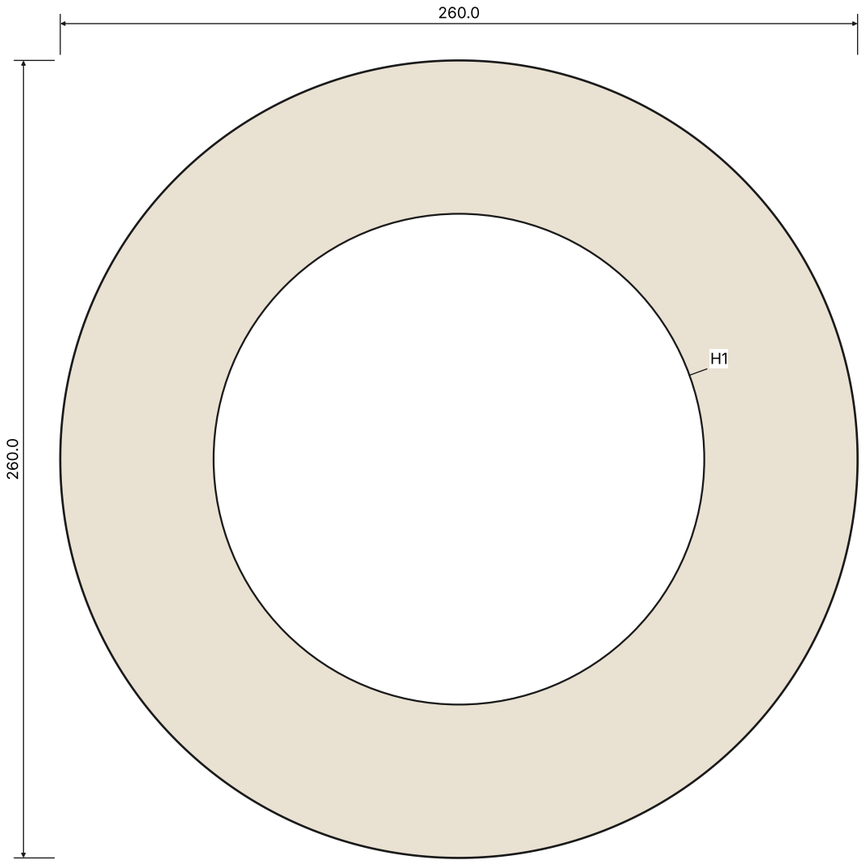

ring-05: 12 mm cast-acrylic, 1 for the set, seen from its outer face

Sheet part: ring-05

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/fin-1.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø30.1	60.0	60.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

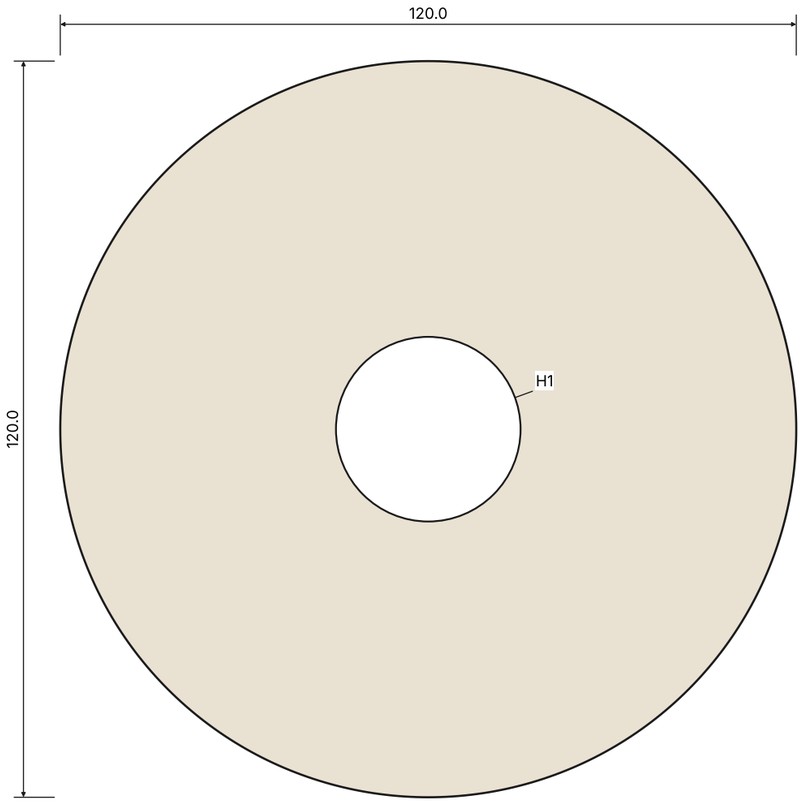

fin-1: 2 mm aluminium, 1 for the set, seen from its outer face

Sheet part: fin-1

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/fin-2.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø30.1	60.0	60.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

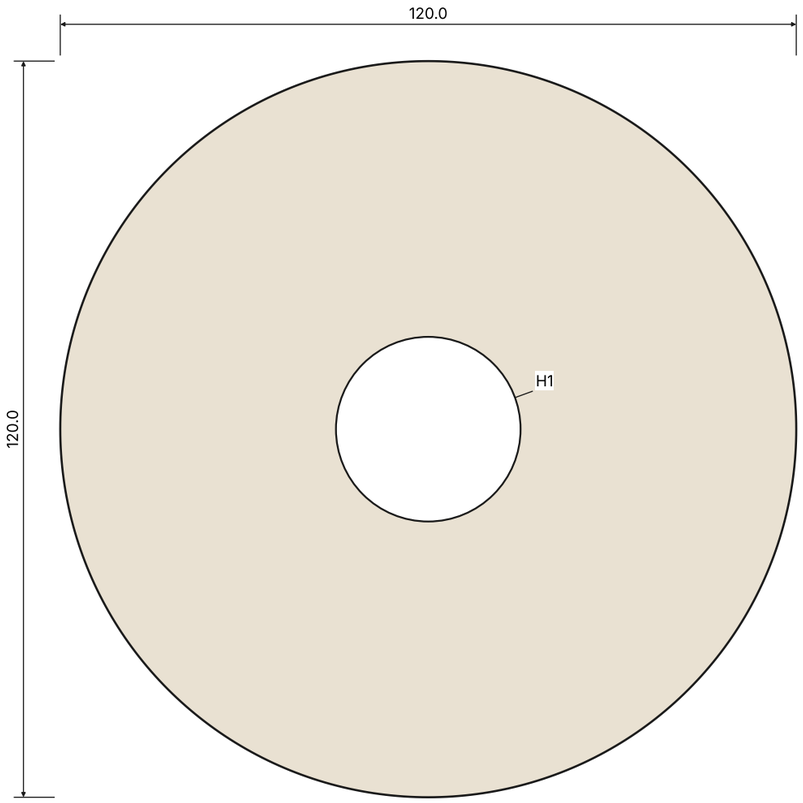

fin-2: 2 mm aluminium, 1 for the set, seen from its outer face

Sheet part: fin-2

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/fin-3.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø30.1	60.0	60.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

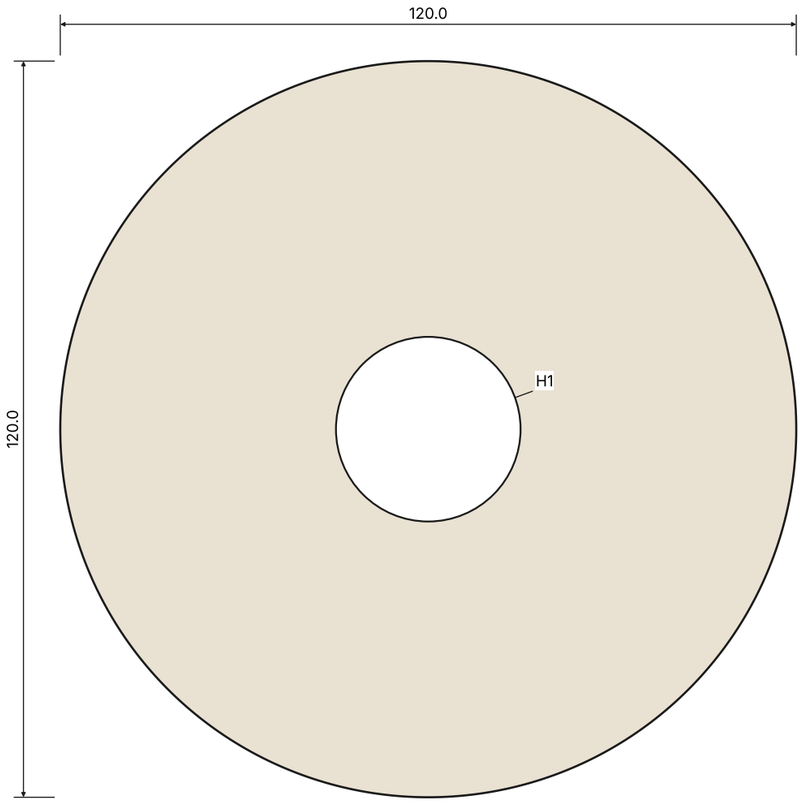

fin-3: 2 mm aluminium, 1 for the set, seen from its outer face

Sheet part: fin-3

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/fin-4.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø30.1	60.0	60.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

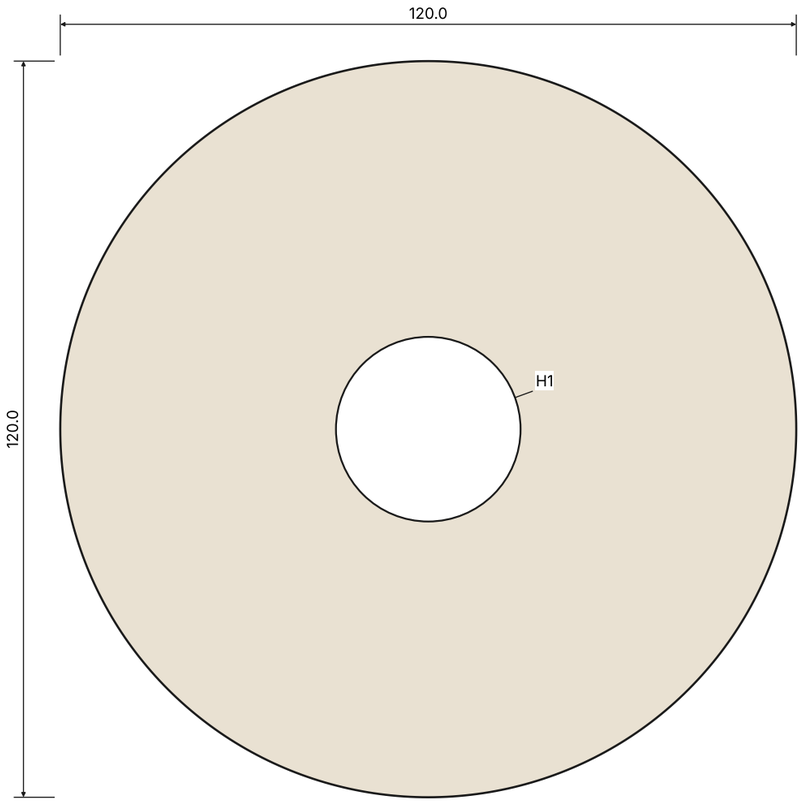

fin-4: 2 mm aluminium, 1 for the set, seen from its outer face

Sheet part: fin-4

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/fin-5.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø30.1	60.0	60.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

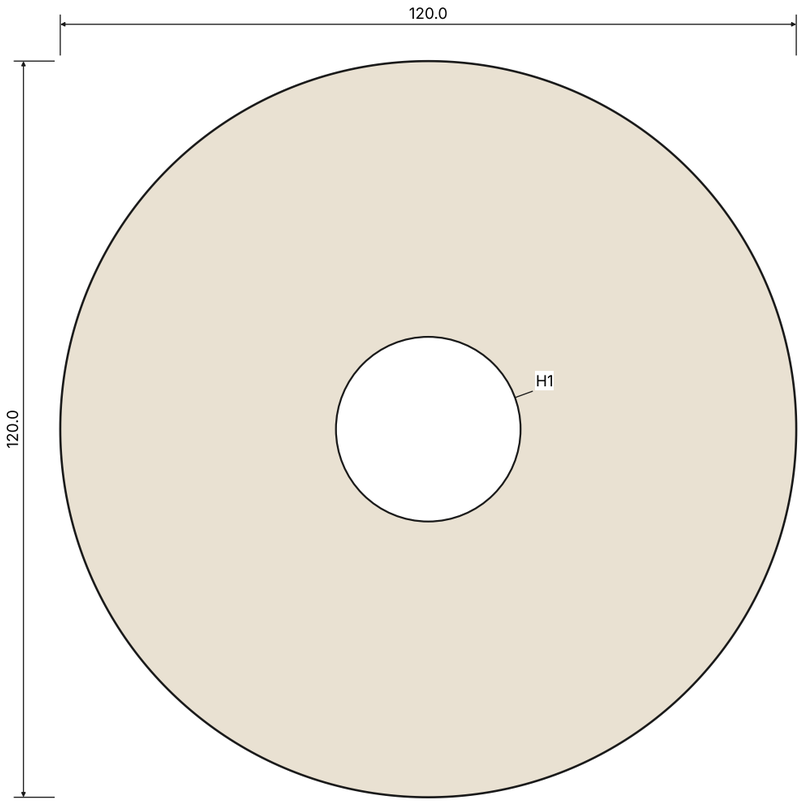

fin-5: 2 mm aluminium, 1 for the set, seen from its outer face

Sheet part: fin-5

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/fin-6.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø30.1	60.0	60.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

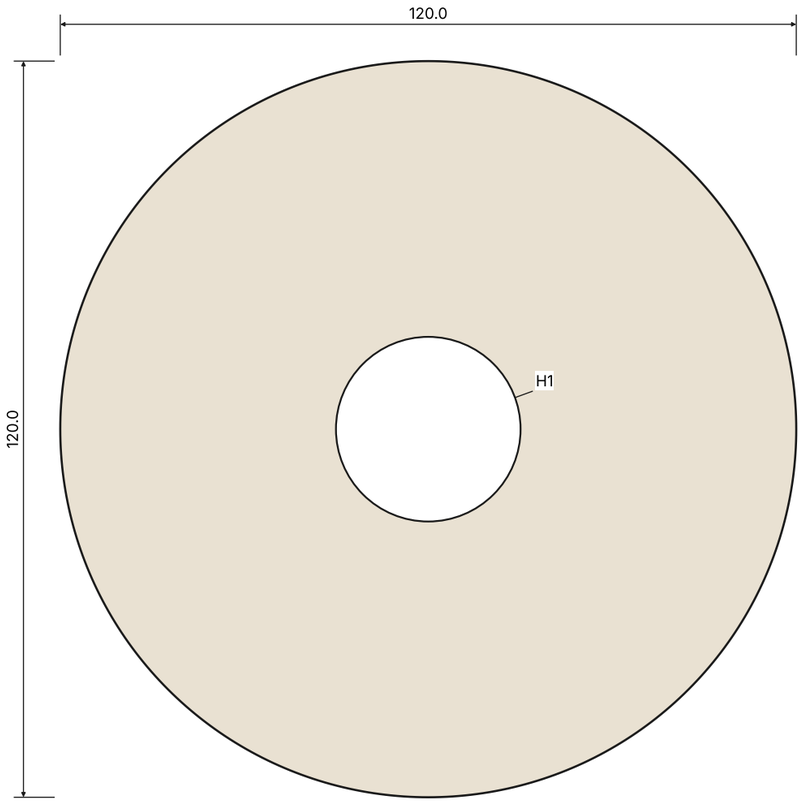

fin-6: 2 mm aluminium, 1 for the set, seen from its outer face

Sheet part: fin-6

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/fin-7.dxf. Marks listed at the right.

mark	size	x	y	depth
H1	Ø30.1	60.0	60.0	through

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

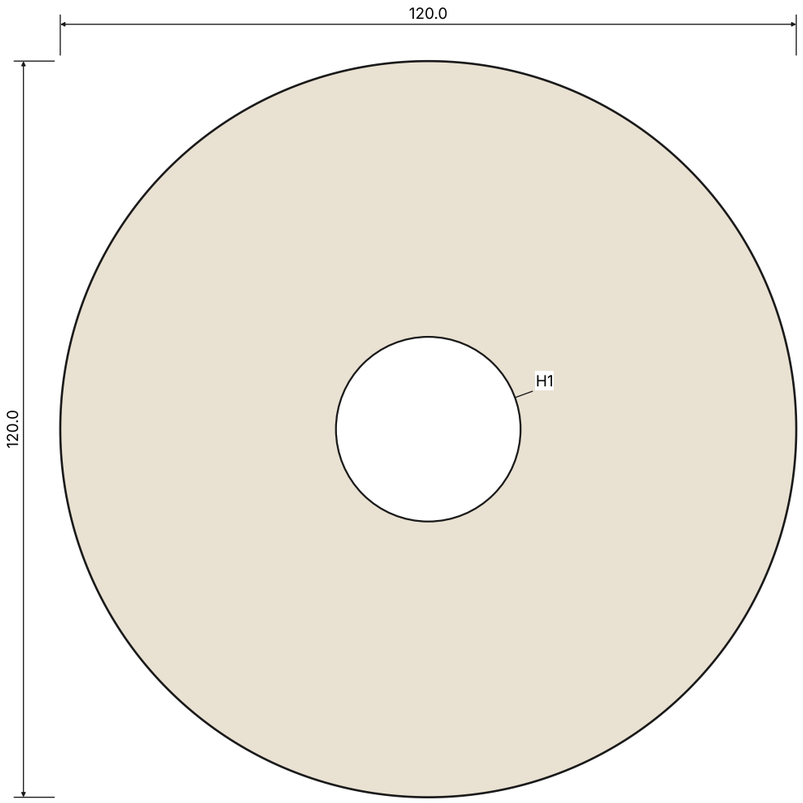

fin-7: 2 mm aluminium, 1 for the set, seen from its outer face

Sheet part: fin-7

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

4. flange: lathe, aluminium; 87 cm3 each; 1 for the set; 1:5


6061, turned, bead-blasted and black anodised: a 176 plate over the bore, three 4.5 holes for the thumbscrews



FRONT




FROM THE RIGHT




FROM ABOVE

5. core: lathe, aluminium; 102 cm3 each; 1 for the set; 1:2


6061 from 2 1/2 in bar: the COB's seat (an Ideal Chip-Lok holder, two M3) faced flat on its underside, thermal pad; up through the top ring with 2 mm clearance; its spigot above takes the fins on spacers and the cap, an M20 thread



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

7. cap: lathe, aluminium; 16 cm3 each; 1 for the set; 1:1


the cord grip and the cable gripper go into its top, side by side



FRONT




FROM THE RIGHT




FROM ABOVE

16. canopy: lathe, aluminium; 55 cm3 each; 1 for the set; 1:5


spun or turned aluminium, black anodised; the ERP driver inside, on the crossbar



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	ring-01, ring-02, ring-03, ring-04, ring-05	cut	5	12 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	260 × 260	19.27
2	inserts	buy	3	any (E-Z LOK, Tappex or alike) Brass threaded insert for plastics, M4, heat-set, 5.6 OD x 8 long		0.50
3	gasket	buy	1	1 mm silicone sheet ring under the sink's flange, cut on a cutter plotter		1.00
4	flange	lathe	1	Aluminium 6061	186 × 186 × 14	57.11
5	core	lathe	1	Aluminium 6061	66 × 66 × 87	54.47
6	fin-1, fin-2, fin-3, fin-4, fin-5, fin-6, fin-7	cut	7	2 mm Aluminium 5052 sheet	120 × 120	2.88
7	cap	lathe	1	Aluminium 6061	50 × 50 × 24	46.50
8	thumbscrews	buy	3	any (a machine shop, or Misumi knurled thumb screws) M4 knurled thumb screws, 304 stainless, 12 head x 6, shoulder 8, captive in the sink's flange		4.00
9	reflector	buy	1	a machine shop The COB's reflector: a spun or turned aluminium cone, bead-blasted satin inside (so about a quarter of the light spills wide onto the rings), black outside		9.00
10	cob	buy	1	Bridgelux Vero SE 10 COB, 2700 K, CRI 90, at 180 mA about 590 lm, 24.6 V, 4.4 W (the 575 lm level), in an Ideal Chip-Lok holder		12.00
11	louvre	buy	1	any (a lighting louvre maker) Black anodised aluminium honeycomb louvre, 50 across, 3.2 cell, 6 deep: no direct view of the COB beyond about 30 deg off the axis		8.00
12	cord	buy	1	any UL listed 18/2 SVT cord, black rayon or cotton braid, 3 m cut to the drop (beside the suspension cable)		9.00
13	cable	buy	1	1.5 mm 7×7 stainless aircraft cable, 2 m, cut to the drop		3.00
14	grips	buy	2	Heyco (or alike, UL recognised) Black nylon liquid-tight cord grip, PG7 / 1/4 NPT class, for a round 18/2 cord, two (canopy and sink)		3.00
15	grippers	buy	2	any listed (Gripple, Bettercable or alike) Pendant cable gripper for 1.5 mm stainless aircraft cable, adjustable, M10 × 1 or 1/8 IPS thread, rated well over 10 kg, two (canopy and sink)		12.00
16	canopy	lathe	1	Aluminium 6061	140 × 140 × 48	68.52
17	driver	buy	1	ERP Power ESS010W-0180-42, 180 mA constant current, phase and 0-10 V dimming, Class 2 (components.json north-driver-575)		16.00
18	crossbar	buy	1	Canopy crossbar for a 4 in outlet box, two 8-32 screws, a ground screw		3.00

Parts list

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Notes

1. A proposal (strata/README.md): Hemisphere as a ring of strata, the pendant twin of Core Sample. The current Hemisphere (dome_pendant.py) stays the baseline.
2. The ring: 5 discs of 1/2 in cast sheet (Dust / Dust / Ember / Dust / Dust from the bottom), 260 across with a 160 bore, 60 tall (64 at 12.7), bonded, annealed; the outside turned and, disc by disc, buffed clear or bead-blasted satin; the bore blasted. About 2.36 kg of acrylic.
3. The light: Terrace's engine (a Vero SE 10 at 180 mA, about 590 lm, in a satin reflector behind a honeycomb louvre), on a plate over the bore held by three thumbscrews. The table gets the COB's light straight through the bore; the ring glows from the spill.
4. Heat (worked): the same seven fins: about 6 K over the room; the plate sits on a gasket on the top disc, far under 70 C.
5. Weight: about 3.0 kg on the 1.5 mm stainless cable and a listed gripper.
6. Service: three thumbscrews and the ring lifts off the engine; the COB on two screws; the driver in the canopy.

Notes

Halo: Pendant: a thick ring of bonded tint discs, lit from its bore

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15