


Scale 1:5. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

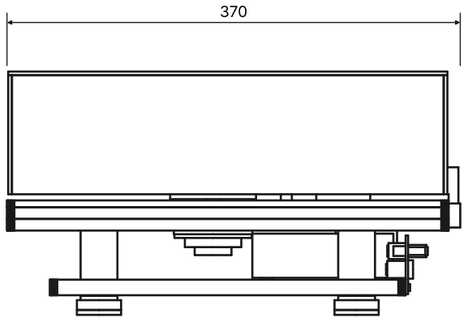


**FROM THE RIGHT**

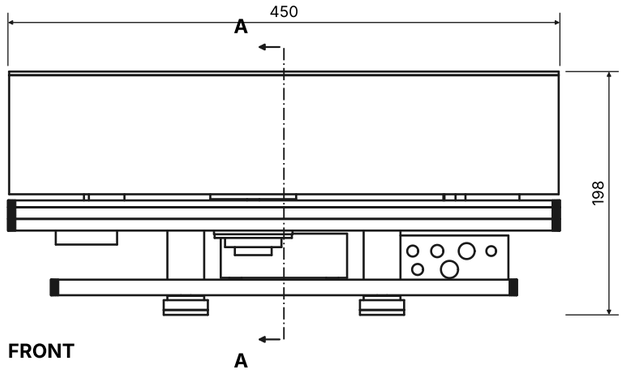


**FRONT**

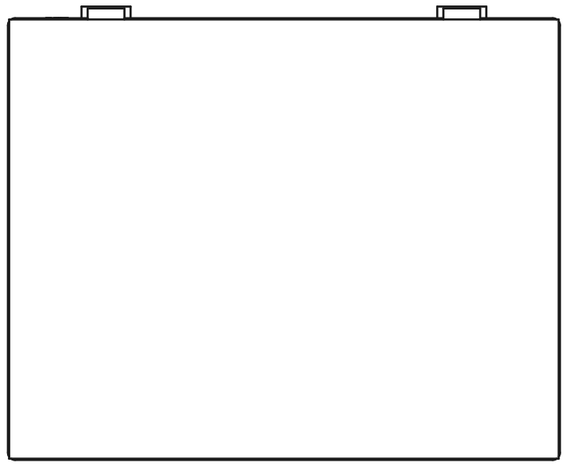

**FROM ABOVE**


# General arrangement

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. Section A-A (sheet 1): the product cut at x 235.0 and seen from the right; cut faces hatched, a different angle for each part.

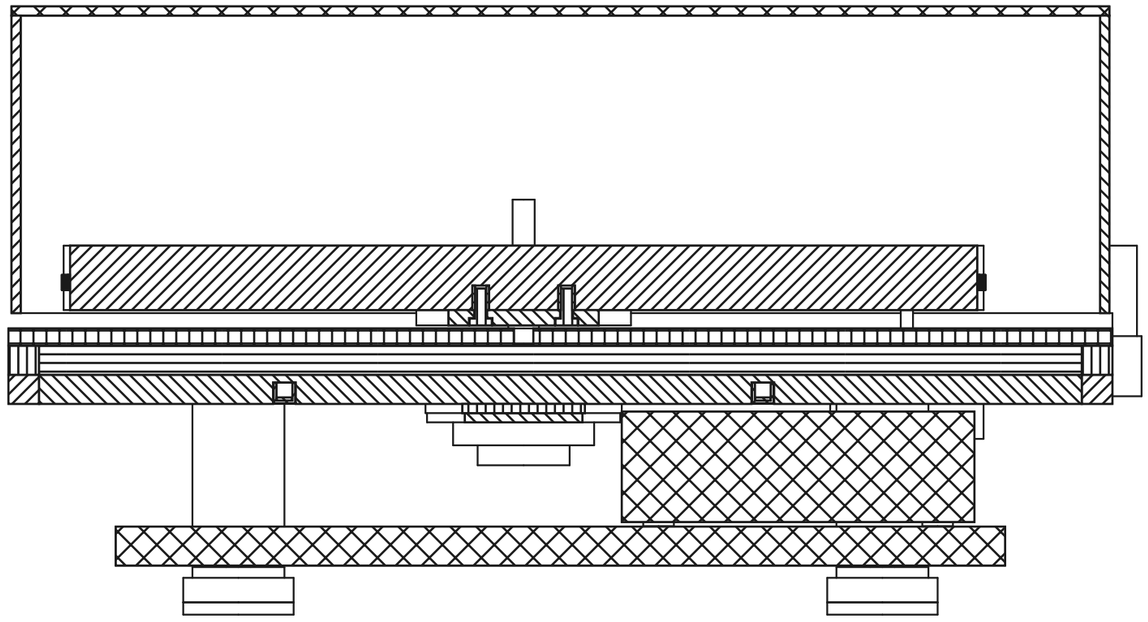


## Section A-A

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5, parts drawn apart. Balloons are the parts list's numbers (last sheet).

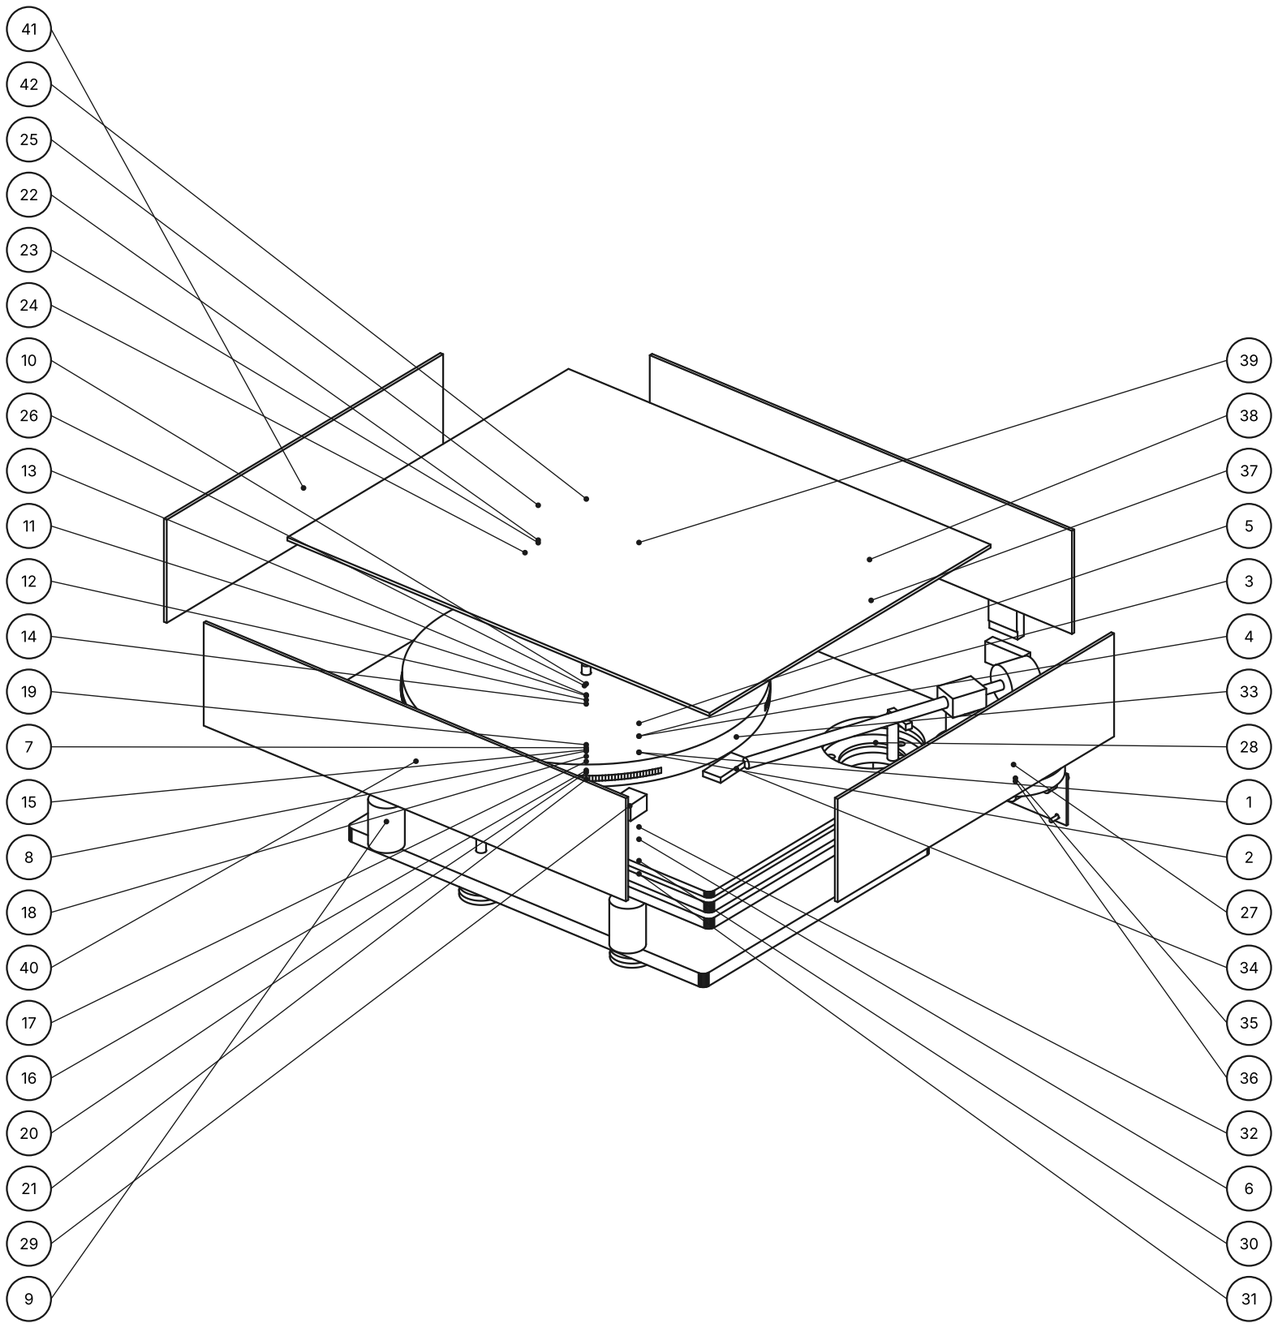



# Exploded view

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:5. Panels cut to their outline only (DXF files in dxf/); sizes as seen from the outer face.

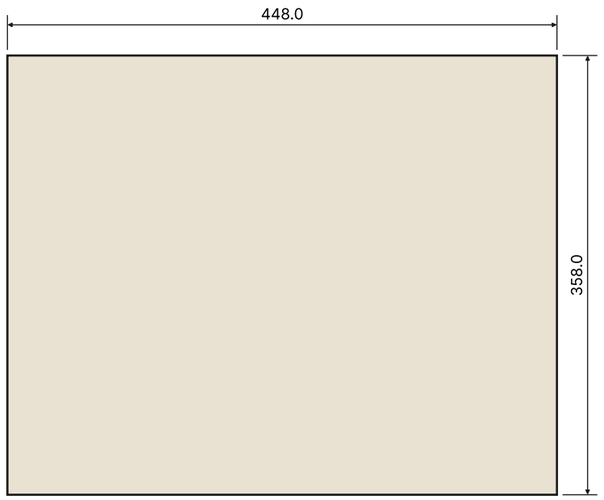



**lid-top**

3 mm trucast-tint, 1 for the set

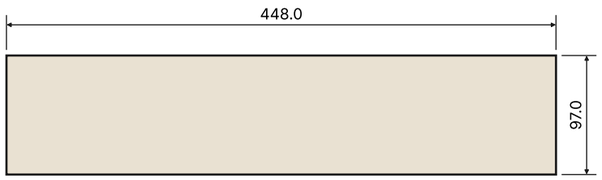


**lid-front, lid-back**

3 mm trucast-tint, 2 for the set

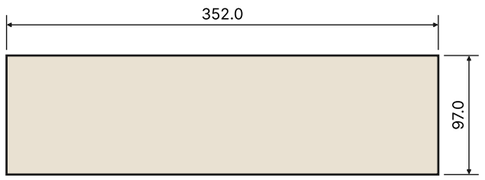


**lid-left, lid-right**

3 mm trucast-tint, 2 for the set


## Sheet parts: plain panels

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L1.dxf. Marks listed at the right.

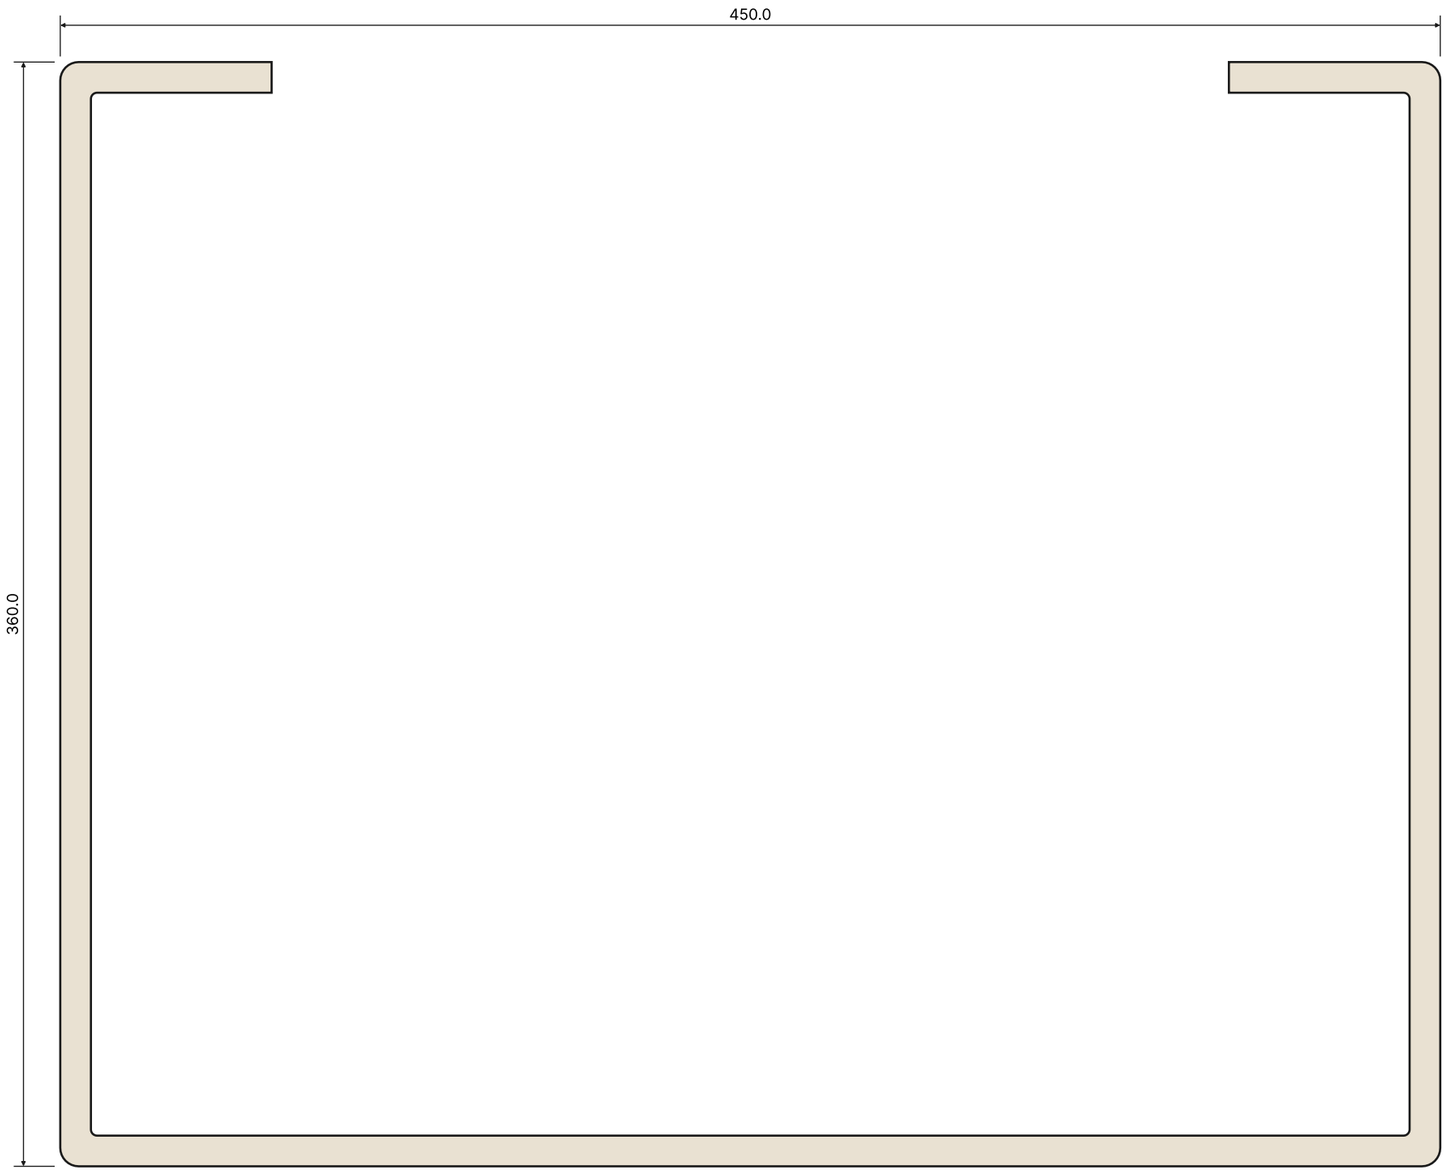


| mark | size | x | y | depth |
|---|---|---|---|---|

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

**plinth-L1: 9.5 mm trucast-tint, 1 for the set, seen from its outer face**

not in the cut file: the opening at 70, 355 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 380, 355 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 90, 355 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)


## Sheet part: plinth-L1

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L1-inlay.dxf. Marks listed at the right.

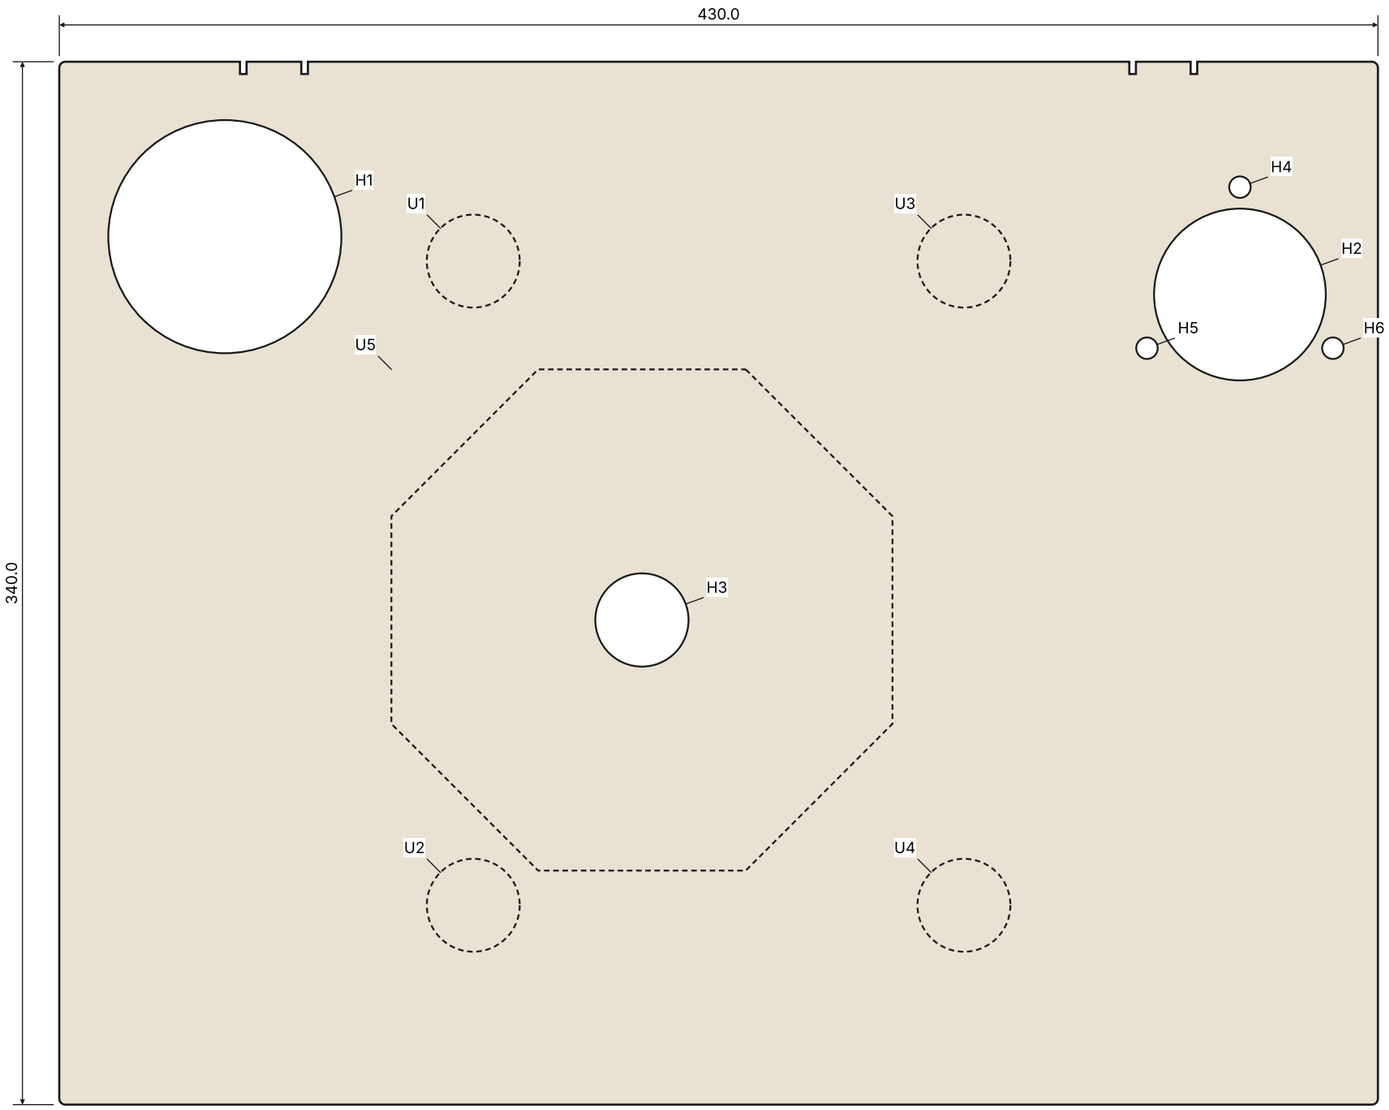


| mark | size | x | y | depth |
|---|---|---|---|---|
| H1 | Ø76.0 | 54.0 | 283.0 | through |
| H2 | Ø56.0 | 385.0 | 264.1 | through |
| H3 | Ø30.4 | 190.0 | 158.0 | through |
| H4 | Ø7.0 | 385.0 | 299.1 | through |
| H5 | Ø7.0 | 354.7 | 246.6 | through |
| H6 | Ø7.0 | 415.3 | 246.6 | through |
| U1 | Ø30.3 | 135.0 | 275.0 | 2 from inside |
| U2 | Ø30.3 | 135.0 | 65.0 | 2 from inside |
| U3 | Ø30.3 | 295.0 | 275.0 | 2 from inside |
| U4 | Ø30.3 | 295.0 | 65.0 | 2 from inside |
| U5 | profile (DXF) | 190.0 | 158.0 | 7 from inside |

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

**plinth-L1-inlay: 9.5 mm trucast-clear, 1 for the set, seen from its outer face**

inner-face pockets: dxf/plinth-L1-inlay-underside.dxf (seen from that face)

not in the cut file: the opening at 60, 338 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 80, 338 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 350, 338 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)

## Sheet part: plinth-L1-inlay

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L2.dxf. Marks listed at the right.




| mark | size | x | y | depth |
|---|---|---|---|---|

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

**plinth-L2: 9.5 mm trucast-tint, 1 for the set, seen from its outer face**

not in the cut file: the opening at 70, 355 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 380, 355 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 90, 355 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)


## Sheet part: plinth-L2

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L2-inlay.dxf. Marks listed at the right.

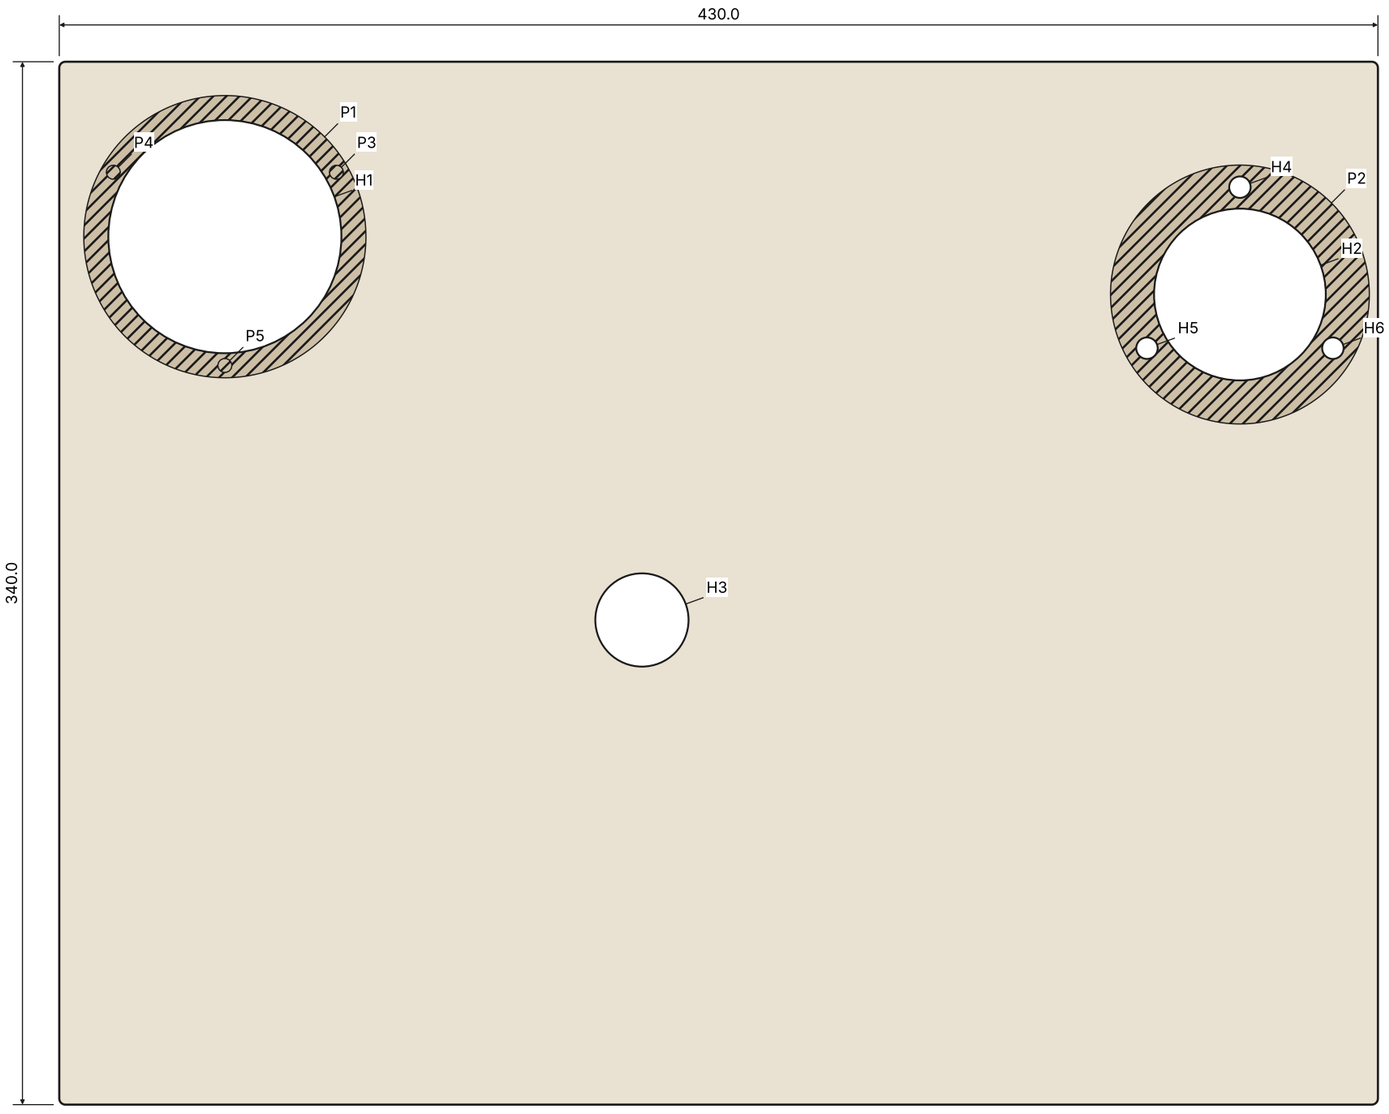


| mark | size | x | y | depth |
|---|---|---|---|---|
| P1 | Ø92.0 | 54.0 | 283.0 | 0.4 from face |
| P2 | Ø84.4 | 385.0 | 264.1 | 6.4 from face |
| P3 | Ø4.6 | 90.4 | 304.0 | 8.4 from face |
| P4 | Ø4.6 | 17.6 | 304.0 | 8.4 from face |
| P5 | Ø4.6 | 54.0 | 241.0 | 8.4 from face |
| H1 | Ø76.0 | 54.0 | 283.0 | through |
| H2 | Ø56.0 | 385.0 | 264.1 | through |
| H3 | Ø30.4 | 190.0 | 158.0 | through |
| H4 | Ø7.0 | 385.0 | 299.1 | through |
| H5 | Ø7.0 | 354.7 | 246.6 | through |
| H6 | Ø7.0 | 415.3 | 246.6 | through |

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

**plinth-L2-inlay: 9.5 mm trucast-clear, 1 for the set, seen from its outer face**

not in the cut file: the opening at 60, 338 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 80, 338 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)
and: the opening at 350, 338 rounded over from the outer face (1 faces, 0 to 0 deg off the sheet)


## Sheet part: plinth-L2-inlay

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/plinth-L3.dxf. Marks listed at the right.

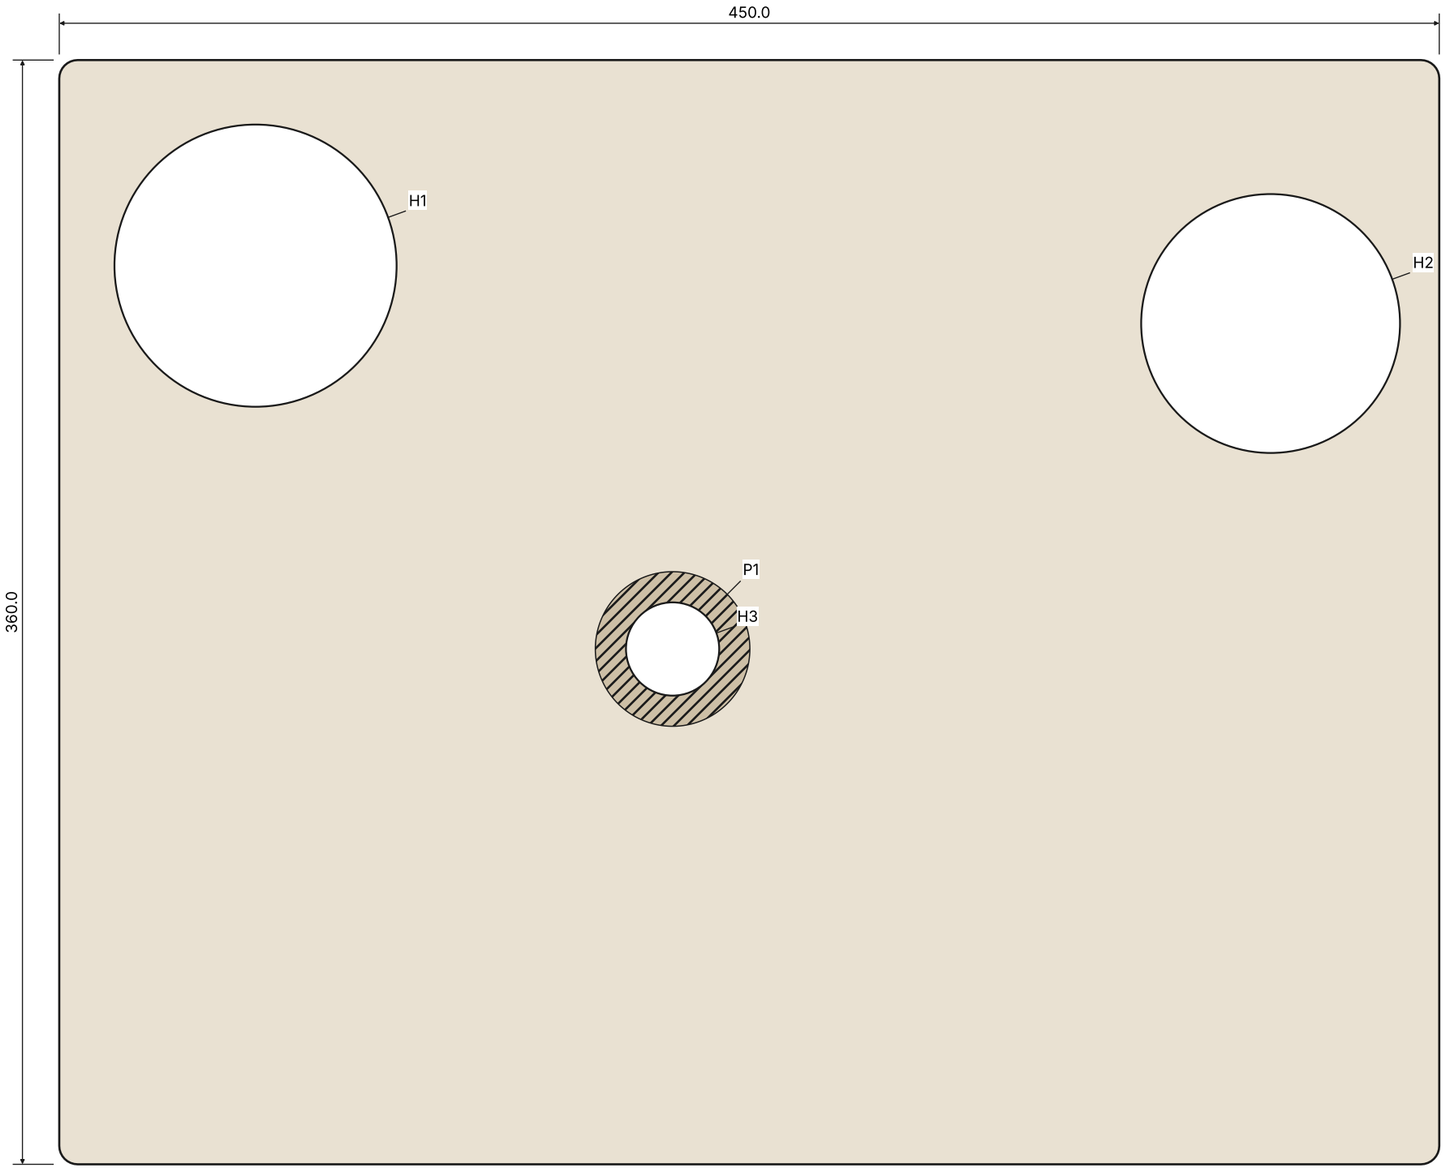


| mark | size | x | y | depth |
|---|---|---|---|---|
| P1 | Ø50.4 | 200.0 | 168.0 | 5 from face |
| H1 | Ø92.0 | 64.0 | 293.0 | through |
| H2 | Ø84.4 | 395.0 | 274.1 | through |
| H3 | Ø30.4 | 200.0 | 168.0 | through |

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

**plinth-L3: 5.6 mm trucast-tint, 1 for the set, seen from its outer face**


## Sheet part: plinth-L3

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2. As the router sees it from the outer face; DXF: dxf/base-L1.dxf. Marks listed at the right.

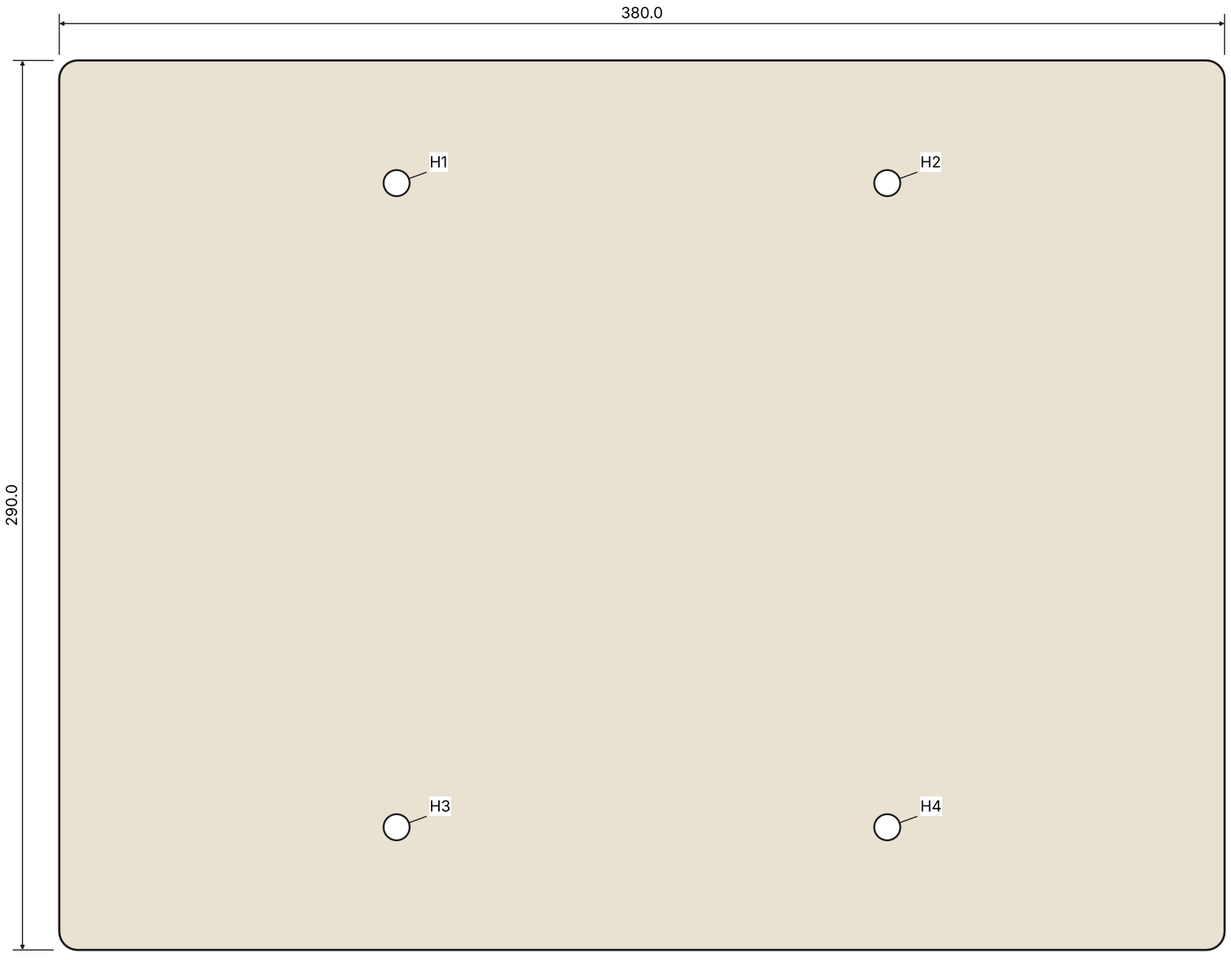


**base-L1: 12.7 mm trucast-tint, 1 for the set, seen from its outer face**

| mark | size | x | y | depth |
|---|---|---|---|---|
| H1 | Ø8.5 | 110.0 | 250.0 | through |
| H2 | Ø8.5 | 270.0 | 250.0 | through |
| H3 | Ø8.5 | 110.0 | 40.0 | through |
| H4 | Ø8.5 | 270.0 | 40.0 | through |

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

## Sheet part: base-L1

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint


mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/motor-plate.dxf. Marks listed at the right.

| mark | size | x | y | depth |
|---|---|---|---|---|
| H1 | Ø26.0 | 45.0 | 45.0 | through |

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

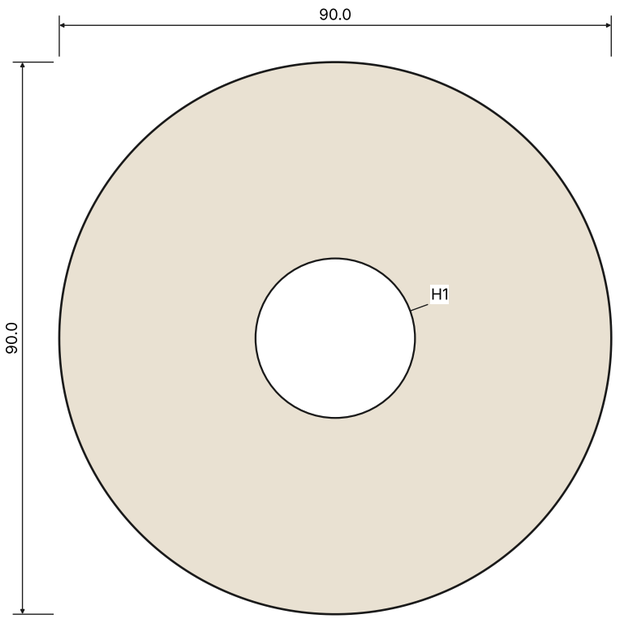


**motor-plate: 3 mm aluminium, 1 for the set, seen from its outer face**


## Sheet part: motor-plate

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/rear-plate.dxf. Marks listed at the right.

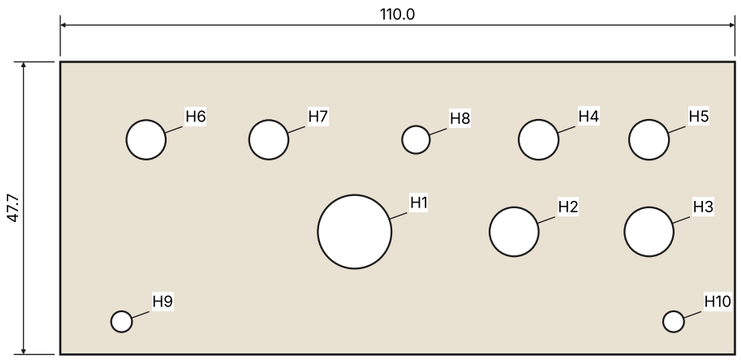


**rear-plate: 2 mm brass-sheet, 1 for the set, seen from its outer face**

| mark | size | x | y | depth |
|---|---|---|---|---|
| H1 | Ø12.0 | 48.0 | 20.0 | through |
| H2 | Ø8.0 | 74.0 | 20.0 | through |
| H3 | Ø8.0 | 96.0 | 20.0 | through |
| H4 | Ø6.5 | 78.0 | 35.0 | through |
| H5 | Ø6.5 | 96.0 | 35.0 | through |
| H6 | Ø6.4 | 14.0 | 35.0 | through |
| H7 | Ø6.4 | 34.0 | 35.0 | through |
| H8 | Ø4.5 | 58.0 | 35.0 | through |
| H9 | Ø3.4 | 10.0 | 5.4 | through |
| H10 | Ø3.4 | 100.0 | 5.4 | through |

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

## Sheet part: rear-plate

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint


mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

**9. post-1, post-2, post-3, post-4: lathe, stainless; 29 cm3 each; 4 for the set; 1:1**


solid 303 stainless 30 × 42, turned, ends faced, polished to a mirror; tapped M8 × 16 from below; bonded 2 mm up into a seat under the deck with a structural methacrylate (Plexus MA310 kind, which bonds acrylic to stainless); the foot's stud holds it to the base from below: nothing shows




FRONT





FROM THE RIGHT





FROM ABOVE

**10. platter: lathe, cast-acrylic; 1467 cm3 each; 1 for the set; 1:5**


tinted 3 / clear 12.7 / tinted 5.6 cemented, annealed, turned to 300 × 21 as Outcrop's; six blind 5.6 holes from below for bonded brass M4 inserts, the record side unbroken




FRONT




FROM THE RIGHT

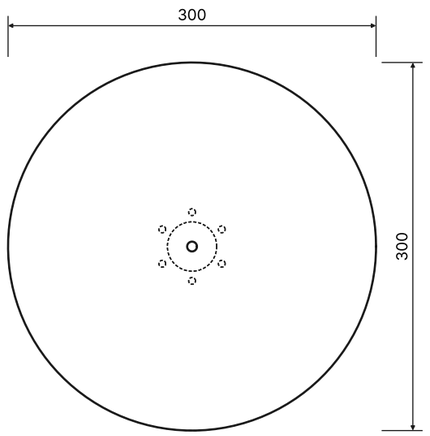


FROM ABOVE

## Printed and machined parts


Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.


**11. platter-hub: lathe, brass-leadfree; 32 cm3 each; 1 for the set; 1:2**




FRONT





FROM THE RIGHT





FROM ABOVE

**14. spindle: lathe, stainless-440c; 5 cm3 each; 1 for the set; 1:2**

as Outcrop's: 440C, 58 HRC, ground 10 g5; a vent flat 1.0 x 0.3 along the journals




FRONT




FROM THE RIGHT




FROM ABOVE

## Printed and machined parts

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint


mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

**15. bearing-housing: lathe, brass-leadfree; 32 cm3 each; 1 for the set; 1:1**


as Outcrop's: M30 × 1.5, clamped by its nut on a disc spring and a brass washer under the plinth (about 1.5 kN), hanging 20 into the float where its brass shows; 1.0 ml of oil

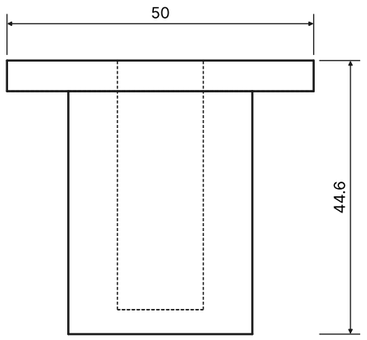


FRONT

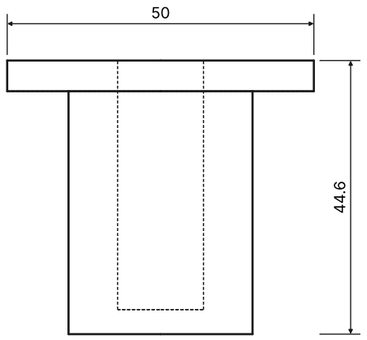



FROM THE RIGHT

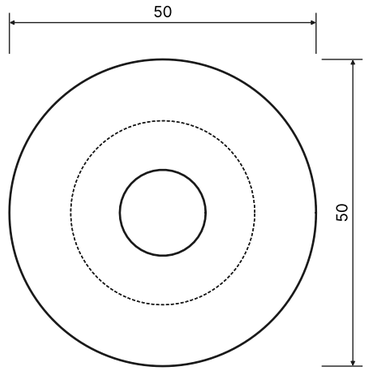



FROM ABOVE


**16. bearing-nut: lathe, brass-leadfree; 7 cm3 each; 1 for the set; 1:1**




FRONT




FROM THE RIGHT

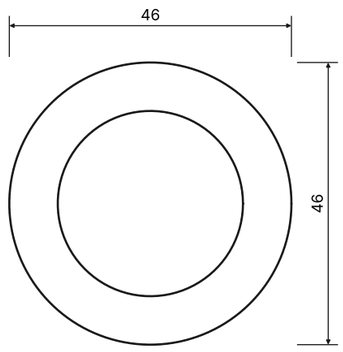


FROM ABOVE

## Printed and machined parts


Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.


**18. bearing-washer: lathe, brass-leadfree; 7 cm3 each; 1 for the set; 1:1**




**FRONT**





**FROM THE RIGHT**

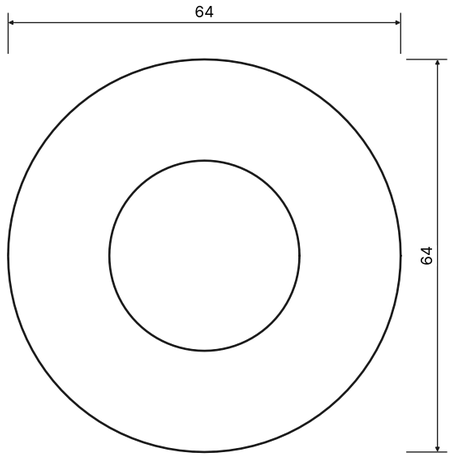



**FROM ABOVE**

**25. pulley: lathe, aluminium; 11 cm3 each; 1 for the set; 1:1**


belt face 32.80 at 300 rpm: PROPOSAL, not turned until the bench test (STOCK-AND-AUDIT.md 3.1)




**FRONT**




**FROM THE RIGHT**




**FROM ABOVE**

## Printed and machined parts


Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle


Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.


**27. arm-puck: lathe, aluminium; 60 cm3 each; 1 for the set; 1:2**




FRONT





FROM THE RIGHT





FROM ABOVE

**30. feet: lathe, stainless; 42 cm3 each; 1 for the set; 1:5**


four, directly under the posts (one grid), turned 303 stainless, 36 × 8 with a 30 neck, on M8 studs through the base into the posts, levelled and locked; Sorbothane under. They locate and level; no isolation is claimed




FRONT




FROM THE RIGHT

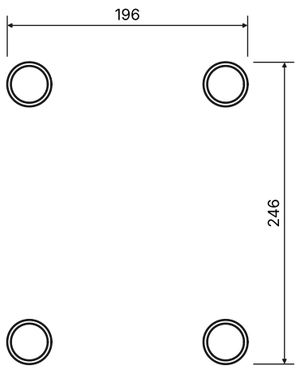


FROM ABOVE

## Printed and machined parts

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint


mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

**37. hinge-blocks: cnc-mill, cast-acrylic; 15 cm3 each; 1 for the set; 1:5**


two 40 × 9.5 blocks of the color, each with the hinge's slot 3.2 × 12 × 18 deep, on two M4 screws into inserts in the plinth's back edge (horizontal, in shear)




**FRONT**




**FROM THE RIGHT**




**FROM ABOVE**

## Printed and machined parts

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

| no. | item | make | qty | what | size | each USD |
|---|---|---|---|---|---|---|
| 1 | plinth-L1 | cut | 1 | 9.5 mm Cell-cast acrylic sheet, stock tint in the line codes (TruCast 2423 Ember, 2092 Poison, 2287 Haze, 2069 Ice, 2074 Smoke), 4 × 8 ft | 450 × 360 | 42.32 |
| 2 | plinth-L1-inlay | cut | 1 | 9.5 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft | 430 × 340 | 20.83 |
| 3 | plinth-L2 | cut | 1 | 9.5 mm Cell-cast acrylic sheet, stock tint in the line codes (TruCast 2423 Ember, 2092 Poison, 2287 Haze, 2069 Ice, 2074 Smoke), 4 × 8 ft | 450 × 360 | 42.32 |
| 4 | plinth-L2-inlay | cut | 1 | 9.5 mm Cell-cast acrylic sheet, water-clear, 4 × 8 ft | 430 × 340 | 20.83 |
| 5 | plinth-L3 | cut | 1 | 5.6 mm Cell-cast acrylic sheet, stock tint in the line codes (TruCast 2423 Ember, 2092 Poison, 2287 Haze, 2069 Ice, 2074 Smoke), 4 × 8 ft | 450 × 360 | 24.95 |
| 6 | base-L1 | cut | 1 | 12.7 mm Cell-cast acrylic sheet, stock tint in the line codes (TruCast 2423 Ember, 2092 Poison, 2287 Haze, 2069 Ice, 2074 Smoke), 4 × 8 ft | 380 × 290 | 38.49 |
| 7 | led-channel | buy | 1 | any (Klus / Muzata kind) Black anodized aluminum U-channel about 7 × 7 (inside 5.2) for 5 mm strip, cut to four straight runs and mitred at 45 at the corners, bonded open face up into the deck's groove with a neutral-cure silicone; about 1.5 | | 30.00 |
| 8 | led-strip | buy | 1 | any (Waveform, LEDSupply, BTF kind) 24 V COB LED strip, dotless, 5 mm wide, 2700 K, CRI 90+, 5 W/m or less (about 4 W/m chosen; confirm on its data sheet), cut to four straight runs in the deck's groove; about 1.51 m used (about 6.0 W) | | 40.00 |
| 9 | post-1, post-2, post-3, post-4 | lathe | 4 | Stainless steel 304 | 35 × 35 × 46 | 16.69 |
| 10 | platter | lathe | 1 | Cast acrylic tube, tinted through | 310 × 310 × 22 | 169.57 |
| 11 | platter-hub | lathe | 1 | Brass C69300 (Eco Brass, lead-free) or C27450 | 80 × 80 × 27 | 70.92 |
| 12 | platter-screws | buy | 1 | Six M4 × 10 stainless socket button screws (ISO 7380), up through the hub into the platter's inserts | | 6.00 |
| 13 | platter-inserts | buy | 1 | any (E-Z Lok / Tappex kind) Six M4 brass threaded inserts for bonding into plastics, 5.6 OD x 8, epoxy-bonded into the platter from below (no thread-locker near acrylic) | | 9.00 |
| 14 | spindle | lathe | 1 | Stainless steel 440C, hardened 58 HRC and ground | 20 × 20 × 85 | 127.03 |
| 15 | bearing-housing | lathe | 1 | Brass C69300 (Eco Brass, lead-free) or C27450 | 60 × 60 × 55 | 74.48 |
| 16 | bearing-nut | lathe | 1 | Brass C69300 (Eco Brass, lead-free) or C27450 | 56 × 56 × 18 | 53.23 |
| 17 | bearing-spring | buy | 1 | Schnorr / Mubea / Christianson kind One DIN 2093 group 2 series C disc spring 63 x 31 × 1.8 (51CrV4), under the bearing nut; load and rate to confirm in the maker's table | | 6.00 |
| 18 | bearing-washer | lathe | 1 | Brass C69300 (Eco Brass, lead-free) or C27450 | 74 × 74 × 13 | 55.68 |
| 19 | bushes | buy | 1 | any lathe shop Two solid bronze plain bushes (C932 / SAE 660), 10 × 14 × 12, pressed into the housing and honed or line-reamed to 10 H6 (8-12 um running clearance on a 10 g5 spindle) | | 40.00 |
| 20 | ball | buy | 1 | Tungsten carbide ball, 6 mm, grade 10: the spindle's thrust point, seated in a cup at the spindle's foot | | 5.00 |
| 21 | thrust-plate | buy | 1 | Thrust plate 13.8 × 3, hardened 52100 steel (60 HRC) lapped flat, at the foot of the housing's bore in the oil bath, under the carbide ball (a sapphire window of the same size is the alternative) | | 20.00 |
| 22 | motor-plate | cut | 1 | 3 mm Aluminium 5052 sheet | 90 × 90 | 1.62 |

## Parts list (1 of 3)

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

| no. | item | make | qty | what | size | each USD |
|---|---|---|---|---|---|---|
| 23 | motor | buy | 1 | Rega 24 V low-vibration synchronous motor upgrade kit (motor, its board and mounting), for the Neo PSU | | 265.00 |
| 24 | motor-screws | buy | 1 | Three M3 × 12 stainless button screws and three M3 brass inserts (4.6 OD), the motor plate hard to the pocket's shoulder as Rega fits its motor | | 6.00 |
| 25 | pulley | lathe | 1 | Aluminium 6061 | 49 × 49 × 22 | 46.31 |
| 26 | belt | buy | 1 | Flat turntable belt, ground rubber or polyurethane, 5 wide x 0.6, cut to the measured path (about 945 long for the 994 path, 5 % stretch); an O-ring test belt first | | 30.00 |
| 27 | arm-puck | lathe | 1 | Aluminium 6061 | 94 × 94 × 22 | 49.86 |
| 28 | arm | buy | 1 | Rega RB330 tonearm (9 in, Rega geometry: 222 mm from the platter's center to the arm's hole, effective length 236.5, overhang 14.5, offset 21.55 deg), with its own lead and cueing lift | | 675.00 |
| 29 | cartridge | buy | 1 | Ortofon 2M Black moving-magnet cartridge (nude Shibata stylus), black body, 1/2 in mount | | 750.00 |
| 30 | feet | lathe | 1 | Stainless steel 304 | 40 × 40 × 72 | 48.46 |
| 31 | foot-pads | buy | 1 | Isolate It (Sorbothane Inc.) Three Sorbothane discs 40 × 4, 50 duro, bonded under the brass feet: about 45 N each, 36 kPa | | 20.00 |
| 32 | foot-studs | buy | 1 | Three M8 × 30 stainless studs, three M8 brass lock nuts (thin), three M8 × 12 brass threaded inserts (for acrylic, epoxy-bonded) | | 18.00 |
| 33 | phono-stage | buy | 1 | Pro-Ject Phono Box S2, MM/MC phono stage in an aluminum case, 103 × 115 × 36 (one listing 103 × 36 × 115 mm, 0.57 kg): RIAA within 0.4 dB 20 Hz-20 kHz, MM S/N 94 dBA at 40/43 dB gain, THD under 0.01 %, subsonic filter 20 Hz 12 dB/oct, MM 47k | | 269.00 |
| 34 | phono-pads | buy | 1 | Four 10 mm felt pads under the phono stage | | 2.00 |
| 35 | rear-plate | cut | 1 | 2 mm Lead-free brass sheet (C26000 / C27450), brushed | 110 × 48 | 2.10 |
| 36 | rear-hardware | buy | 1 | Neutrik / Switchcraft / C&K / CUI kind For Strata's rear plate: two gold insulated panel RCA jacks (1/4 in hole); a 4 mm earth binding post; a 4PDT signal toggle with gold contacts (C&K 7411 kind); an SPST mini toggle for the light; an | | 70.00 |
| 37 | hinge-blocks | cnc-mill | 1 | Cast acrylic tube, tinted through | 45 × 15 × 58 | 46.57 |
| 38 | hinges | buy | 1 | Pro-Ject Replacement dust cover hinge for Debut series (rp-611), two: friction hinges that hold the lid open at any angle, a spring blade clamped to the lid's back wall, the foot in a slot (here a pocket in an acrylic block on the plinth's | | 34.00 |
| 39 | lid-top | cut | 1 | 3 mm Cell-cast acrylic sheet, stock tint in the line codes (TruCast 2423 Ember, 2092 Poison, 2287 Haze, 2069 Ice, 2074 Smoke), 4 × 8 ft | 448 × 358 | 13.23 |
| 40 | lid-front, lid-back | cut | 2 | 3 mm Cell-cast acrylic sheet, stock tint in the line codes (TruCast 2423 Ember, 2092 Poison, 2287 Haze, 2069 Ice, 2074 Smoke), 4 × 8 ft | 448 × 97 | 3.59 |
| 41 | lid-left, lid-right | cut | 2 | 3 mm Cell-cast acrylic sheet, stock tint in the line codes (TruCast 2423 Ember, 2092 Poison, 2287 Haze, 2069 Ice, 2074 Smoke), 4 × 8 ft | 352 × 97 | 2.82 |
| 42 | mark | buy | 1 | Laser etching into the cast acrylic, frosted, about 0.1 deep, from a vector file: EARF 44 wide, the etch filled with the color, deeper | | 15.00 |
| 43 | led-adapter | buy | 1 | Mean Well kind Desktop or wall adapter, 24 V DC, 12 W (0.5 A), UL/cUL 62368-1 listed and marked Class 2 / LPS (Mean Well GE12I24-P1J kind; read the label before ordering), 2.5 mm plug; the strip draws about 4.9 W | | 15.00 |

## Parts list (2 of 3)

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

| no. | item | make | qty | what | size | each USD |
|---|---|---|---|---|---|---|
| 44 | inserts | buy | 1 | any (E-Z Lok / Tappex kind) Brass threaded inserts for plastics, epoxy-bonded: 3 M5 (the puck), 4 M3 (the back plate); with M5 × 12 countersunk and M3 × 6 button screws | | 14.00 |
| 45 | wiring | buy | 1 | Shielded interconnects inside (the arm's lead to the S2, the S2 to the plate), a star earth at the plate's post (arm, bearing housing via an M3 ring tag, S2), two clear cord clips under the deck, a cord grip for the Neo's lead | | 25.00 |
| 46 | neo-psu | buy | 1 | Rega Neo PSU MK2: DSP-generated drive for Rega's 24 V motor, 33/45 by a button, fine speed trim (0.01 rpm steps) on the back; US 60 Hz 115-120 V version | | 445.00 |
| 47 | bearing-oil | buy | 1 | Turntable bearing oil, 8 ml (a light synthetic oil, ISO VG 32 or as the bush maker says) | | 15.00 |
| 48 | cement | buy | 1 | Evonik (Röhm) ACRIFIX 2R 0190, two-component polymerising cement for cast acrylic (cures through any tint, unlike the one-part light-curing 1R 0192); Weld-On 40 or 42 is the US equivalent | | 45.00 |

## Parts list (3 of 3)

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

## Notes

1. The deck (as built since v2): two 12.7 sheets of the flavor's stock tint, cemented flush with ACRIFIX 2R 0190 in a vacuum press (25.4, one bond line at mid-edge), annealed, fly-cut, the outline routed as one; the outer edge bead-blasted satin, the faces glassy. 450 × 360, corners R4. (v1's tinted-ring / clear-inlay strata, 24.3, are gone.)
2. The base: one 12.7 sheet of stock Smoke 2074, 380 × 290, corners R6, 35 in from the deck all round; the deck floats 40 over it.
3. The float: four solid 303 stainless posts bonded into 2 mm seats under the plinth, held to the base by the feet's M8 studs: rigid. The four feet (stainless on Sorbothane, levelled and locked) locate and level it; no isolation is claimed. For isolation, a platform at 3-5 Hz.
4. The light: the deck edge-lit, as a sign is: a 5 mm dotless 24 V COB strip of 5 W/m or less, in straight runs on a black U-channel in a 7.4 × 7 groove routed into the deck's underside 10 in from its edge, facing up into the slab under a bead-blasted ceiling; the light travels in the acrylic and out through its satin edge, not down onto the shelf (2026-11-03); a listed Class 2 24 V adapter of 12 W into the plate's 2.5 mm inlet, an SPST on the plate. No dimmer inside: with no clocked circuit, the record player keeps the PS1 path (the audit). The phono stage runs from its own listed adapter.
5. The rear plate: 2 mm brass on the base's back edge, under the deck's overhang; line out, earth post (the star earth), 4PDT stage / bypass, the light's switch, the two DC inlets and the Neo's; the rating engraved. Wiring and earth: strata_rear.py.
6. The motor: Rega 24 V on its plate, screwed hard to a shoulder in a pocket through the plinth as Rega fits it, below it in the float. The pulley waits for the motor's speed measured on the US Neo (300 rpm expected at 60 Hz).
7. The bearing, platter, arm puck and phono stage as Outcrop's (mantle_outcrop.py): a disc spring under the bearing's nut, 1.0 ml of oil, a vented 440C spindle; the platter screwed from below into bonded inserts; a 4PDT bypass.
8. Before the first sample: with the arm in hand, check its counterweight clears the lid's back wall.
9. The lid: 3 mm 2064, 1.1 kg, on Pro-Ject's friction hinges.

## Notes

Mantle: Strata Float v5, the lit deck, option C (proposal A): Belt-drive record player, a laminated plint

mm | issue 2026-11-03 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15