


Scale 1:2. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.

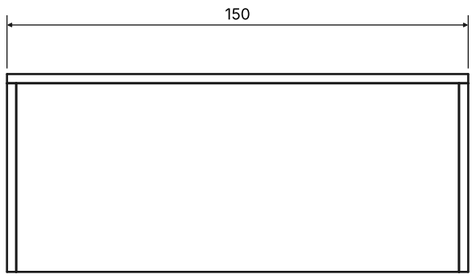

FROM THE RIGHT

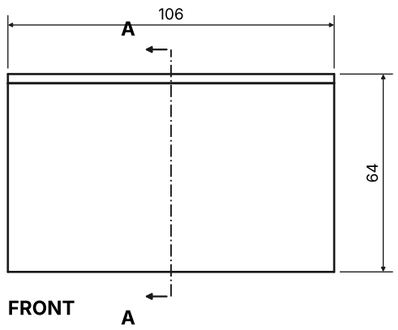

FRONT



FROM ABOVE


General arrangement

The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. Section A-A (sheet 1): the product cut at x 0.0 and seen from the right; cut faces hatched, a different angle for each part.

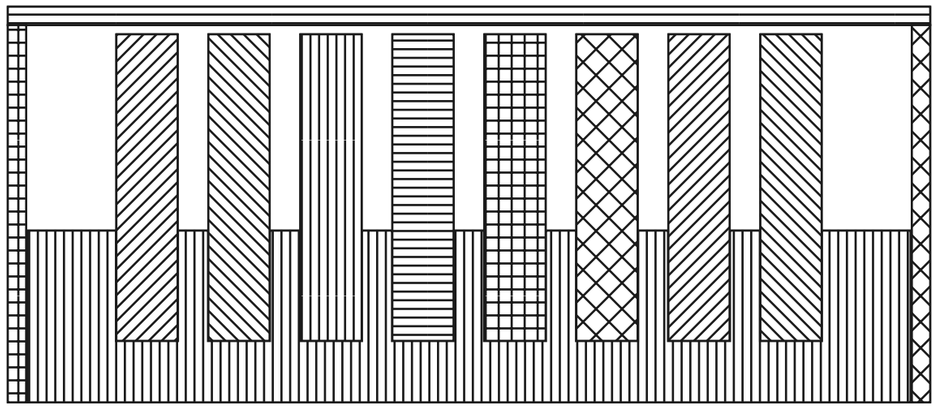


Section A-A

The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1, parts drawn apart. Balloons are the parts list's numbers (last sheet).

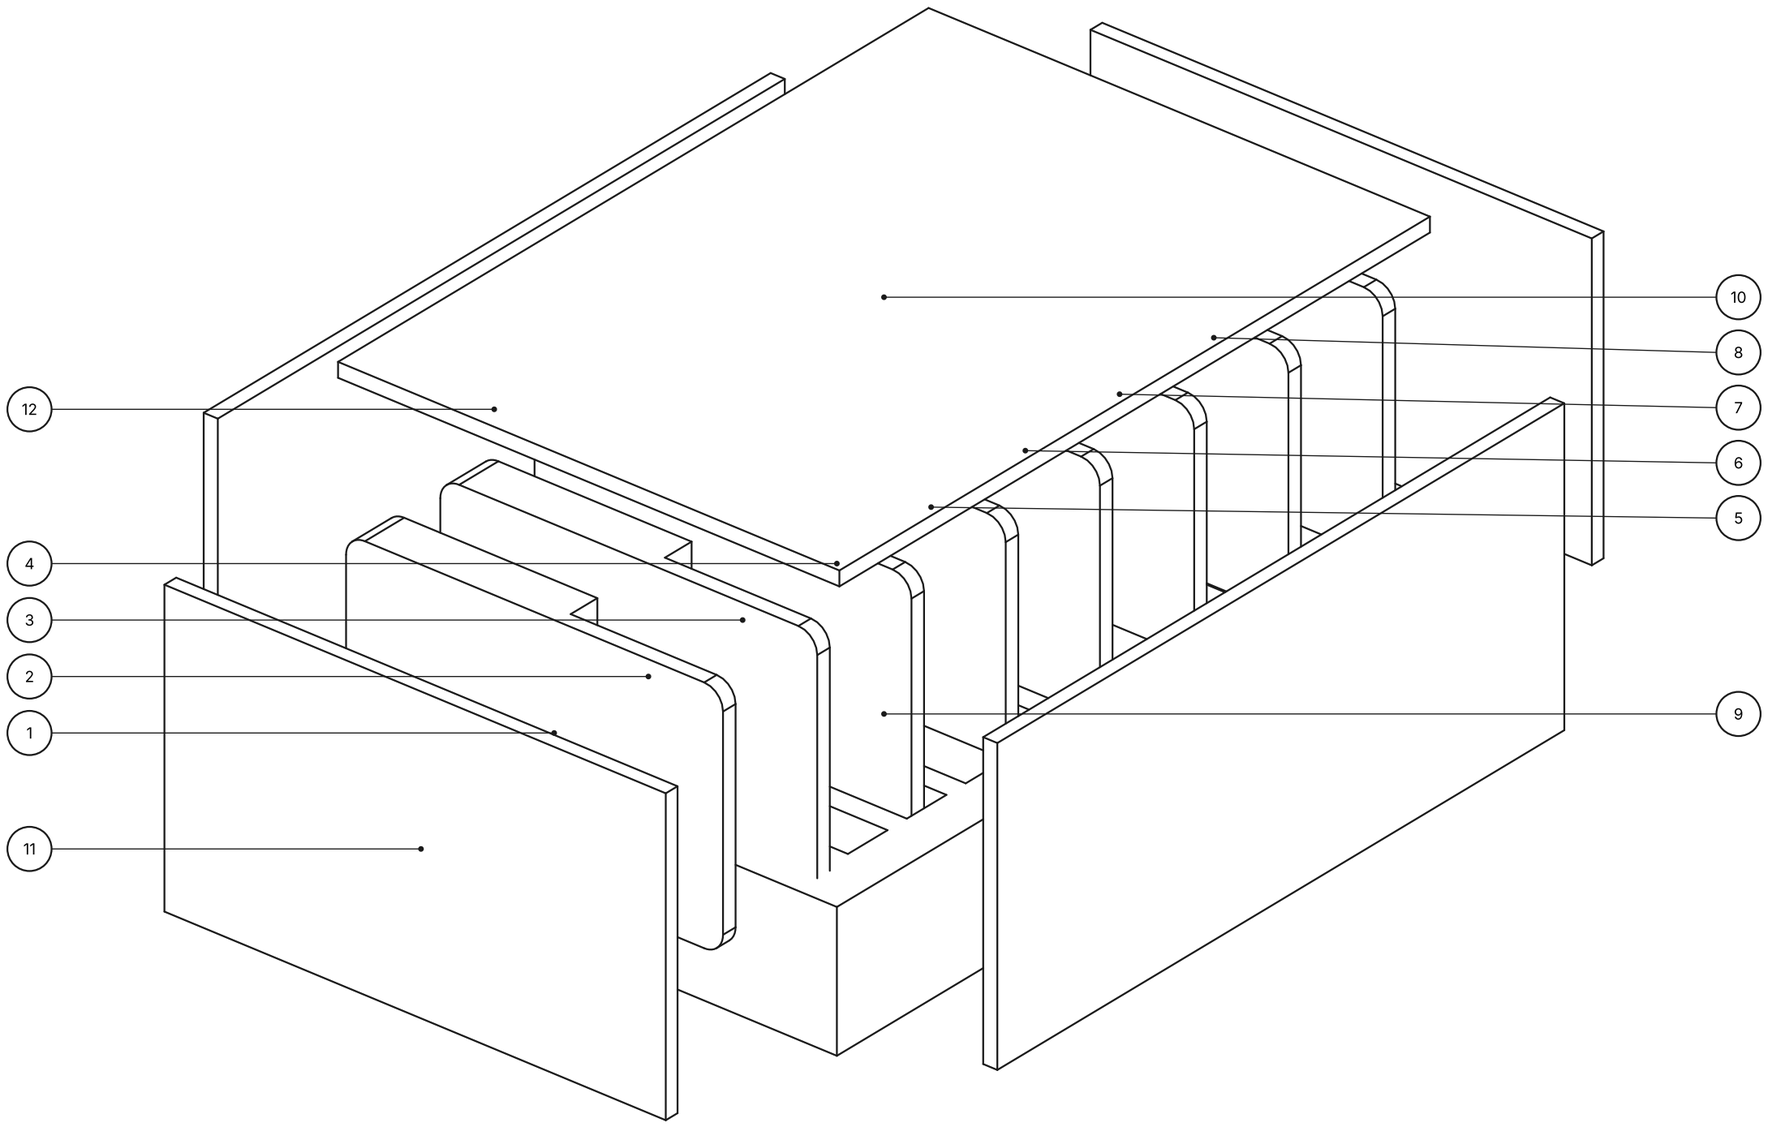


Exploded view

The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Scale 1:2. Panels cut to their outline only (DXF files in dxf/); sizes as seen from the outer face.

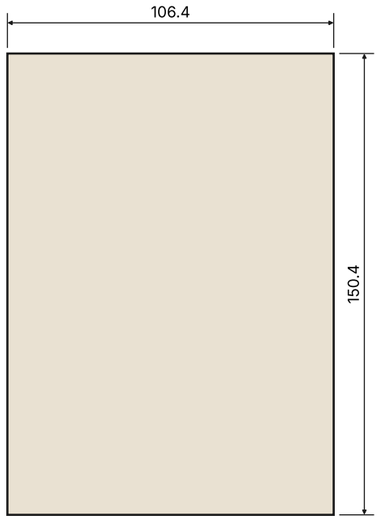

hood-top
3 mm acrylic, 1 for the set

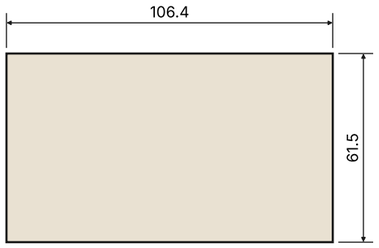

hood-front, hood-back
3 mm acrylic, 2 for the set

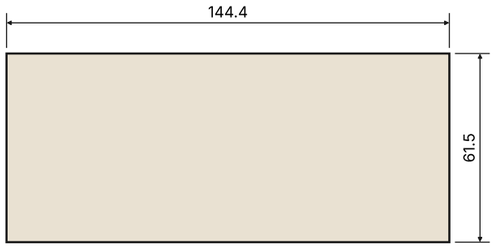

hood-left, hood-right
3 mm acrylic, 2 for the set

Sheet parts: plain panels

The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)


mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-1.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

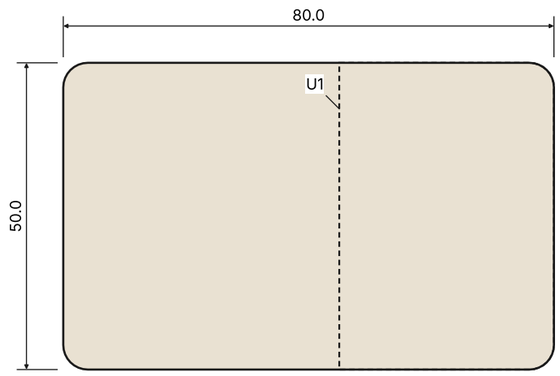

chip-1: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-1-underside.dxf (seen from that face)

Sheet part: chip-1


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-2.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

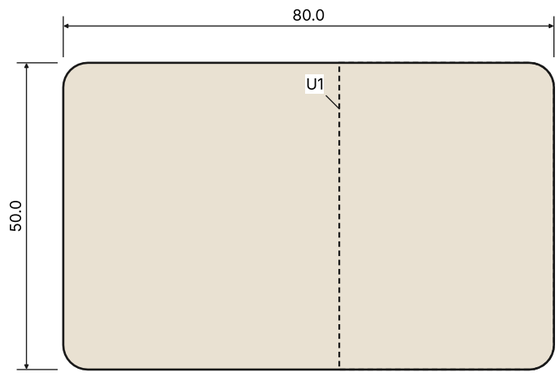

chip-2: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-2-underside.dxf (seen from that face)

Sheet part: chip-2


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-3.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

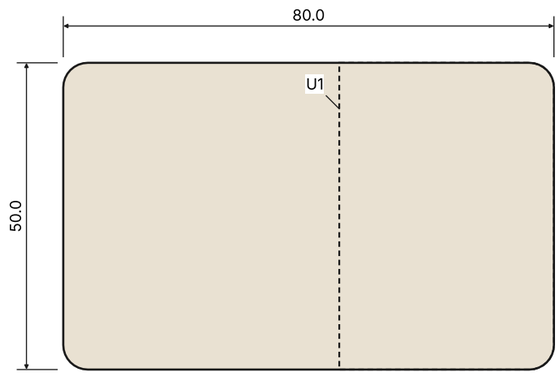

chip-3: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-3-underside.dxf (seen from that face)

Sheet part: chip-3


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-4.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

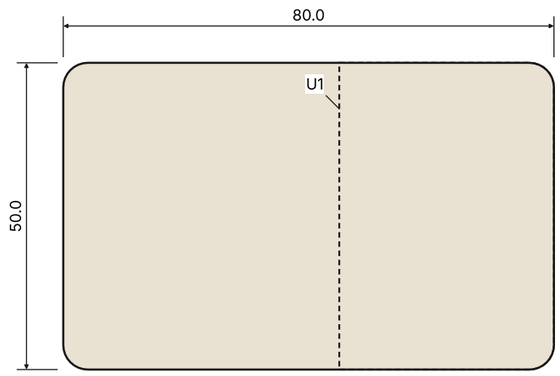

chip-4: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-4-underside.dxf (seen from that face)

Sheet part: chip-4


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-5.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

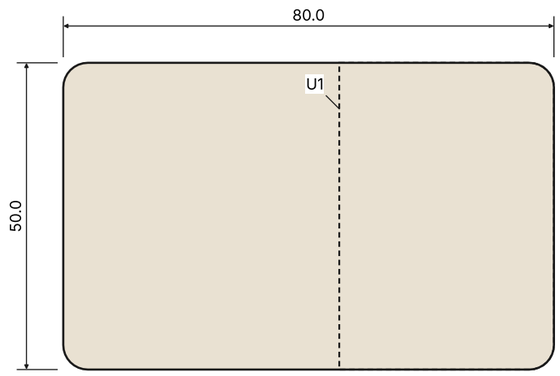

chip-5: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-5-underside.dxf (seen from that face)

Sheet part: chip-5


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-6.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

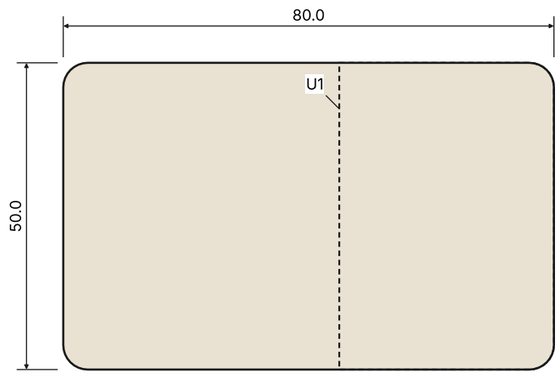

chip-6: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-6-underside.dxf (seen from that face)

Sheet part: chip-6


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-7.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

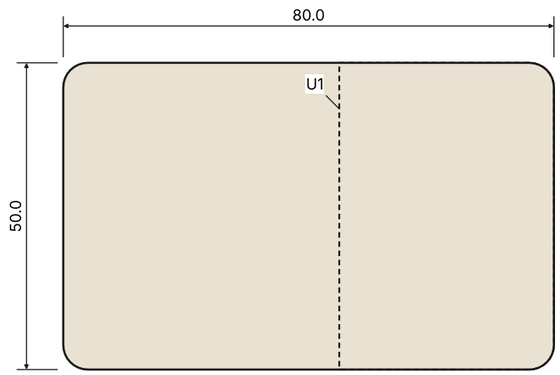

chip-7: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-7-underside.dxf (seen from that face)

Sheet part: chip-7


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:1. As the router sees it from the outer face; DXF: dxf/chip-8.dxf. Marks listed at the right.

mark	size	x	y	depth
U1	profile (DXF)	62.5	25.0	6.8 from inside

H: cut through. P: pocket from the face shown.
U: pocket from the inner face (dashed; its own DXF).
Centres from the lower-left corner,
seen from the outer face.

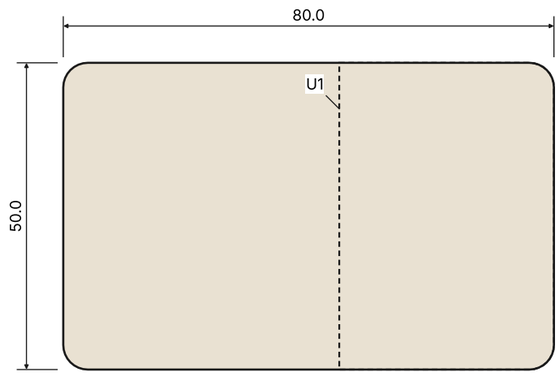

chip-8: 10 mm cast-acrylic, 1 for the set, seen from its outer face
inner-face pockets: dxf/chip-8-underside.dxf (seen from that face)

Sheet part: chip-8


The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle
Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

9. tray: cnc-mill, birch-hardwood; 286 cm3 each; 1 for the set; 1:5


solid birch 100 × 144 × 28, eight slots 80.6 × 10.1 × 18 at 15 pitch routed from the top; edges eased R1; oiled; four felt pads under it



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	chip-1	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
2	chip-2	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
3	chip-3	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
4	chip-4	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
5	chip-5	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
6	chip-6	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
7	chip-7	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
8	chip-8	cut	1	10 mm Cast acrylic, tinted through in the speaker's colour, 4 × 8 ft sheet	80 × 50	0.95
9	tray	cnc-mill	1	Birch, solid	110 × 154 × 38	52.72
10	hood-top	cut	1	3 mm Cast acrylic	106 × 150	2.40
11	hood-front, hood-back	cut	2	3 mm Cast acrylic	106 × 62	0.98
12	hood-left, hood-right	cut	2	3 mm Cast acrylic	144 × 62	1.33
13	engrave	buy	8	a laser shop (a CO2 laser, 100 W or more) Laser work on one Tint Library chip at about 100 sets: cut 80 × 50 R4 from 3/8" cast sheet (about 260 mm of cut), and the front's three lines engraved (the name, the code, LT at 9.5 and 3.2) and paint-		2.50
14	chip-step	buy	8	a CNC shop The step on one chip: a 35 × 50 flat-bottomed pocket milled from the back down to 3.2 (a 12 mm flat end mill, a vacuum fixture of 8), the floor fly-cut and polished clear, the edges polished		4.00
15	card	buy	1	any printer The particulars card, 140 × 95, 600 gsm uncoated, letterpress or digital: the eight tints, each one's stock code, LT at both depths, and where EARF uses it		2.00
16	felt	buy	1	Four self-adhesive felt pads, 12 mm, under the tray		0.40
17	sleeve	buy	1	A rigid mailer box with a foam insert for the case, 180 × 130 × 90		3.50

Notes

1. A proposal (round 43): idea (f), the Tint Library. For designers and architects specifying EARF colours, as the press mailer, and as a product that needs no certification.
2. Each chip shows its tint at two depths: 9.5 (shell, ball, base) and 3.2 (skin). Its LT at both is measured on the lot with a lux meter and engraved, so the card and the chip agree.
3. Stock stand-ins now (TruCast 2423, 2422, 2208, 9093, 2069, 1020, 3030, 2064); the custom tints later, the same files.

Parts list and notes

The Tint Library: EARF's eight tints as stepped chips in a case (a proposal)

mm | issue 2026-10-31 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15