



Lightning REAR


Version ledStripRGB

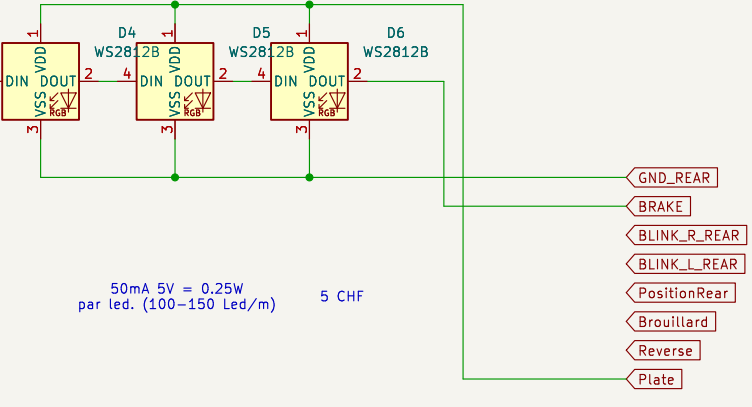

Version Max

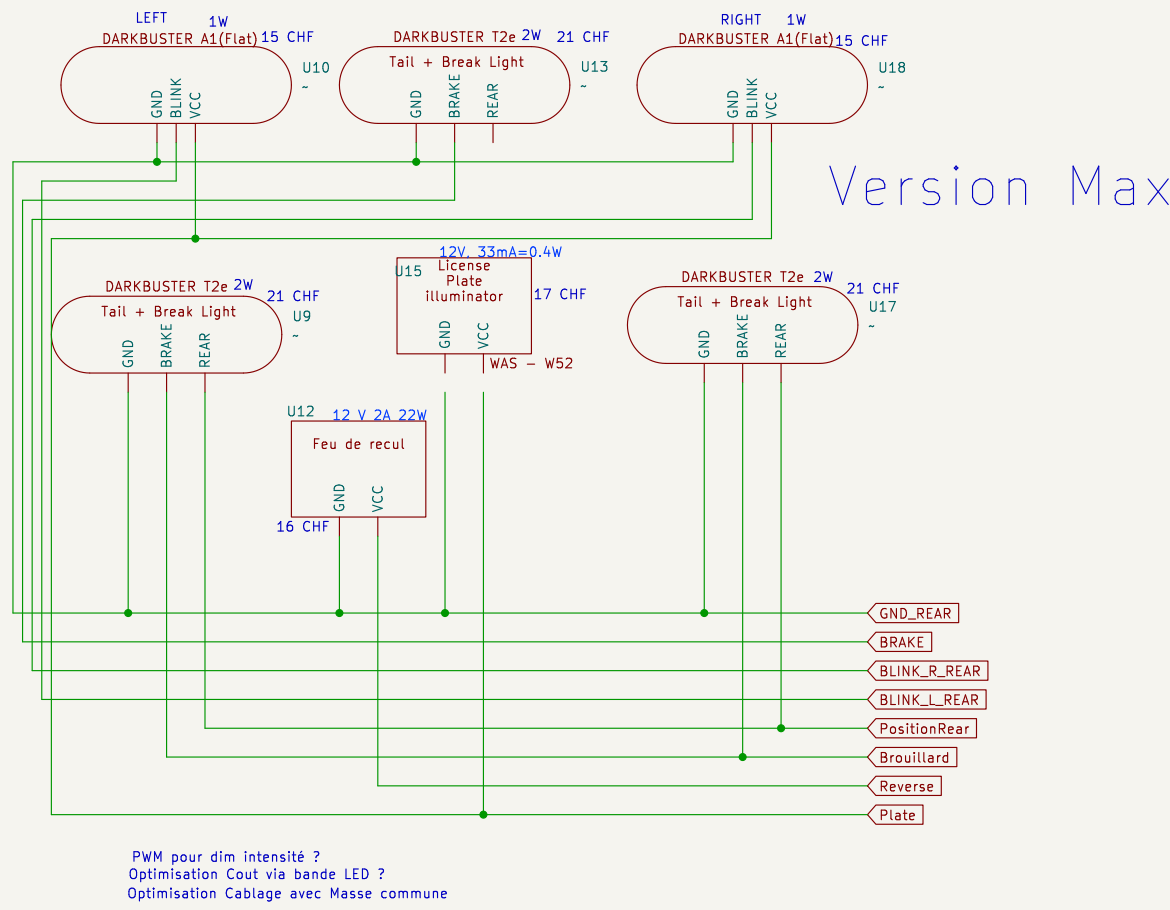



Version Lite

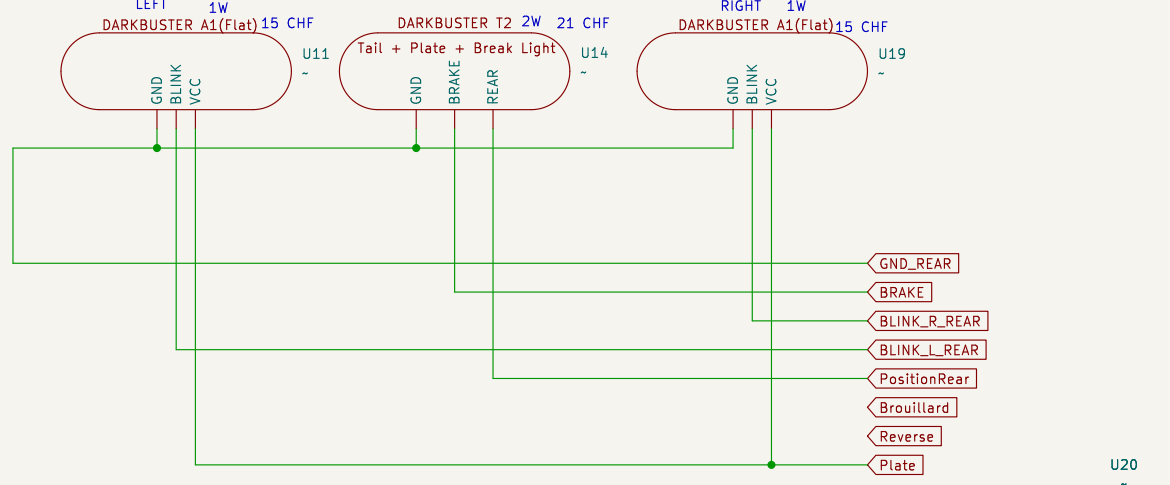

- Feu Position
- Brake Arriere
- Brouillard
- recul
- Plaque
- Cligno Droite
- Cligno Gauche
- Connecteur REMORQUE !
- proximity sensor

Velion HUD

écran CAN




Velion Appuie-tête

Trunk latch
Interior Lighting


Rearview Left

cligno Left
DRL Left

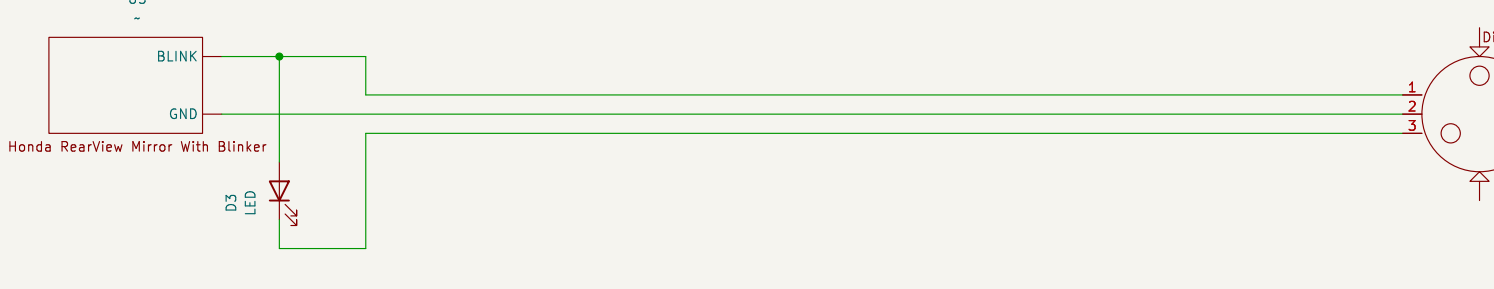

Rearview Right

cligno Right
DRL Right

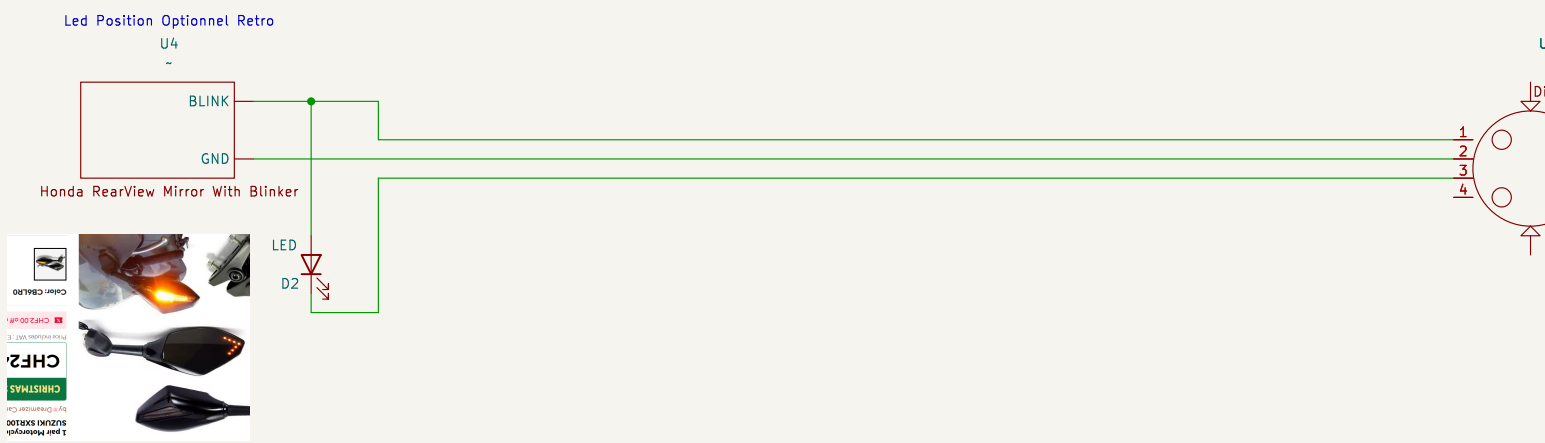


Front Right Empty Space

Degivreur




Guidon & Seat


Filovelox CAN

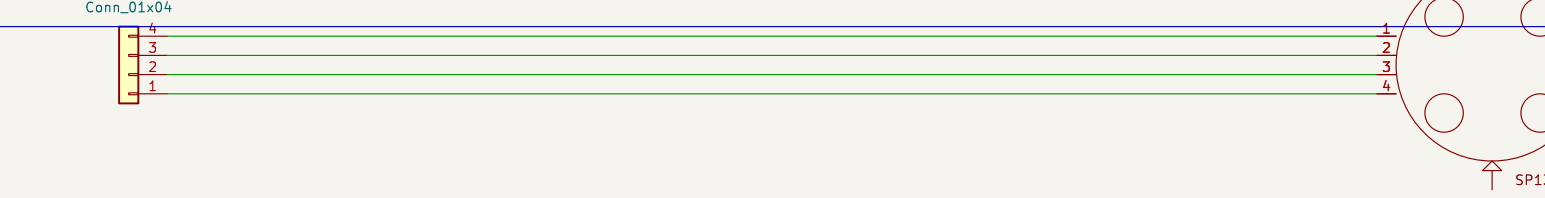


accelerator



hand heater
brake right switch
brake left switch

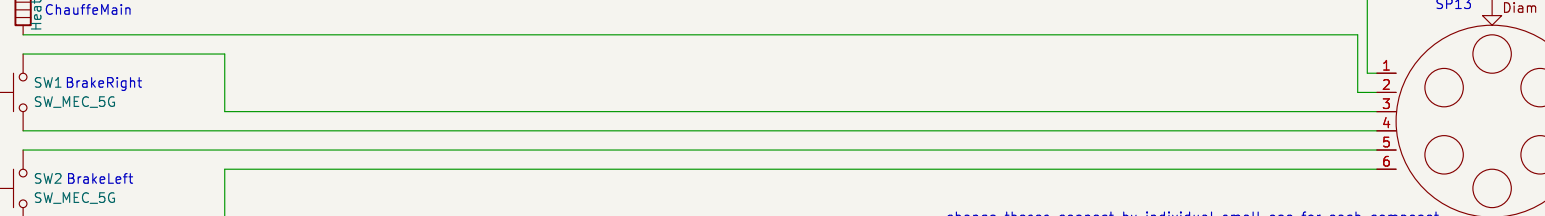

Seat switch
Seat heater

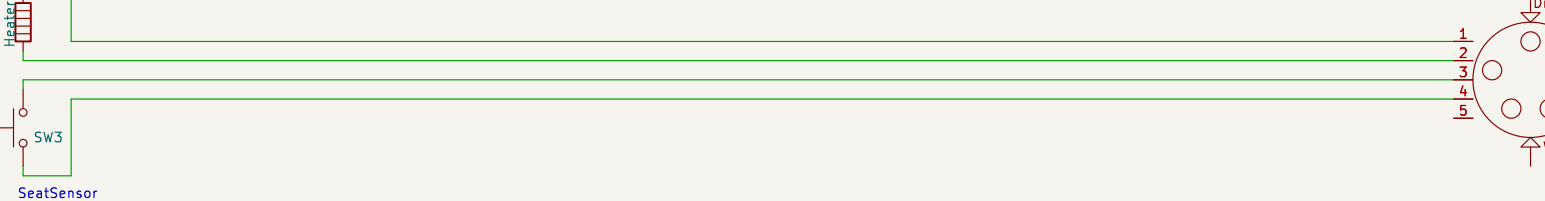


PAS




Bellow body


Controller

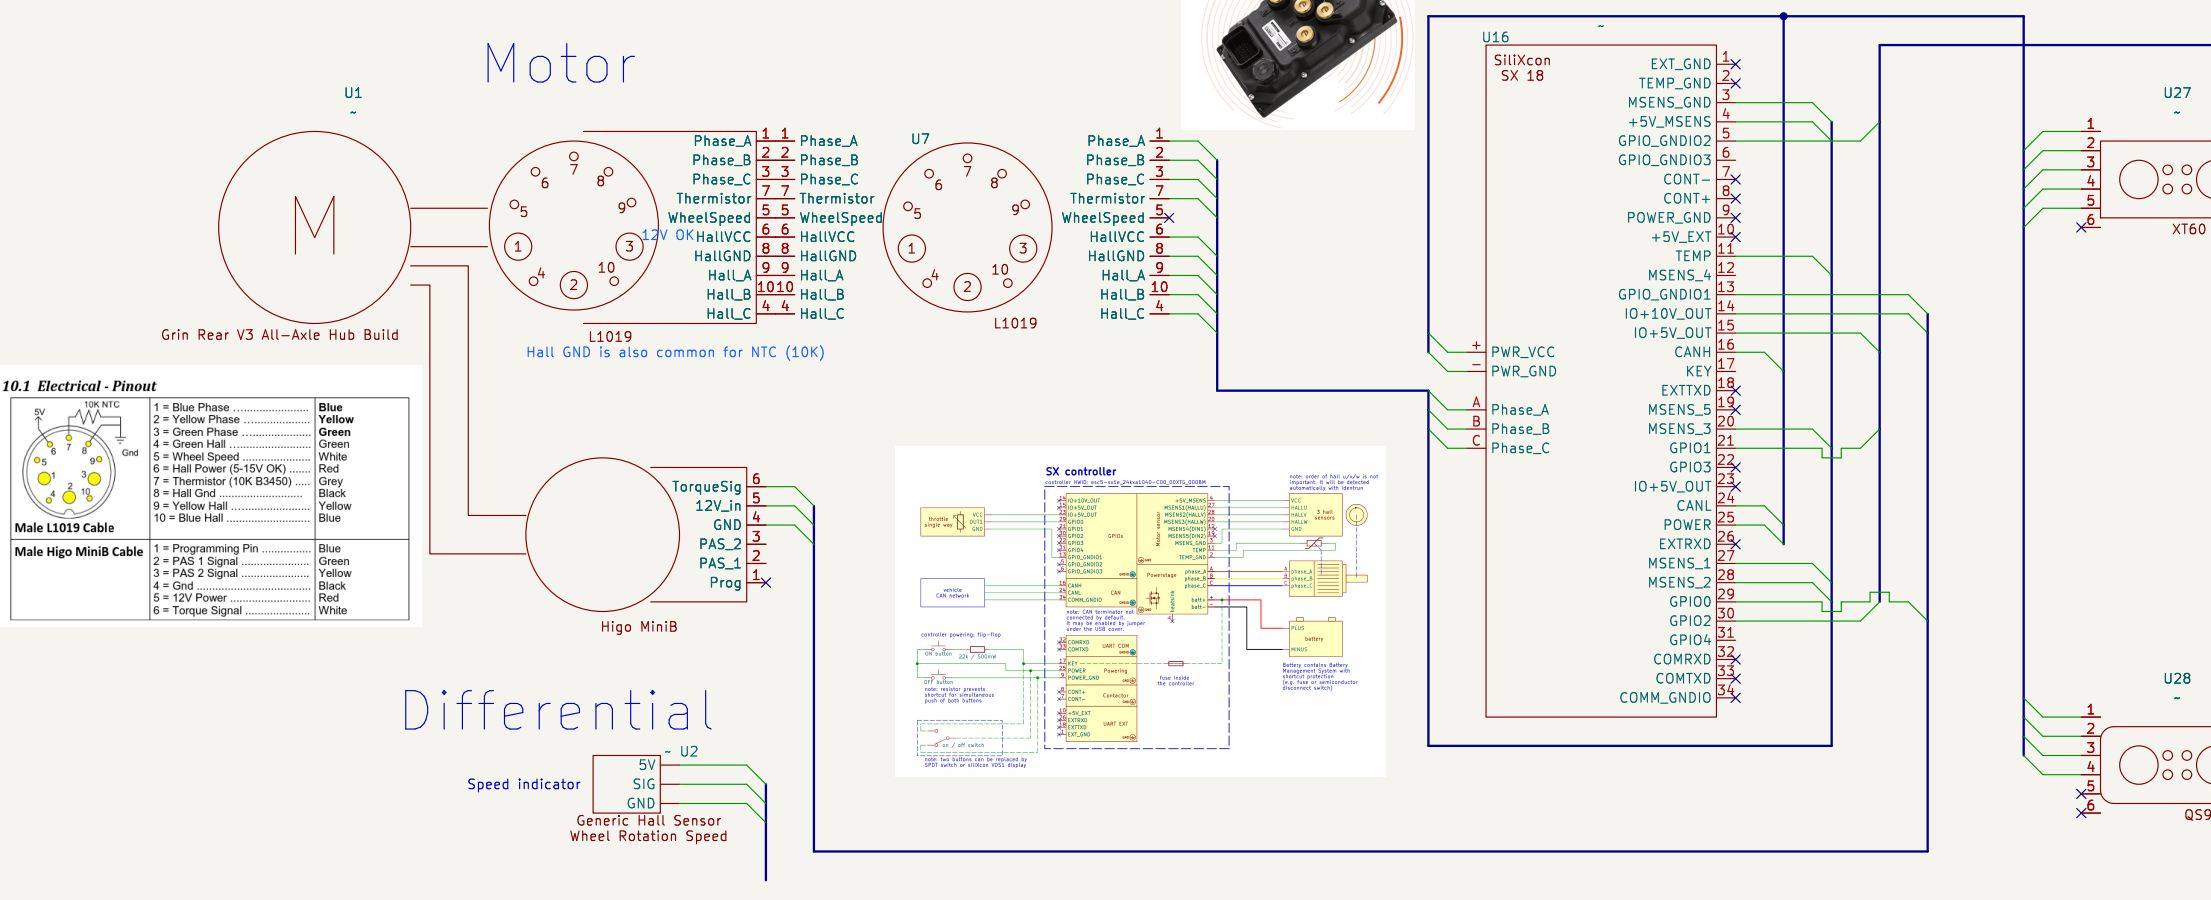

Lightning FRONT

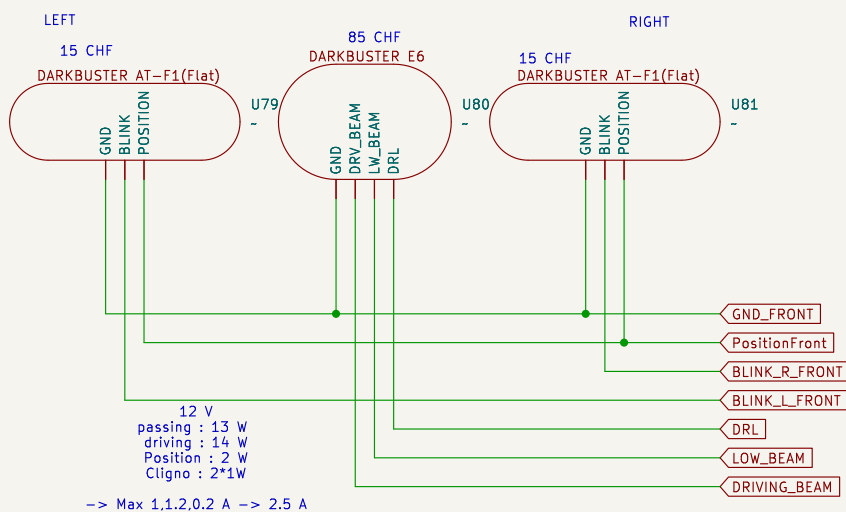

Klaxon





Daylight Sensor



- High Beam
- Position
- Low Beam
- DRL
- Cligno Droite
- Cligno Gauche
- Daylight sensor
- Klaxon
- proximity sensor

Dashboard

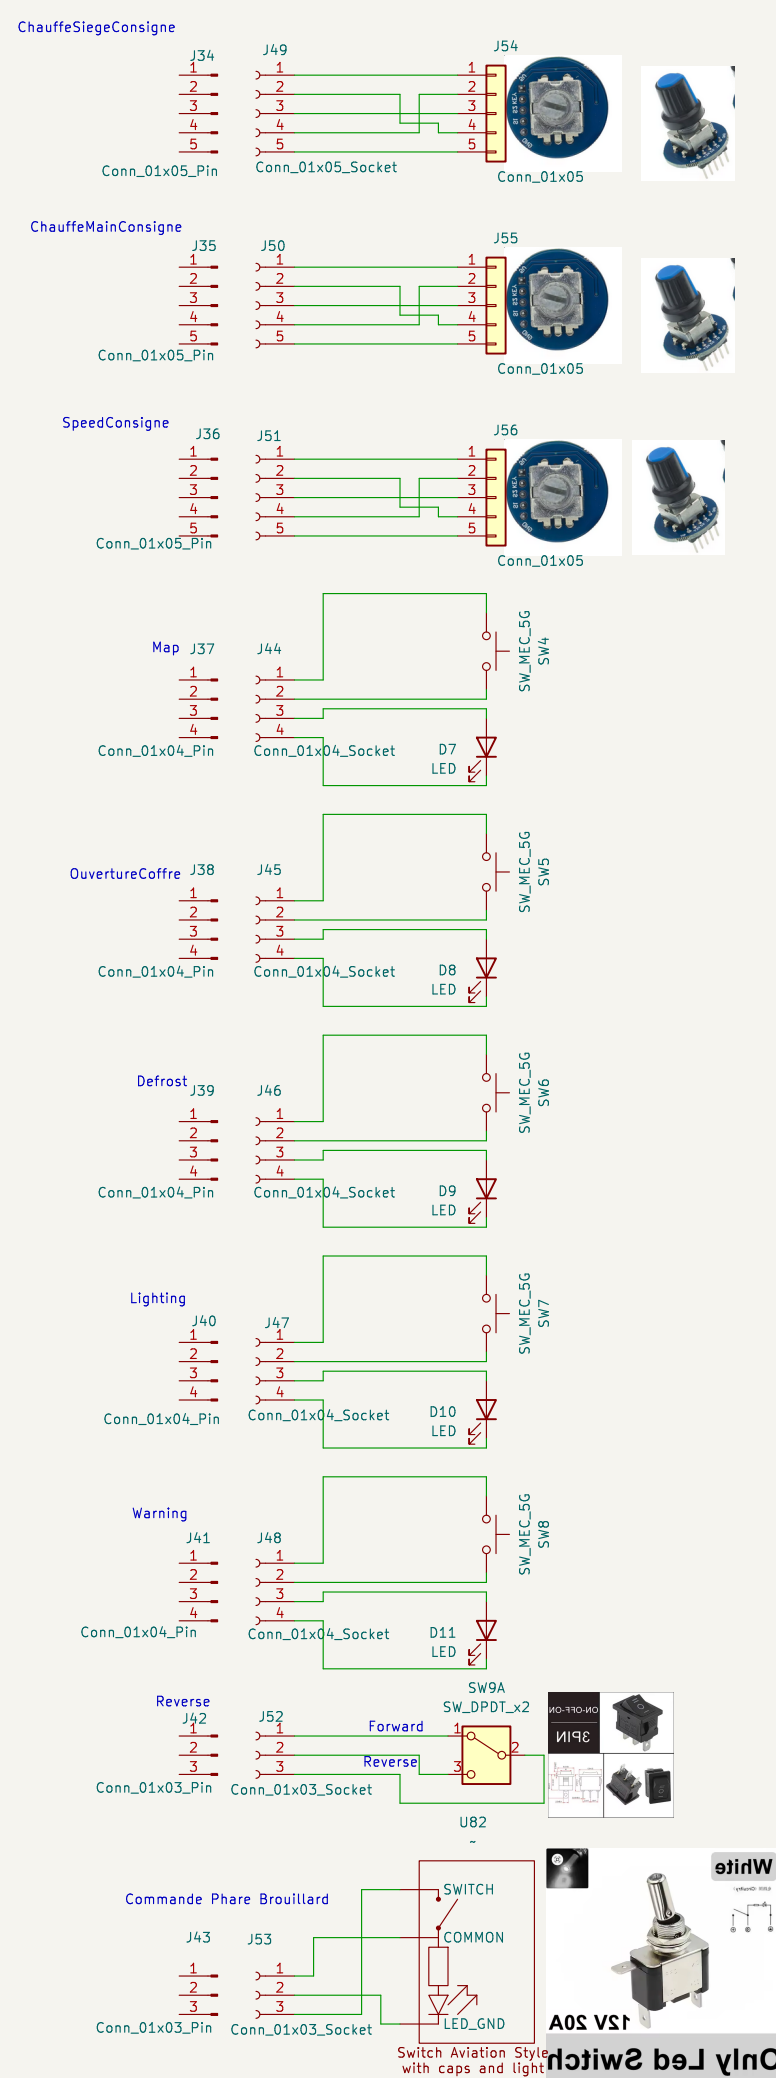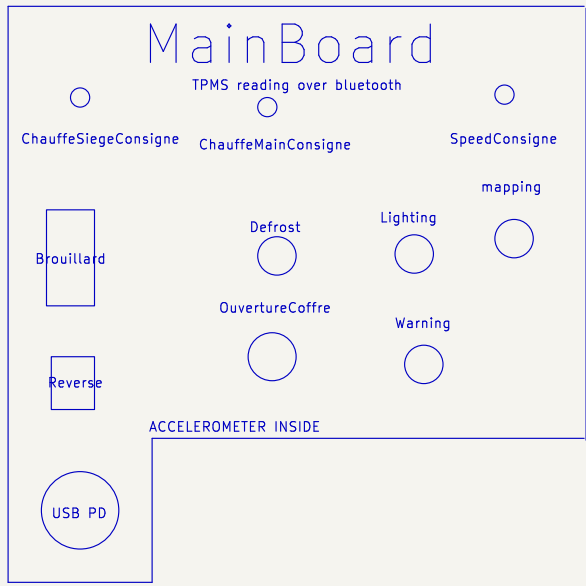

Can Bus Maximum Length

Bus Speed	Bus Length (ft)	Cable Stub Length (ft)	Node Distance (ft)
1 Kbit/Sec	40 meters (131 feet)	0.3 meters (1 foot)	40 meters (131.2 feet)
500 kbitu/Sec	100 meters (328 feet)	0.3 meters (1 foot)	100 meters (328 feet)
100 kbitu/Sec	500 meters (1640 feet)	0.3 meters (1 foot)	500 meters (1640 feet)
50 kbitu/Sec	1000 meters (3280 feet)	0.3 meters (1 foot)	1000 meters (3280 feet)

If a cable stub (unterminated cable) or T-connector is used to tap into the bus line, then the stub distance should not exceed 0.3m at 1Mbit/s rate per DS 102 Version 2.0.

Termination Resistors

Termination Resistors are used to impede reflections on the line. To determine the value of the termination resistors look at the impedance of the cable and match the resistors to it. For a normal CAN bus cable with a 120 ohm line impedance you should use 120 ohm resistors.

<https://electronics.stackexchange.com/questions/30803/can-bus-with-star-configuration-long-ways>

